MATSUYAMA ELEMENTARY SCHOOL 2023 FENCING

7680 Windbridge Drive Sacramento, CA 95831






EL DORADO HILLS, CA 95762 | (916) 985-187

SHEET NO.

PHONE: (916) 359-4000

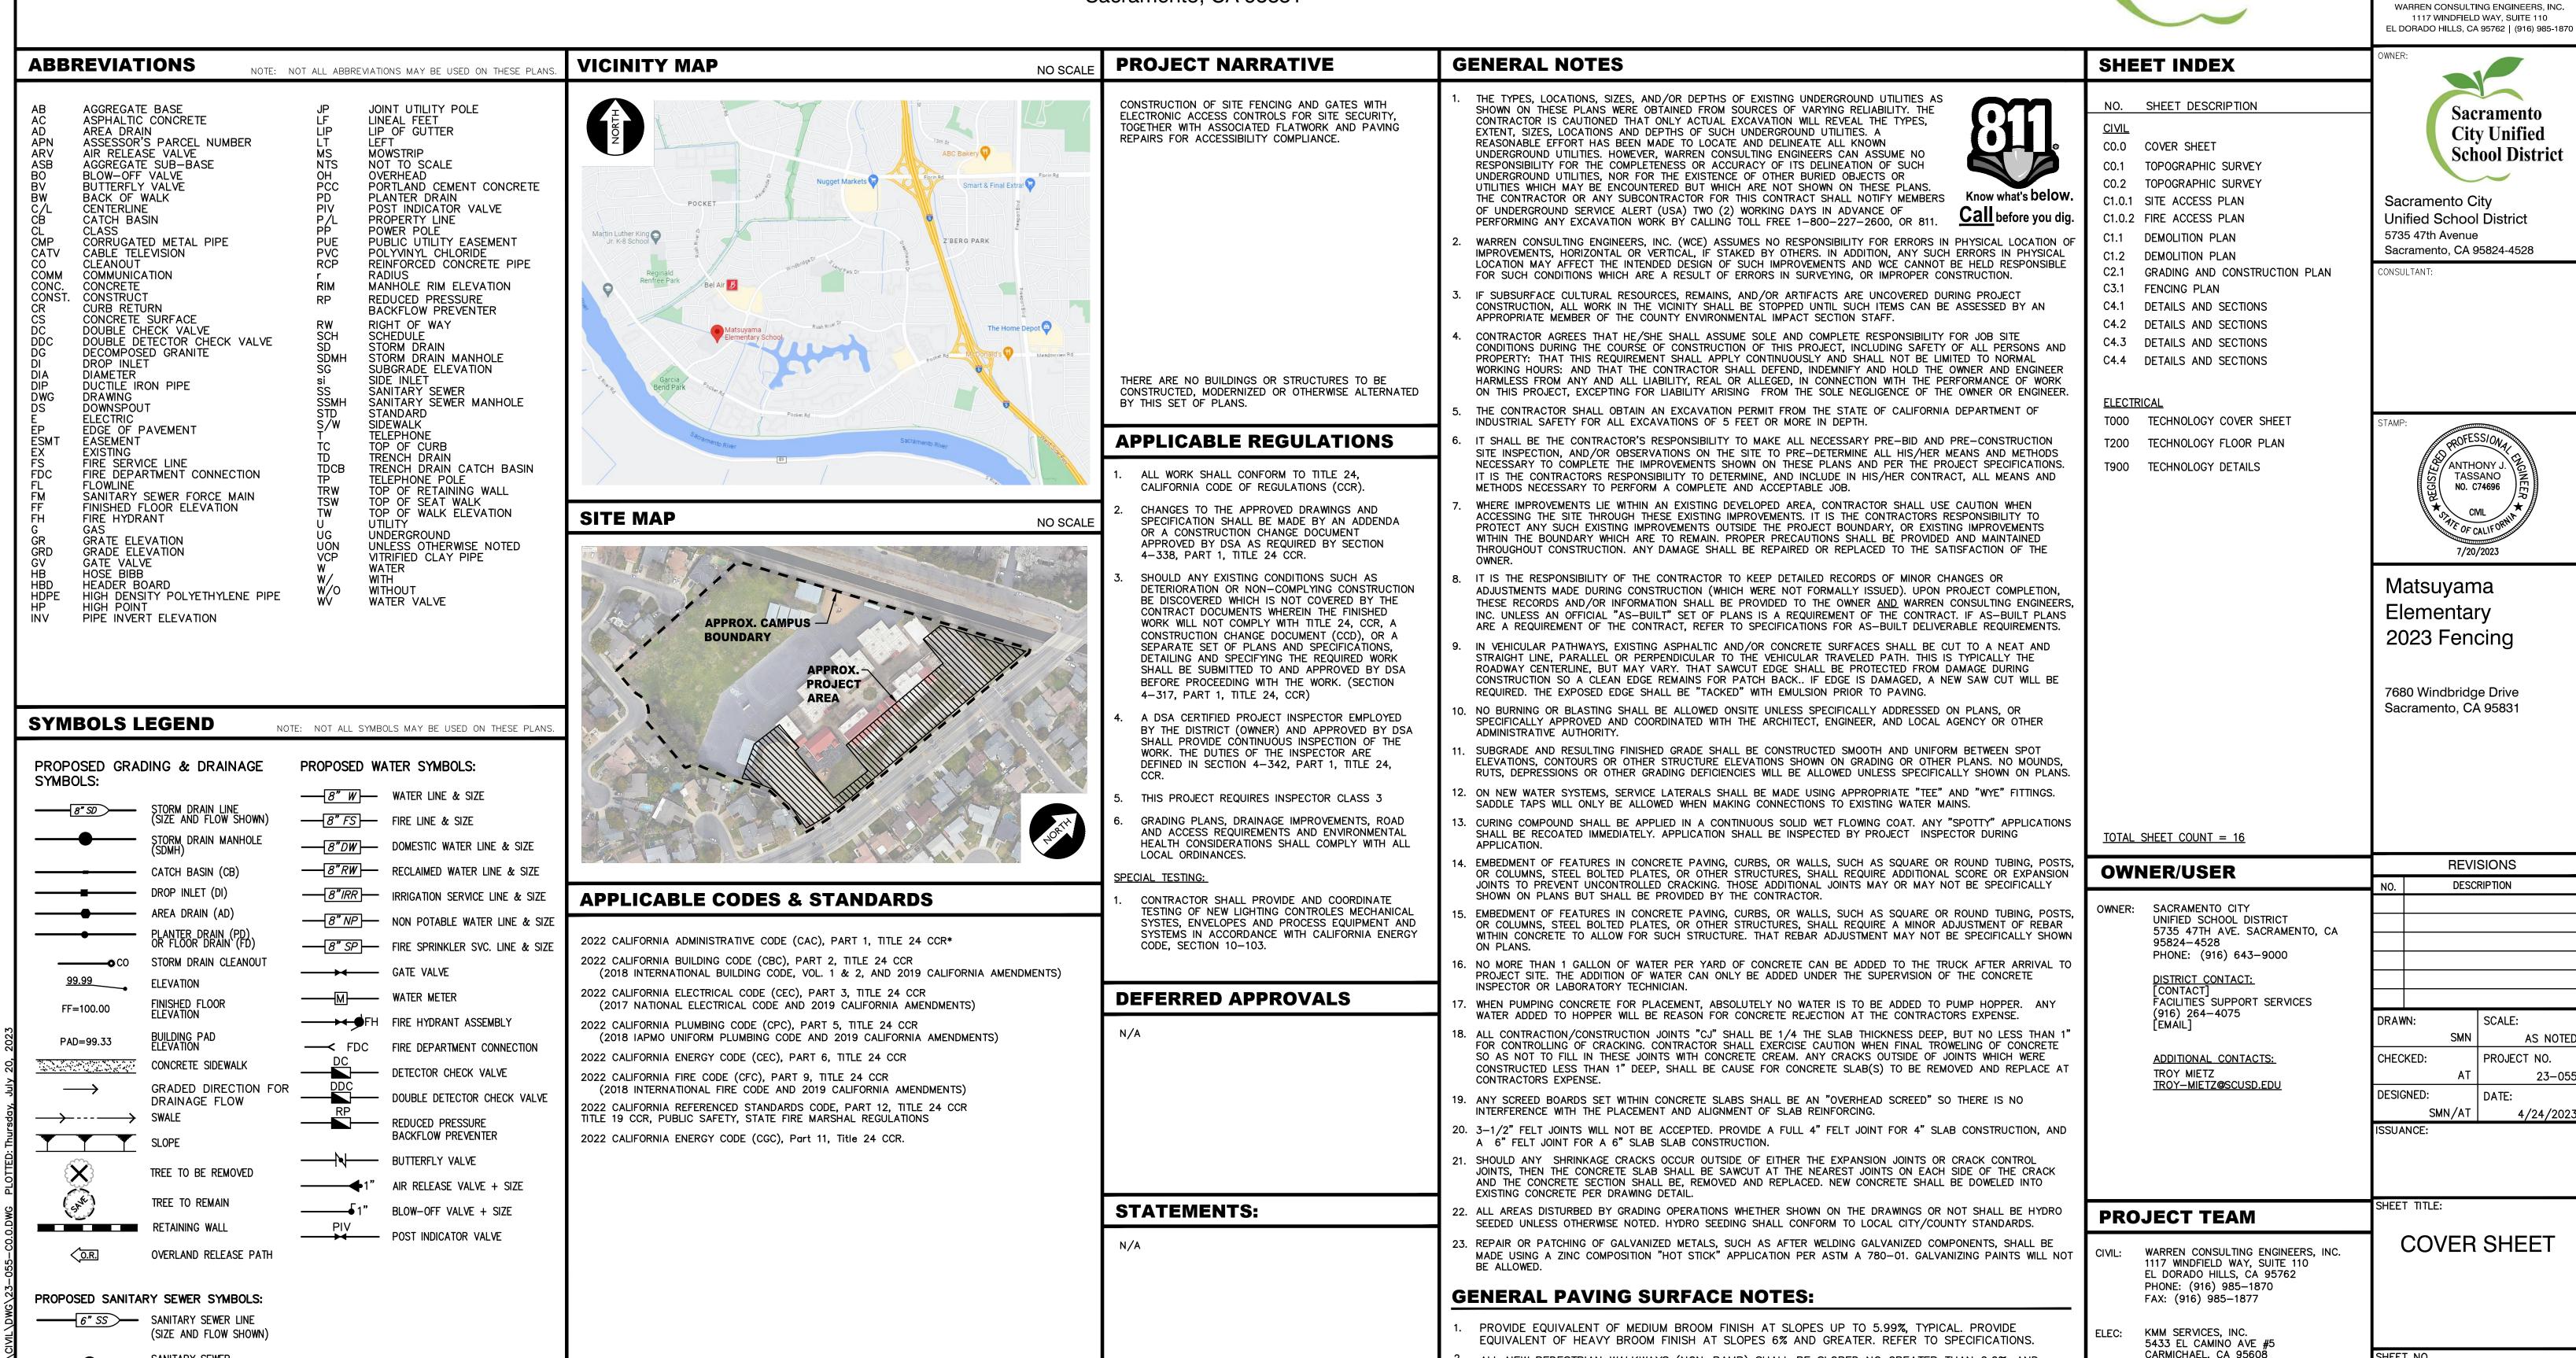

ALL NEW PEDESTRIAN WALKWAYS (NON-RAMP) SHALL BE SLOPED NO GREATER THAN 2.0%, AND

NO LESS THAN 0.75% IN ANY DIRECTION, UNLESS SPECIFICALLY LABELED OTHERWISE. ALL

CONCRETE SHALL MEET THE FOLLOWING SLOPE REQUIREMENTS:

NO GREATER THAN 2% SLOPE CROSSING THE DIRECTION OF TRAVEL.

NO GREATER THAN 2% SLOPE IN ANY DIRECTION IN COURTYARD OR PLAZA AREAS.


- NO GREATER THAN 5% SLOPE IN THE DIRECTION OF TRAVEL.

SANITARY SEWER

MANHOLE (SSMH)

SEWER CLEANOU?

FLUSHER BRANCH

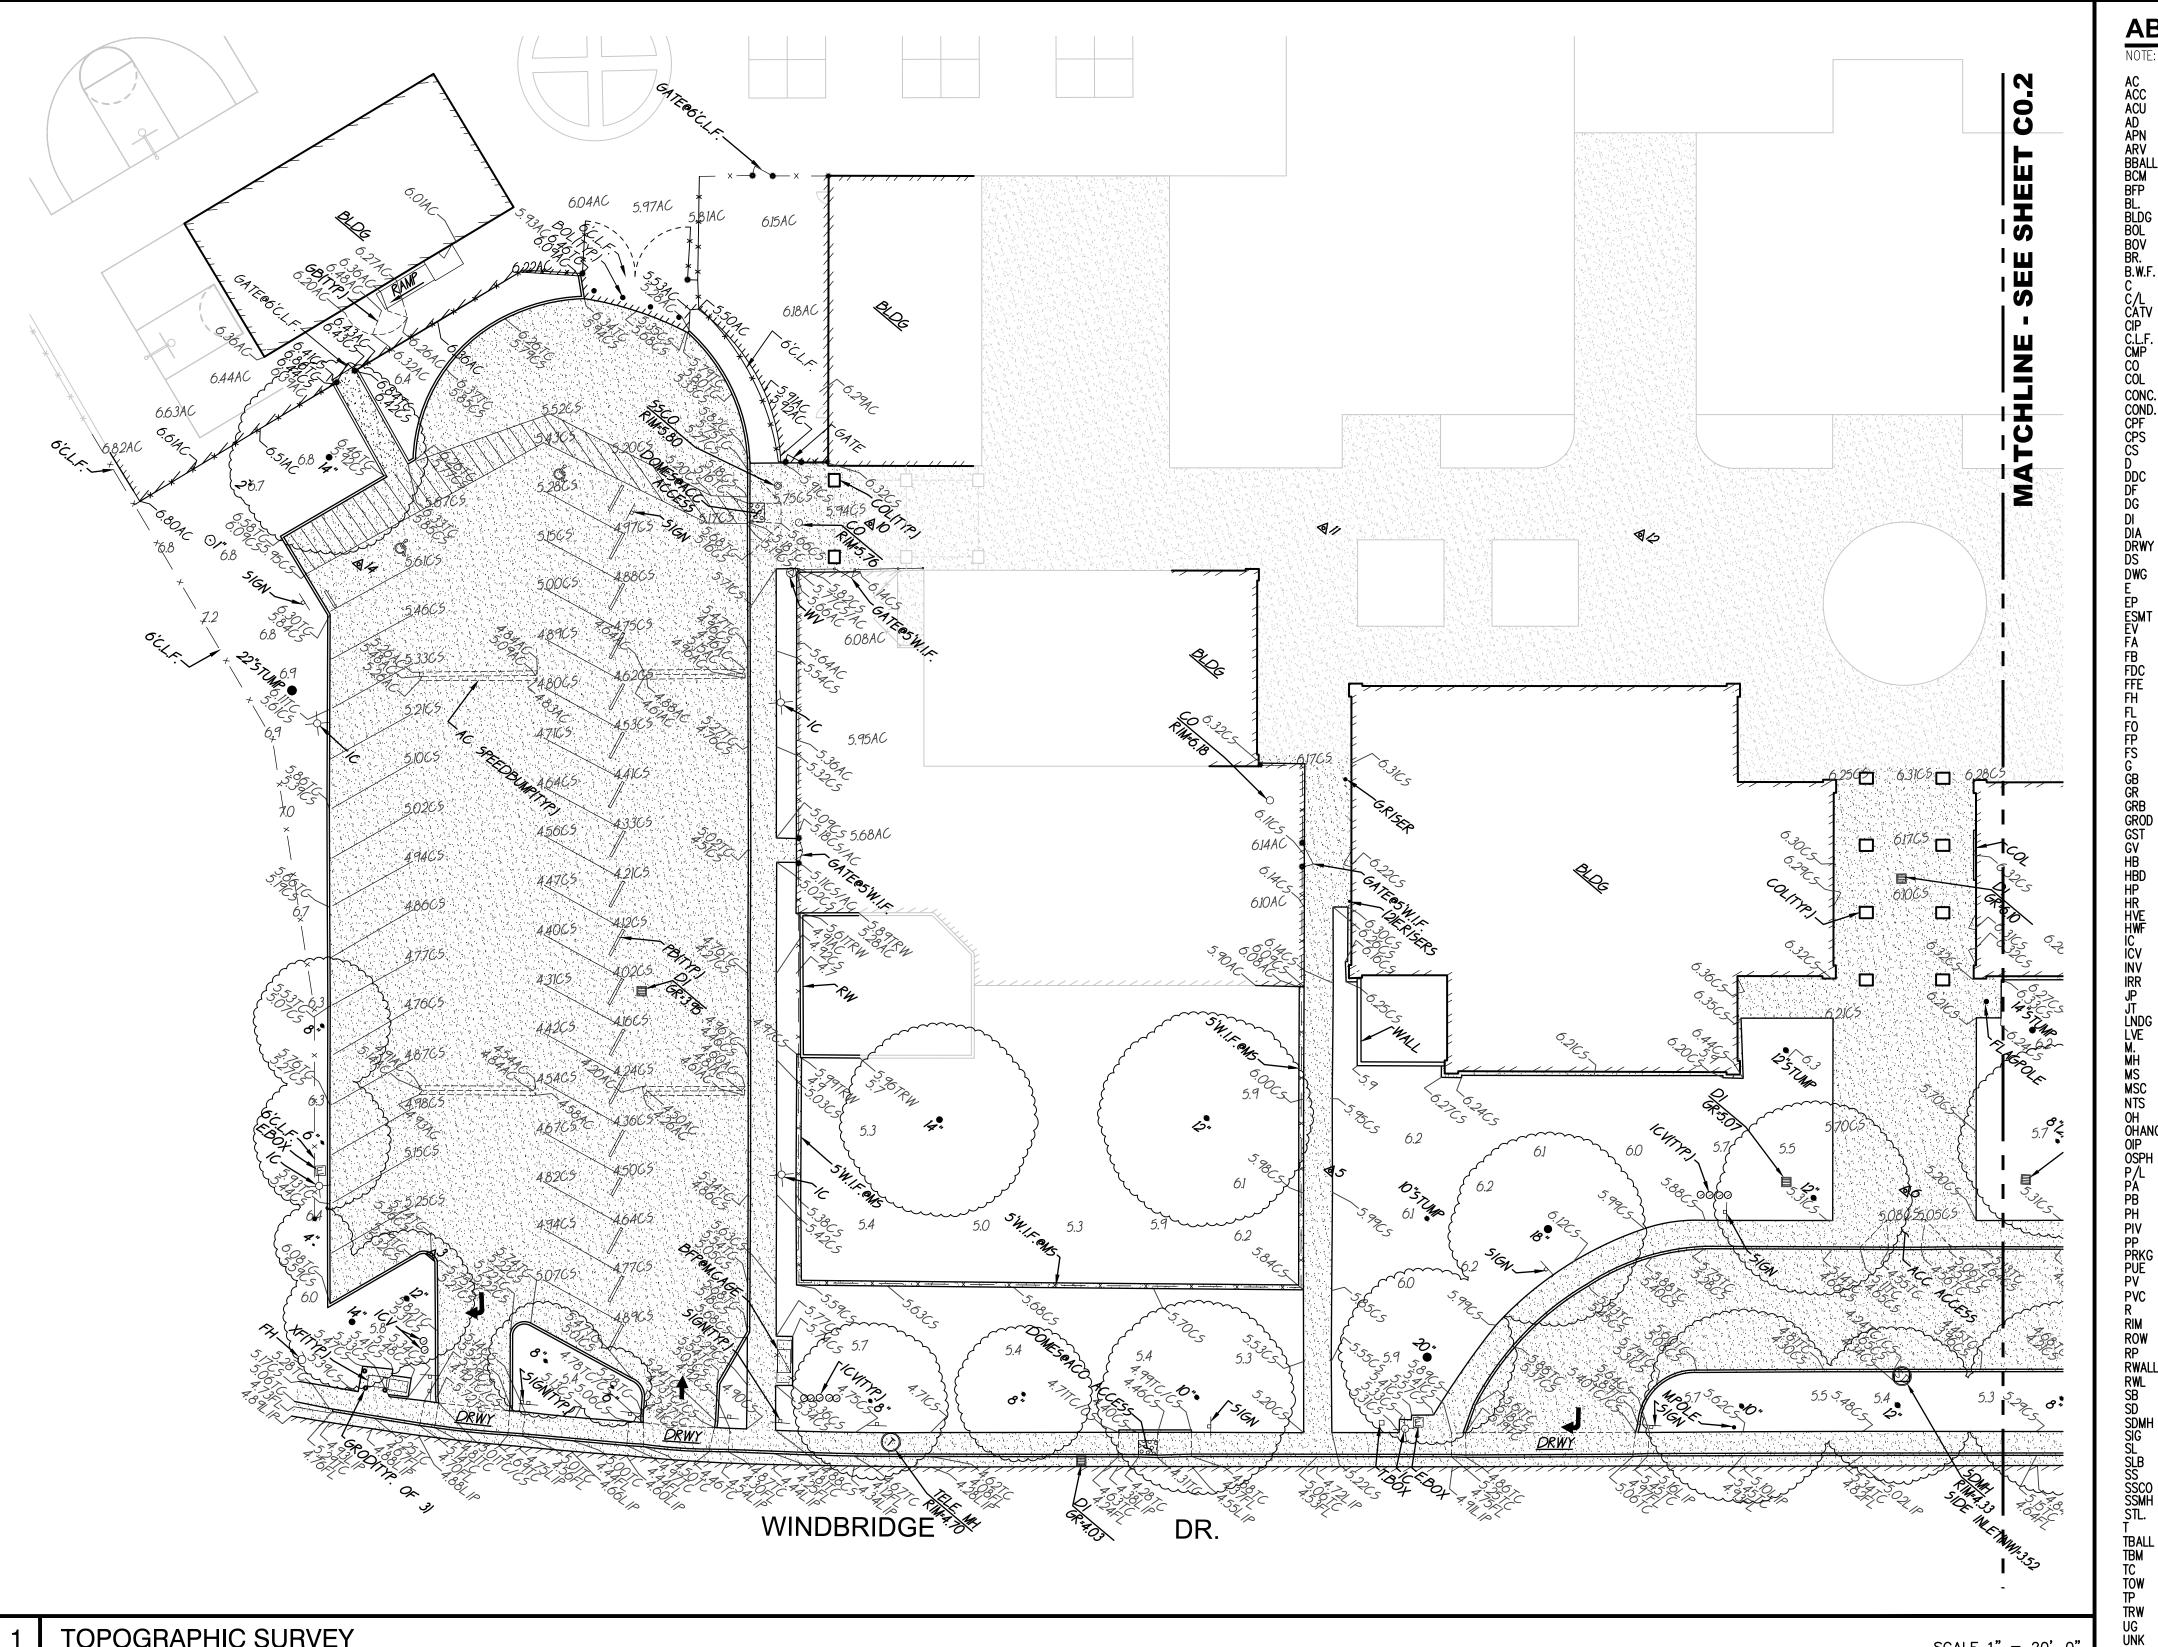


TOPOGRAPHIC SURVEY SCALE 1" = 20'-0"

A.P.N.		031-1150-001	
BENCHMARK NO		336-H3C	ELEV. <u>4.664</u>

HILTI NAIL IN LIGHT BASE WEST SIDE OF RUSH RIVER DRIVE 16' SOUTH OF THE DRIVEWAY & 222' NORTHERLY OF THE INTERSECTION OF RUSH RIVER DRIVE AND WINDBRIDGE DRIVE

<u>NO.</u>	DESCRIPTION	NORTH	EAST	ELEV
1	CHISELED "+"	10294.42	9918.55	4.53
2	CHISELED "+"	9961.20	9500.50	4.73
3	CHISELED "+"	10024.98	9416.25	5.74
4	CPF PK CL BC	10030.78	9538.41	5.14
5	CHISELED "+"	10158.68	9548.43	6.00
6	CHISELED "+"	10232.53	9642.92	5.36
7	CPF PK CL INTX	10307.60	9868.20	5.36
8	CHISELED "+"	10478.49	9735.19	5.73
9	CHISELED "+"	10788.00	10365.51	4.84
10	CHISELED "+"	10200.38	9388.46	6.00
11	CHISELED "+"	10260.40	9461.32	6.13
12	CHISELED "+"	10301.73	9512.78	5.83
13	CHISELED "+"	10371.20	9600.41	5.87
14	CHISELED "+"	10125.41	9312.19	5.98
15	CPF BM EL=4.66	11466.91	10499.40	4.66

TBM LIST

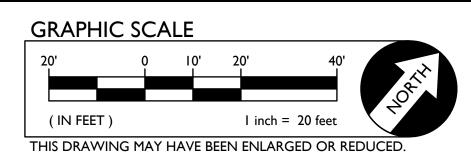

BASIS OF BEARINGS: **ASSUMED**

NOTE: EXISTING UTILITIES BASED ON VISIBLE SURFACE STRUCTURES ONLY.

SCREENED PORTIONS OF THIS PLAN ARE FROM RECORD SURVEY INFORMATION AND ARE NOT PART OF THE FIELD SURVEY PERFORMED AS PART OF THIS PROJECT. ACTUAL SITE CONDITIONS MAY VARY IN THESE AREAS DUE TO AGE.

ABBREVIATIONS NOTE: NOT ALL ABBREVIATIONS MAY BE USED ON THESE PLANS ASPHALTIC CONCRETE ACCESSIBLE AIR CONDITIONING UNIT AREA DRAIN ASSESSOR'S PARCEL NUMBER AIR RELEASE VALVE BASKETBALL POLE BRASS CAP MONUMENT BACK FLOW PREVENTER BUILDING BOLLARD

BLOW-OFF VALVE BARBED WIRE FENCE COMMUNICATION CENTERLINE CABLE TELEVISION CAPPED IRON PIPE CHAIN LINK FENCE CORRUGATED METAL PIPE CLEANOUT COLUMN CONCRETE CONDENSATE CONTROL POINT FOUND CONTROL POINT SET CONCRETE SURFACE

DOUBLE DETECTOR CHECK VALVE DRINKING FOUNTAIN DECOMPOSED GRANITE DIAMETER DRIVEWAY DOWNSPOUT DRAWING

ELECTRIC EDGE OF PAVEMENT EASEMENT ELECTRICAL VAULT FIRE ALARM FIRE BOX FIRE DEPARTMENT CONNECTION FINISHED FLOOR ELEVATION FIRE HYDRANT

FIBER OPTIC GAS GRADE BREAK GROUND ROD BOX GATE STOP

GAS VALVE HOSE BIBB HEADER BOARD HIGH PRESSURE HANDRAIL HIGH VOLTAGE ELECTRIC HOG WIRE FENCE IN CONCRETE
IRRIGATION CONTROL VALVE

PIPE INVERT ELEVATION IRRIGATION JOINT UTILITY POLE JOINT TRENCH LANDING LOW VOLTAGE ELECTRIC

METAL MANHOLE MOW STRIP METAL STORAGE CONTAINER NOT TO SCALE OVERHEAD

OPEN IRON PIPE OLD STEEL POST HOLE PROPERTY LINE PLANTER AREA PARKING BUMPER POSTHOLE POST INDICATOR VALVE POWER POLE

PUBLIC UTILITY EASEMENT **PAVERS** POLYVINYL CHLORIDE RUBBER MANHOLE RIM ELEVATION

RIGHT OF WAY REDUCED PRESSURE BACKFLOW ASBLY. RETAINING WALL RAIN WATER LEADER SIGNAL BOX STORM DRAIN STORM DRAIN MANHOLE

SIGNAL STREET LIGHT STREET LIGHT BOX SANITARY SEWER SANITARY SEWER CLEANOUT SANITARY SEWER MANHOLE STEEL TELEPHONE TETHER BALL POLE TEMPORARY BENCHMARK

TOP OF CURB TELEPHONE POLE TOP OF RETAINING WALL UNDERGROUND UNKNOWN VENT WATER

WITHOUT

WROUGHT IRON FENCE WOOD RAIL FENCE TRANSFORMER CROSSWALK

EXISTING TOPOGRAPHY

— - - — = PROPERTY LINE ----- = CENTERLINE = PROPERTY CORNER FOUND AS NOTED = PROPERTY CORNER NOTHING FOUND OR SET = TEMPORARY BENCHMARK (SEE TBM LIST FOR INFO) = SWALE OR DRAINAGE FLOW = DRAINAGE FLOW = FENCE (TYPE NOTED)

= TREE (SIZE/TYPE INDICATED) = SLOPE = CONTOUR = CONCRETE SURFACE = EDGE OF ASPHALT = EDGE OF BUILDING

= SIGN = POST OR BOLLARD

99.9 = GROUND ELEVATION = HARD SURFACE ELEVATION

EXISTING UTILITIES

= storm drain line (size & direction of flow) _____12"SD__ = storm drain line (record information) $\underline{}$ 12"SD $\underline{}$ = storm drain line (UNDERGROUND LOCATING) = storm drain manhole

= storm drain cleanout = drop inlet

= AREA DRAIN

= RAIN WATER LEADER = downspout

= sanitary sewer line (size & direction of flow) _____12"SS _ = sanitary sewer line (record information)

= sanitary sewer line (UNDERGROUND LOCATING) = sanitary sewer manhole

= sanitary sewer cleanout = water line (size indicated)

——— W— — = water line (UNDERGROUND LOCATING) = water manhole = water valve

= water box = IRRIGATION CONTROL VALVE

= water meter

= FIRE HYDRANT = backflow preventer = SPRINKLER

= hose bibb — OH − E— = OVERHEAD ELECTRIC LINE ----E--- = UNDERGROUND ELECTRIC LINE

---E---= UNDERGROUND ELEÇTRIC LINE (record information) — — E— — = UNDERGROUND ELECTRIC LINE (UNDERGROUND LOCATING)

= ELECTRIC MANHOLE = UTILITY POLE (WITH GUY WIRE)

= ELECTRIC METER = ELECTRIC BOX

= STREET LIGHTING BOX

 $\Box \qquad \Box \Box \Box = SIGNAL \ LIGHT$ = FLOOD LIGHT

= ELECTRICAL OUTLET

--G--=GAS LINE (UNDERGROUND LOCATING)

= GAS MANHOLE = GAS VALVE

= GAS METER = telephone line

--- \mathcal{T} --- = telephone line (record information) = telephone line (UNDERGROUND LOCATING)

= TRAFFIC SIGNAL BOX


= STORM DRAIN BOX





Sacramento City **Unified School District** 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

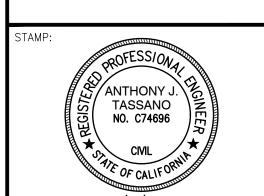

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

	REVISIONS
0.	DESCRIPTION

ORAWN:	SCALE:	
SMN	AS NOTED	
CHECKED:	PROJECT NO.	
AT	23-055	
DESIGNED:	DATE:	
SMN/AT	4/24/2023	


ISSUANCE:

SHEET TITLE:

TOPOGRAPHIC SURVEY

SHEET NO.

C0.1

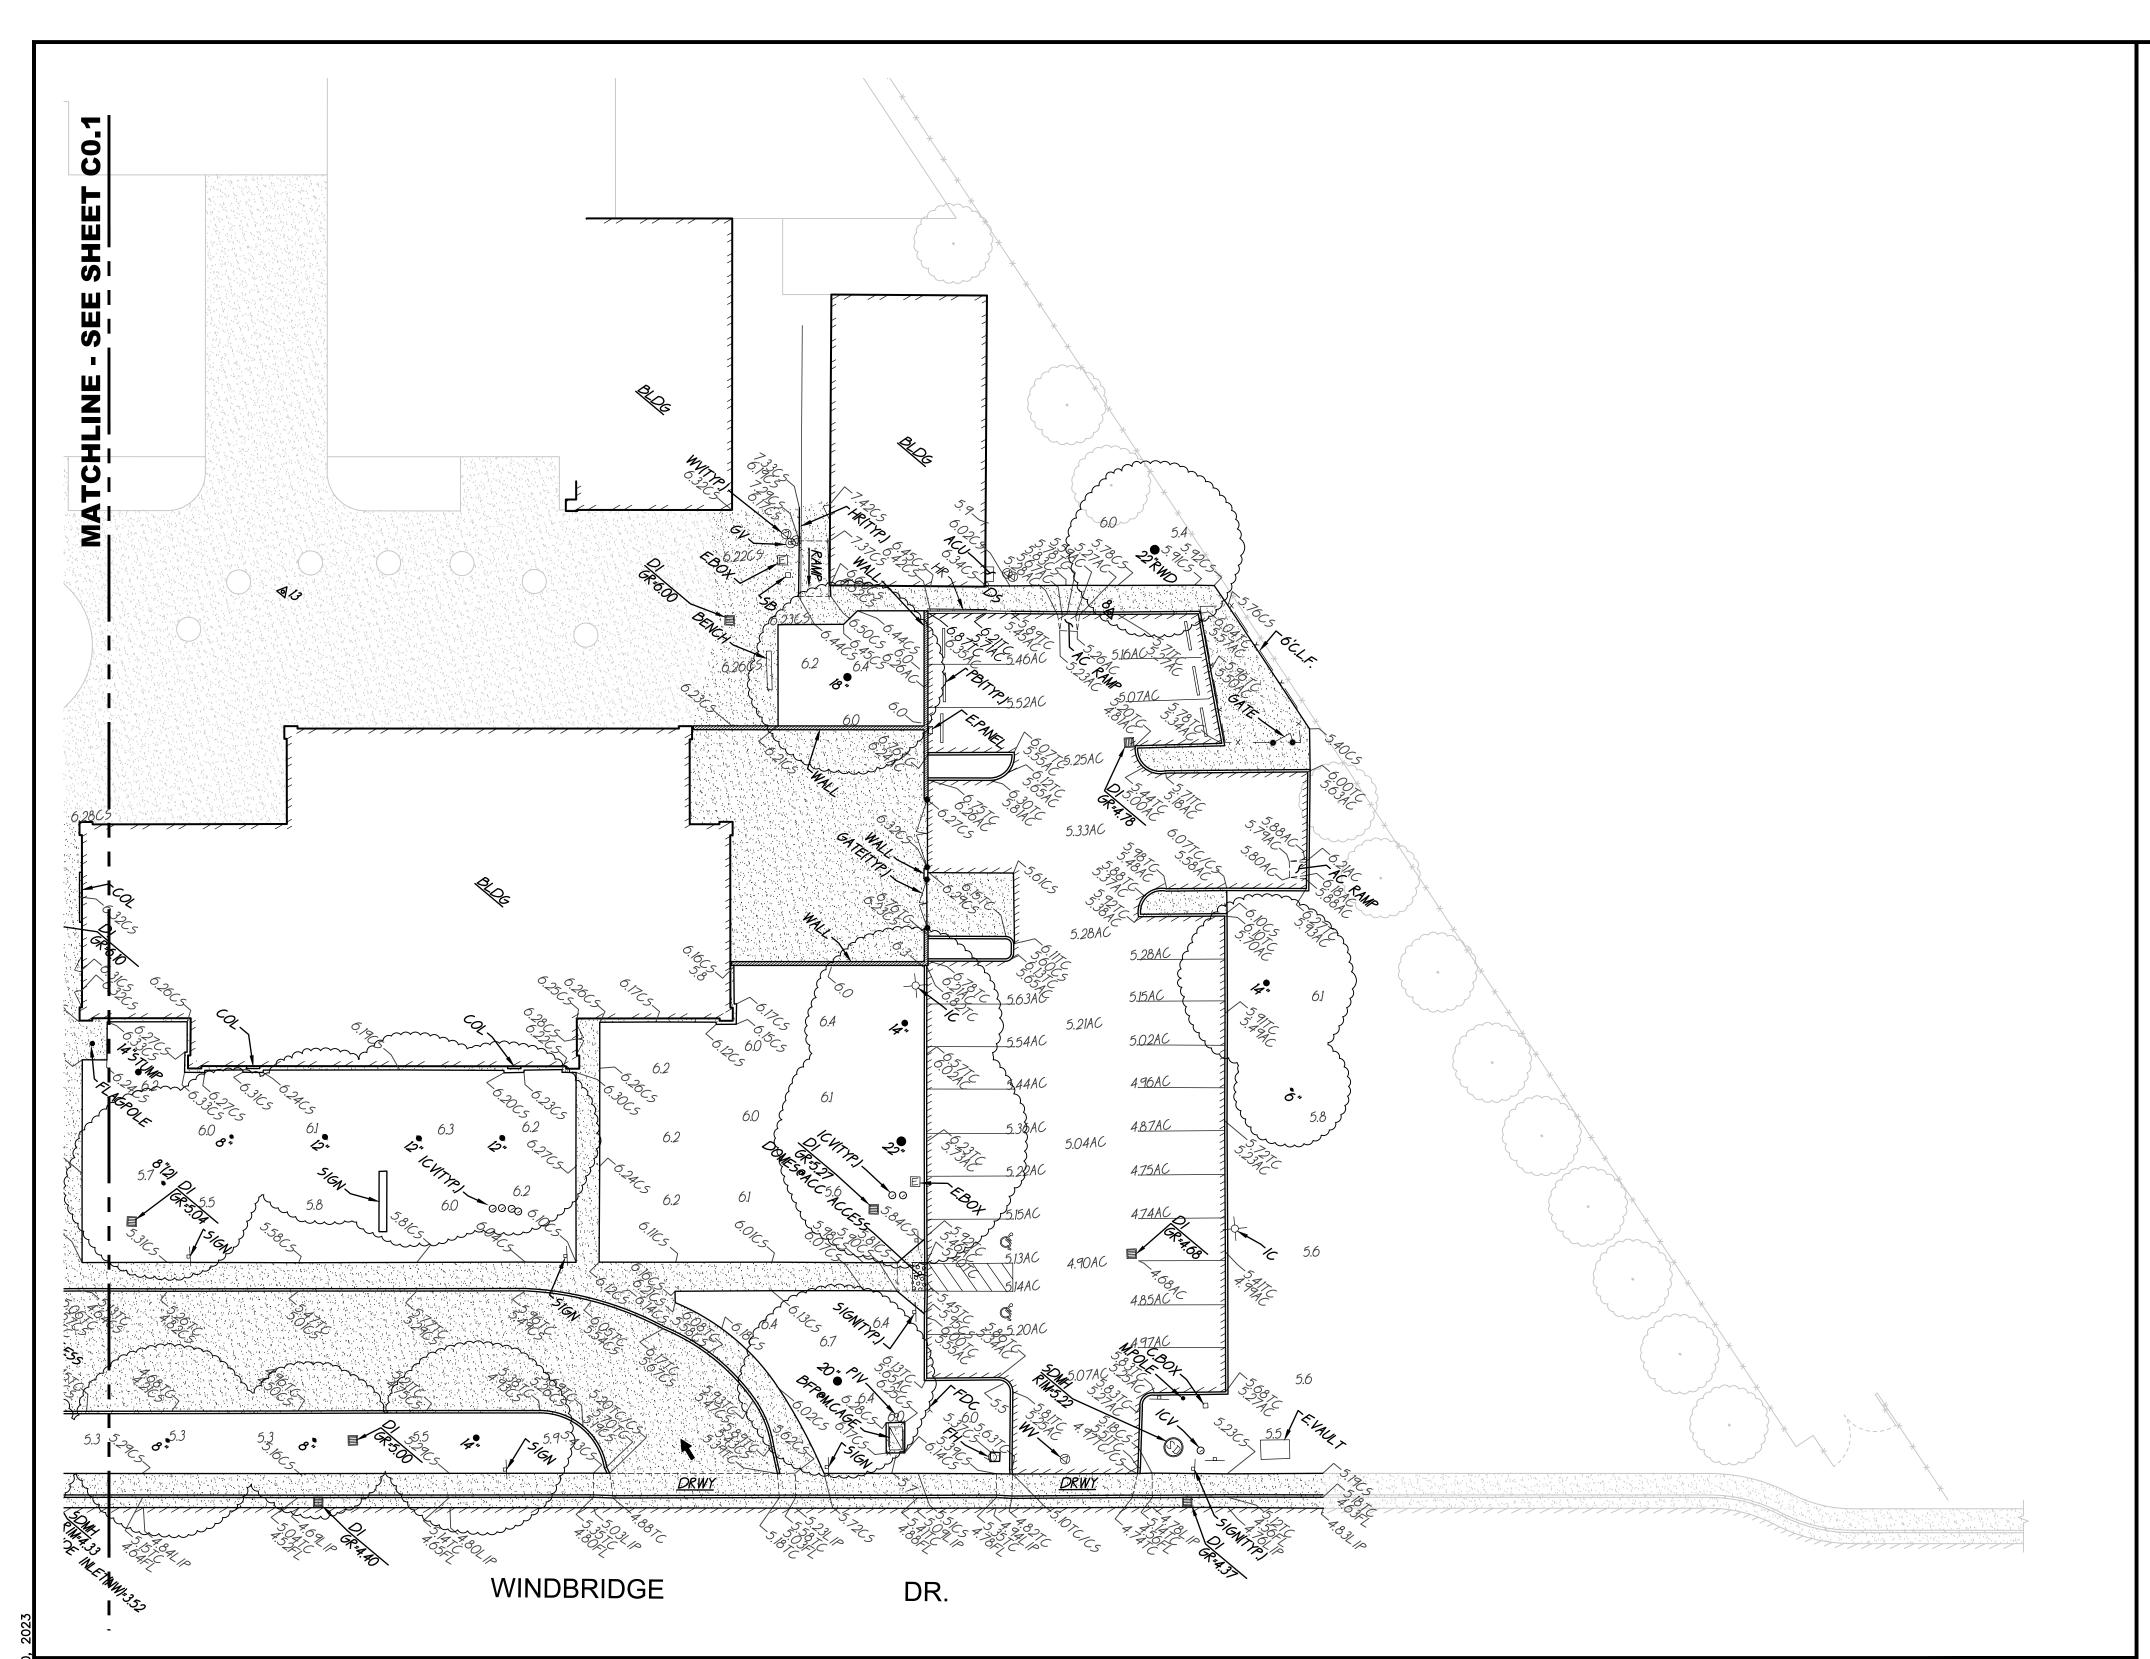

TOPOGRAPHIC SURVEY SCALE 1" = 20'-0"

> A.P.N. 031-1150-001 BENCHMARK NO. 336-H3C ELEV. <u>4.664</u>

HILTI NAIL IN LIGHT BASE WEST SIDE OF RUSH RIVER DRIVE 16' SOUTH OF THE DRIVEWAY & 222' NORTHERLY OF THE INTERSECTION OF RUSH RIVER DRIVE AND WINDBRIDGE DRIVE

1	CHISELED "+"	10294.42	9918.55	4.53
2	CHISELED "+"	9961.20	9500.50	4.73
3	CHISELED "+"	10024.98	9416.25	5.74
4	CPF PK CL BC	10030.78	9538.41	5.14
5	CHISELED "+"	10158.68	9548.43	6.00
6	CHISELED "+"	10232.53	9642.92	5.36
7	CPF PK CL INTX	10307.60	9868.20	5.36
8	CHISELED "+"	10478.49	9735.19	5.73
9	CHISELED "+"	10788.00	10365.51	4.84
10	CHISELED "+"	10200.38	9388.46	6.00
11	CHISELED "+"	10260.40	9461.32	6.13
12	CHISELED "+"	10301.73	9512.78	5.83
13	CHISELED "+"	10371.20	9600.41	5.87
14	CHISELED "+"	10125.41	9312.19	5.98
15	CPF BM EL=4.66	11466.91	10499.40	4.66


NORTH EAST

ELEV

TBM LIST

NO. DESCRIPTION

GRAPHIC SCALE

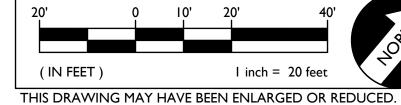

BASIS OF BEARINGS: **ASSUMED**

NOTE: EXISTING UTILITIES BASED ON VISIBLE SURFACE STRUCTURES ONLY.

SCREENED PORTIONS OF THIS PLAN ARE FROM RECORD SURVEY INFORMATION AND ARE NOT PART OF THE FIELD SURVEY PERFORMED AS PART OF THIS PROJECT. ACTUAL SITE CONDITIONS MAY VARY IN THESE AREAS DUE TO AGE.

ABBREVIATIONS

NOTE: NOT ALL ABBREVIATIONS MAY BE USED ON THESE PLANS. ASPHALTIC CONCRETE ACCESSIBLE AIR CONDITIONING UNIT AREA DRAIN ASSESSOR'S PARCEL NUMBER AIR RELEASE VALVE BASKETBALL POLE BRASS CAP MONUMENT BACK FLOW PREVENTER BUILDING BOLLARD BLOW-OFF VALVE BARBED WIRE FENCE COMMUNICATION CABLE TELEVISION

CAPPED IRON PIPE CHAIN LINK FENCE CORRUGATED METAL PIPE CLEANOUT COLUMN CONCRETE CONDENSATE CONTROL POINT FOUND CONTROL POINT SET CONCRETE SURFACE

DOUBLE DETECTOR CHECK VALVE DRINKING FOUNTAIN DECOMPOSED GRANITE DIAMETER DRIVEWAY DOWNSPOUT DRAWING

ELECTRIC EDGE OF PAVEMENT EASEMENT ELECTRICAL VAULT FIRE ALARM FIRE BOX FIRE DEPARTMENT CONNECTION FINISHED FLOOR ELEVATION FIRE HYDRANT

GAS GRADE BREAK GROUND ROD BOX GROUND ROD GATE STOP

GAS VALVE HEADER BOARD HIGH PRESSURE HANDRAIL IN CONCRETE IRRIGATION CONTROL VALVE

PIPE INVERT ELEVATION IRRIGATION JOINT UTILITY POLE JOINT TRENCH LOW VOLTAGE ELECTRIC

METAL MANHOLE MOW STRIP METAL STORAGE CONTAINER NOT TO SCALE

OVERHEAD OPEN IRON PIPE OLD STEEL POST HOLE PROPERTY LINE PLANTER AREA PARKING BUMPER POSTHOLE POST INDICATOR VALVE

POWER POLE PUBLIC UTILITY EASEMENT **PAVERS** POLYVINYL CHLORIDE RUBBER

MANHOLE RIM ELEVATION RIGHT OF WAY REDUCED PRESSURE BACKFLOW ASBLY. RETAINING WALL RAIN WATER LEADER SIGNAL BOX STORM DRAIN

RWALL

STORM DRAIN MANHOLE SIGNAL STREET LIGHT STREET LIGHT BOX SANITARY SEWER SANITARY SEWER CLEANOUT SANITARY SEWER MANHOLE STEEL TELEPHONE

TETHER BALL POLE TEMPORARY BENCHMARK TOP OF CURB TELEPHONE POLE TOP OF RETAINING WALL UNDERGROUND UNKNOWN

VENT

WATER

WITHOUT WROUGHT IRON FENCE WOOD RAIL FENCE TRANSFORMER CROSSWALK

EXISTING TOPOGRAPHY

— - - — = PROPERTY LINE ----- = CENTERLINE = PROPERTY CORNER FOUND AS NOTED = PROPERTY CORNER NOTHING FOUND OR SET = TEMPORARY BENCHMARK (SEE TBM LIST FOR INFO) = SWALE OR DRAINAGE FLOW = DRAINAGE FLOW = FENCE (TYPE NOTED)

= TREE (SIZE/TYPE INDICATED) = SLOPE = CONTOUR = CONCRETE SURFACE = EDGE OF ASPHALT

= EDGE OF BUILDING = SIGN = POST OR BOLLARD

99.9 = GROUND ELEVATION = HARD SURFACE ELEVATION

EXISTING UTILITIES

= storm drain line (size & direction of flow) _____12"SD__ = storm drain line (record information) _______1<u>2"SD</u> ___ = sţorm_drain_line (UNDERGROUND LOCATING) = storm drain manhole = storm drain cleanout

= drop inlet = AREA DRAIN

= RAIN WATER LEADER = downspout

= sanitary sewer line (size & direction of flow) _____<u>12"SS</u> _ = sanitary sewer line (record information)

= sanitary sewer line (UNDERGROUND LOCATING) = sanitary sewer manhole

= sanitary sewer cleanout = water line (size indicated) = water line (record information)

———— W— — = water line (UNDERGROUND LOCATING) = water manhole = water valve

= water meter = water box = IRRIGATION CONTROL VALVE = FIRE HYDRANT

= backflow preventer = SPRINKLER = hose bibb — OH - E— = OVERHEAD ELECTRIC LINE

----E--- = UNDERGROUND ELECTRIC LINE ---E---= UNDERGROUND ELEÇTRIC LINE (record information)

— — E— — = UNDERGROUND ELECTRIC LINE (UNDERGROUND LOCATING) = ELECTRIC MANHOLE = UTILITY POLE (WITH GUY WIRE)

= ELECTRIC METER = ELECTRIC BOX

= STREET LIGHTING BOX \Box = SIGNAL LIGHT

= FLOOD LIGHT = ELECTRICAL OUTLET

---G---=GAS LINE (record information)

--G--=GAS LINE (UNDERGROUND LOCATING) = GAS MANHOLE = GAS VALVE

= GAS METER = telephone line

--- \mathcal{T} --- = telephone line (record information) — — T — = telephone line (UNDERGROUND LOCATING)

= TRAFFIC SIGNAL BOX

= STORM DRAIN BOX


C0.2





Sacramento City **Unified School District** 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

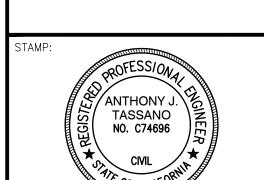

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS
DESCRIPTION

DRAWN:	SCALE:
SMN	AS NOTED
CHECKED:	PROJECT NO.
AT	23-055
DESIGNED:	DATE:
SMN/AT	4/24/2023


ISSUANCE:

SHEET TITLE: **TOPOGRAPHIC** SURVEY

SHEET NO.





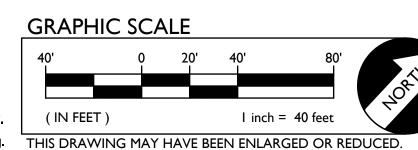

SITE ACCESS PLAN

LOT A PARKING CALCULATION

PARKING LOT A PARKING TOTALS	EXISTING	PROPOSED
STANDARD PARKING STALLS ACCESSIBLE PARKING SPACES	31 2	31 2
OVERALL TOTAL PARKING SPACES	33	33
(E) ACCESSIBLE SPACE REQUIREMENTS	REQUIRED	PROVIDED
REQUIRED ACCESSIBLE SPACES (CAR) REQUIRED ACCESSIBLE SPACES (VAN)	1 1	1 1
TOTAL REQUIRED ACCESSIBLE SPACES (PER 2019 CBC SECTION 11B-208.2)	2	2

LOT B PARKING CALCULATION

PARKING LOT A PARKING TOTALS	EXISTING	PROPOSED
STANDARD PARKING STALLS ACCESSIBLE PARKING SPACES	26 2	26 2
OVERALL TOTAL PARKING SPACES	26	26
(E) ACCESSIBLE SPACE REQUIREMENTS	REQUIRED	PROVIDED
REQUIRED ACCESSIBLE SPACES (CAR)	1	1
REQUIRED ACCESSIBLE SPACES (VAN)	1	1
TOTAL REQUIRED ACCESSIBLE SPACES (PER 2019 CBC SECTION 11B-208.2)	2	2

FENCEING ONLY PROJECT ACCESSIBLE PATH OF TRAVEL

IN ACCORDANCE WITH DSA IR A-22, ITEM NO. 12, KEYNOTE 4, THE ACCESSIBLE PATH OF TRAVEL REVIEW SHALL BE LIMITED TO WHERE NEW FENCES AND GATES AFFECT/CROSS AN ACCESSIBLE PATH OF TRAVEL.

ACCESSIBLE PATH OF TRAVEL (P.O.T.)

TO THE BEST OF THE KNOWLEDGE OF THE ARCHITECT AND/OR ENGINEER, OR THE DISTRICT, THE PATH OF TRAVEL (P.O.T.) AS INDICATED, IS A BARRIER FREE ACCESS ROUTE CONFORMING TO THE FOLLOWING:

- 1. THERE ARE NO ABRUPT LEVEL CHANGES EXCEEDING 1/2" IF BEVELED AT 1V:2H MAX SLOPE, OR VERTICAL LEVEL CHANGES NOT EXCEEDING
- 2. THE MINIMUM WIDTH OF THE P.O.T. IS 48" AT ANY GIVEN POINT. (11B-403.5.1)
- 3. THE SURFACE OF THE P.O.T. STABLE, FIRM, AND SLIP RESISTANT. (11B-403.2)
- 4. THE MAXIMUM SLOPE IN THE DIRECTION OF TRAVEL IS 5.0% (11B-403.3), UNLESS OTHERWISE INDICATED, WITH THE FOLLOWING EXCEPTIONS:
- A. THE SLOPED PORTION OF "RAMP" DOES NOT EXCEED 8.33% (1V:12H) IN THE DIRECTION OF TRAVEL (11B-405.2).
- B. THE SLOPED PORTION OF A "CURB RAMP" DOES NOT EXCEED 8.33% (1V:12H) IN THE DIRECTION OF TRAVEL (11B-406.2.1 AND 11B-406.3.1).
- 5. THE CROSS SLOPE OF THE ACCESSIBLE PATH OF TRAVEL DOES NOT EXCEED 2% AT ANY GIVEN POINT (11B-403.3).
- 6. THE ACCESSIBLE PATH OF TRAVEL SHALL BE MAINTAINED FREE OF OVERHANGING OBSTRUCTIONS TO 80" MINIMUM (11B-307).
- 7. THERE ARE NO PROTRUDING OBJECTS GREATER THAN 4" PROJECTION FROM WALL AND ABOVE 27" AND LESS THAN 80" (11B-307).
- 8. PASSING SPACES AT LEAST 60"X60" ARE LOCATED NOT MORE THAT 200' APART. (11B-403.5.3)
- 9. PARTS OF P.O.T. WITH CONTINUOUS GRADIENTS HAVE 60" LEVEL AREAS NOT MORE THAN 400' APART. (11B-407.3)
- 10. THERE IS NO DROP-OFF OVER 4" AT THE EDGE OF WALK OR LANDING. (11B-303.5)
- 11. ARCHITECT AND CONTRACTOR SHALL VERIFY THAT ALL BARRIERS ON
- THE INDICATED PATH OF TRAVEL HAVE BEEN REMOVED.
- 12. THERE ARE NO GRATINGS WITHIN THE PATH OF TRAVEL WITH GRATE OPENINGS EXCEEDING 1/2" IN THE DIRECTION OF TRAVEL. (11B-302.3)

DSA PR-1501

"Design Professional in General Responsible Charge Statement:

The POT identified in these construction documents meets the requirements of the current applicable California Building Code (CBC) accessibility provisions for path of travel requirements for alterations, additions and **structural repairs**. As part of the design of this project, the POT was examined and any elements, components or portions of the POT that were determined to be noncompliant with the CBC have been identified and the corrective work necessary to bring them into compliance has been included within the scope of this project's work through details, drawings and specifications incorporated into these construction documents. Any noncompliant elements, components or portions of the POT that will not be corrected by this project based on valuation threshold limitations or a finding of unreasonable hardship are indicated in these construction documents.

During construction, if POT items within the scope of the project represented as CBC compliant are found to be nonconforming beyond reasonable construction tolerances, the items shall be brought into compliance with the CBC as a part of this project by means of a construction change document."

	EXISTING	BUILDING	NOT	MODERNIZED	BY -	THIS
	APPLICAT	ION.				

STORAGE CONTAINER / SHED

ACCESSIBLE PATH OF TRAVEL (P.O.T.) - LIMIT/END OF PATH OF TRAVEL THIS PROJECT.

- PATH OF TRAVEL CONTINUATION INTO ACCESSIBLE NEW CONCRETE WALKWAY

(SEE SHEET C2.1)

LEGEND

EXISTING CONCRETE WALKWAY (SEE SHEET C0.1-C0.2 & C2.1)

SCOPE OF PROJECT

SCALE 1'' = 40'-0''

— PROPERTY LINE ---- ROAD CENTERLINE

ST STORAGE, SHED/CONTAINER ACCESSIBLE RESTROOM (PROJECT COMPLIANCE)

1117 WINDFIELD WAY, SUITE 110 EL DORADO HILLS, CA 95762 | (916) 985-1870



Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

ANTHONY J TASSANO NO. C74696 7/20/2023

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS			
NO.	DESCRIPTION		


DRAWN:	SCALE:
SMN	AS NOTED
CHECKED:	PROJECT NO.
AT	23-055
DESIGNED:	DATE:
SMN/AT	4/24/2023
ISSUANCE:	

SHEET TITLE:

SITE ACCESS **PLAN**

SHEET NO.

C1.0.1

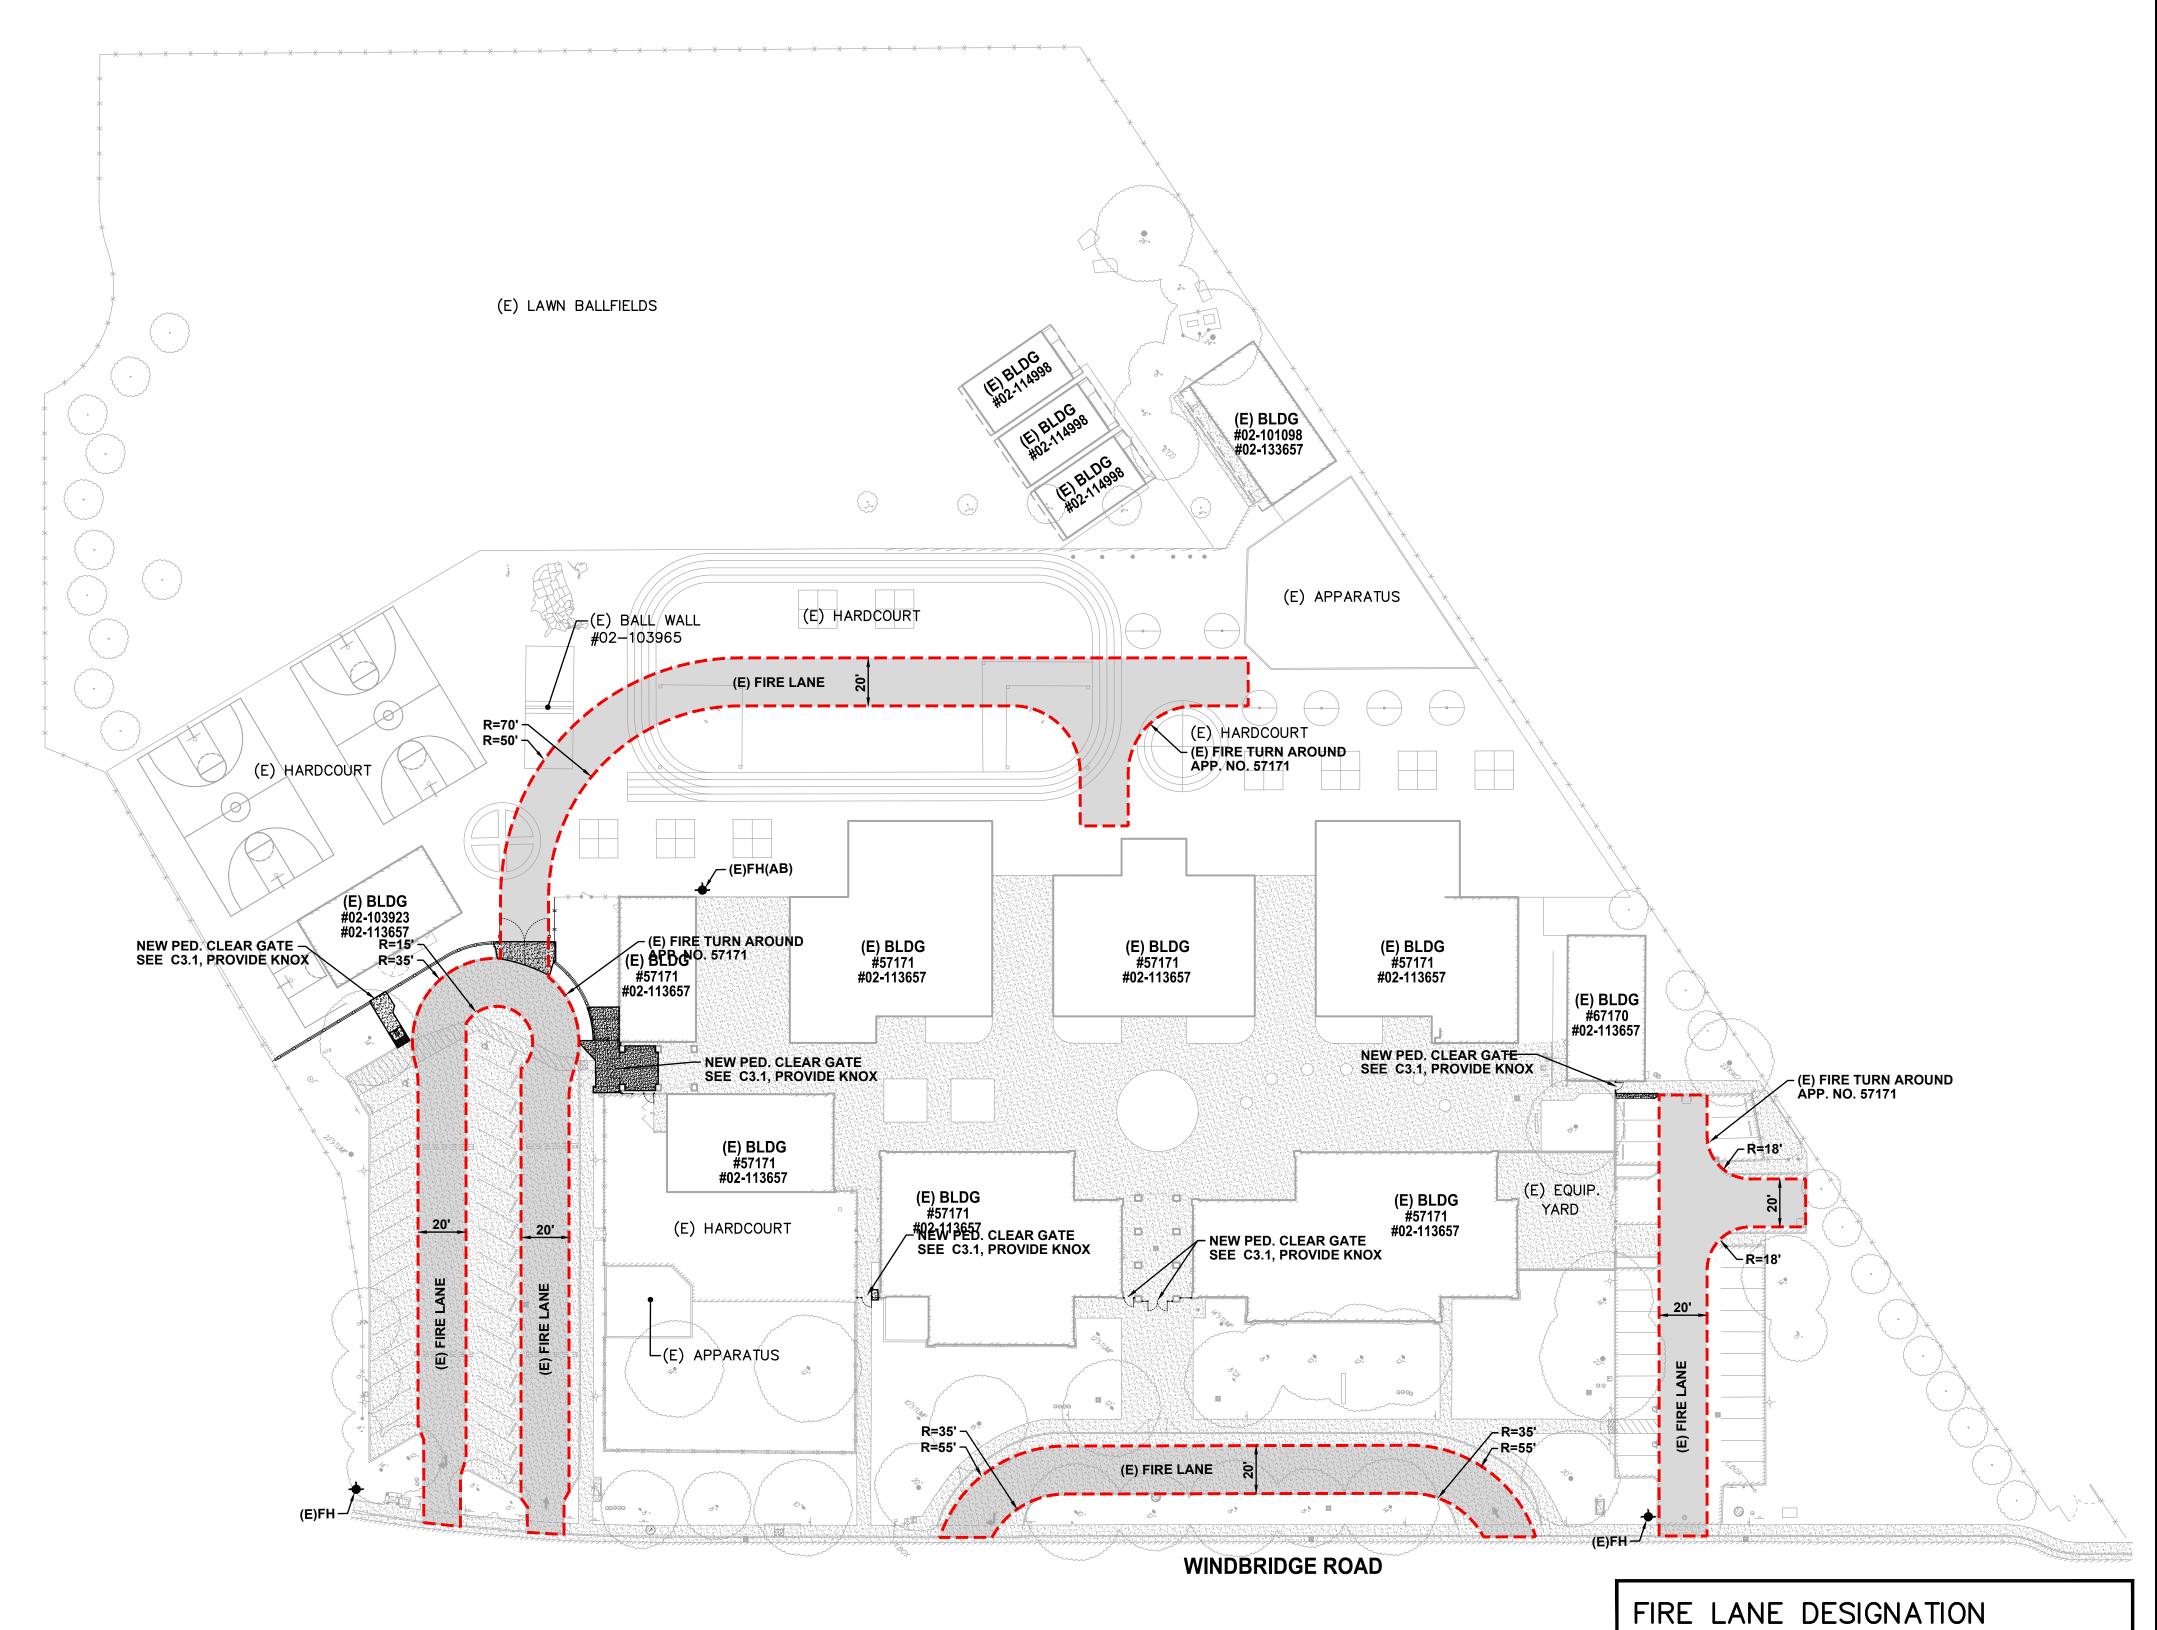

NOTE:
All new and existing fire lanes
are asphalt or concrete paved
unless otherwise stated.

GRAPHIC SCALE

THIS DRAWING MAY HAVE BEEN ENLARGED OR REDUCED.

Know what's below.

Call before you dig.

TYPICAL FIRE LANE
CLEAR WIDTH 20 FEET
CLEAR HEIGHT 13.5 FEET
INSIDE RADIUS 35 FEET MIN.
OUTSIDE RADIUS 55 FEET MIN.

KNOX NOTES

ALL GATES WHICH CROSS THE FIRE LANE AS DESIGNATED BY THIS PLAN SHALL BE OUTFITTED WITH A LOW LEVEL KNOX LOCK.

ALL FIRE CONTROL ROOMS FOR THIS PROJECT SHALL BE OUTFITTED WITH A HIGH LEVEL KNOX BOX AT A LOCATION WHICH IS APPROVED BY THE SACRAMENTO METROPOLITAN FIRE DISTRICT INSPECTOR.

PAVEMENT NOTES

FIRE ACCESS ROADWAYS SHALL BE BUILT TO BEAR A MINIMUM OF 75,000 POUNDS IN ACCORDANCE WITH CFC 2016. APPENDIX D.

ALL FIRE LANES ON THIS PLAN SHALL BE DESIGNATED IN ACCORDANCE WITH THE STRIPING PLANS, UTILIZING ONE OF THE FOLLOWING APPROVED MEANS:

- CURBS PAINT CURB TOP AND FACE RED WITH COMMERCIAL GRADE RED TRAFFIC PAINT. ON FACE OF CURB, PAINT 4" TALL WHITE LETTERING STATING "NO PARKING FIRE LANE" AT 25' O.C. CENTERED ON FACE.
- 2. PAVING PAINT 6" WIDE REP STRIPE ON PAVEMENT WITH COMMERCIAL GRADE RED TRAFFIC PAINT. CENTERED IN STRIPE, PAINT 4" TALL WHITE LETTERING STATING "NO PARKING FIRE LANE" AT 25' O.C.
- SIGNAGE POSTING OF SIGNS COMPLIANT WITH CFC 2016, APPENDIX D103.6 EVERY 50 FEET.

EXCEPTIONS:

- STREETS 20' WIDE TO 26' WIDE SHALL BE MARKED ON BOTH SIDES AS STATED ABOVE.
- STREETS GREATER THAN 26' WIDE NEED ONLY MARKING ON ONE SIDE AS STATED ABOVE.
- EDGES OF FIRE LANES AT PARKING DO NOT REQUIRE DESIGNATION.

SEE STRIPING PLAN FOR ACTUAL REQUIRED STRIPING.

ADSA

an alternate design means is being requested.

810

FIRE & LIFE SAFETY SITE CONDITIONS SUBMITTAL

Division of the State Architect (DSA) documents referenced within this publication are available on the

DSA Forms or DSA Publications webpages.


To facilitate the Division of the State Architect's (DSA) fire and life safety plan review of project site conditions, DSA requires the design professional to provide the following information at time of project submittal for projects

for site alternate design means for fire department emergency vehicle access, and fire suppression water supply. Information associated with compliance items 1 through 3 below is to be provided for all project types indicated above. Information associated with items 4 through 7 is to be completed when an alternate means is utilized. Acknowledgement by the school district and signature from the Local Fire Authority (LFA) is only required when

consisting of construction of a new campus, construction of new building(s), additions to existing buildings, and

The Project Information and Fire & Life Safety Information sections are to be completed for all projects and imaged onto the fire access site plan. When an alternate design/means is proposed, all sections on pages 1 and 2 are to be completed and imaged on the fire access site plan.

For additional information refer to the instructions at the end of this form and DSA Policy *PL 09-01: Fire Flow for Buildings*.

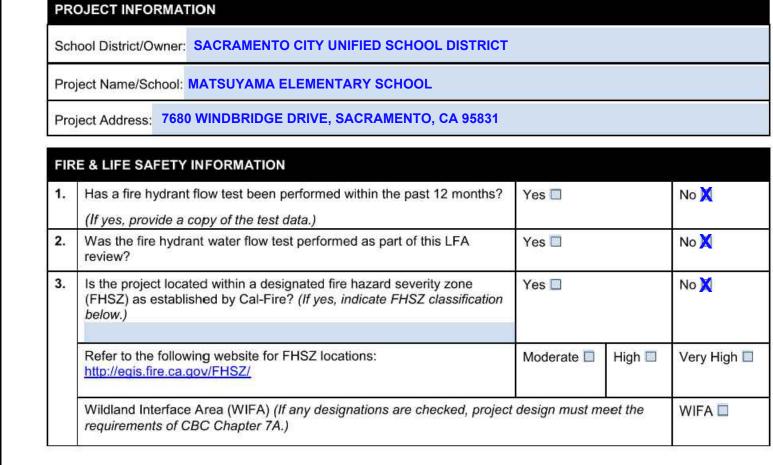

DGS DSA 810 (revised 12/29/20) Page 1 of 4
DIVISION OF THE STATE ARCHITECT DEPARTMENT OF GENERAL SERVICES STATE OF CALIFORNIA

DSA 810

FIRE & LIFE SAFETY SITE CONDITIONS SUBMITTAL

CON	IDITION MEANS AND METHODS RESOLUTION	ALTE	RNATE	ACCEPT	ED
	Emergency vehicle access roadways do not meet CFC requirements.	Yes	No	N/A	N/
4.	Emergency vehicle access roadways do not meet or o requirements.			X	
4a.	Acceptable Alternate: Emergency vehicle and personnel access as proposed by the project architect is acceptable for providing fire suppression and protection of life and property.				
5.	Fire Hydrants: Number and spacing does not meet CFC requirements.			X	
5a.	Acceptable Alternate: Number of fire hydrants and spacing as proposed by the project architect is acceptable for fire suppression and protection of life and property.				
6.	Fire Hydrants: Water flow and pressure are less than CFC minimum.			X	
6a.	Acceptable Alternate: The available flow and pressure is acceptable for providing fire suppression and protection of life and property.				
7.	Location of fire department connection(s) serving fire sprinkler systems or standpipe systems does not meet CFC requirements.			X	
7a.	Acceptable Alternate: The location of fire department connection serving the fire sprinkler system and/or standpipe system is acceptable for providing fire suppression and protection of life and property.				

School District Acceptance of Acceptable Design Alternates

By signing this form, the school district acknowledges and accepts the proposed design as an alternative to California Building Code (CBC) and California Fire Code (CFC) minimum requirements, as indicated by one or more of the conditions indicated at items 4a, 5a, 6a or 7a, for providing fire and life safety protection of life and property.

	ems 4a, 5a, 6a or 7a, for providing fire and life safety protect	mon or me	and property.	
Accepted by:	N/A - NO VARIANCE PROPOSED	_Title:		
Signature:			Date:	

LFA Agency Name: City of Sacramento Fire Department				
LFA Review Official:	King Tunson			
Title: Program Specialist Work Phone: (916) 808-1358				
Work Email: ktur	son@sfd.cityofsacramento.org			
_FA Reviewer's Signa	ture:	Date:		

DGS DSA 810 (revised 12/29/20)

DIVISION OF THE STATE ARCHITECT

DEPARTMENT OF GENERAL SERVICES

STATE OF CALIFORNIA

WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95762 | (916) 985-1870

IER:

Sacramento City Unified School District

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

ONSULTANT:

ANTHONY J. TASSANO NO. C74696

CMIL

T/20/2023

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS

10. DESCRIPTION

DRAWN: SCALE:
SMN AS NOTED

CHECKED: PROJECT NO.
AT 23-055

DESIGNED: DATE:
SMN/AT 4/24/2023


ISSUANCE:

SHEET TITLE:

FIRE ACCESS PLAN

SHEET NO.

C1.0.2

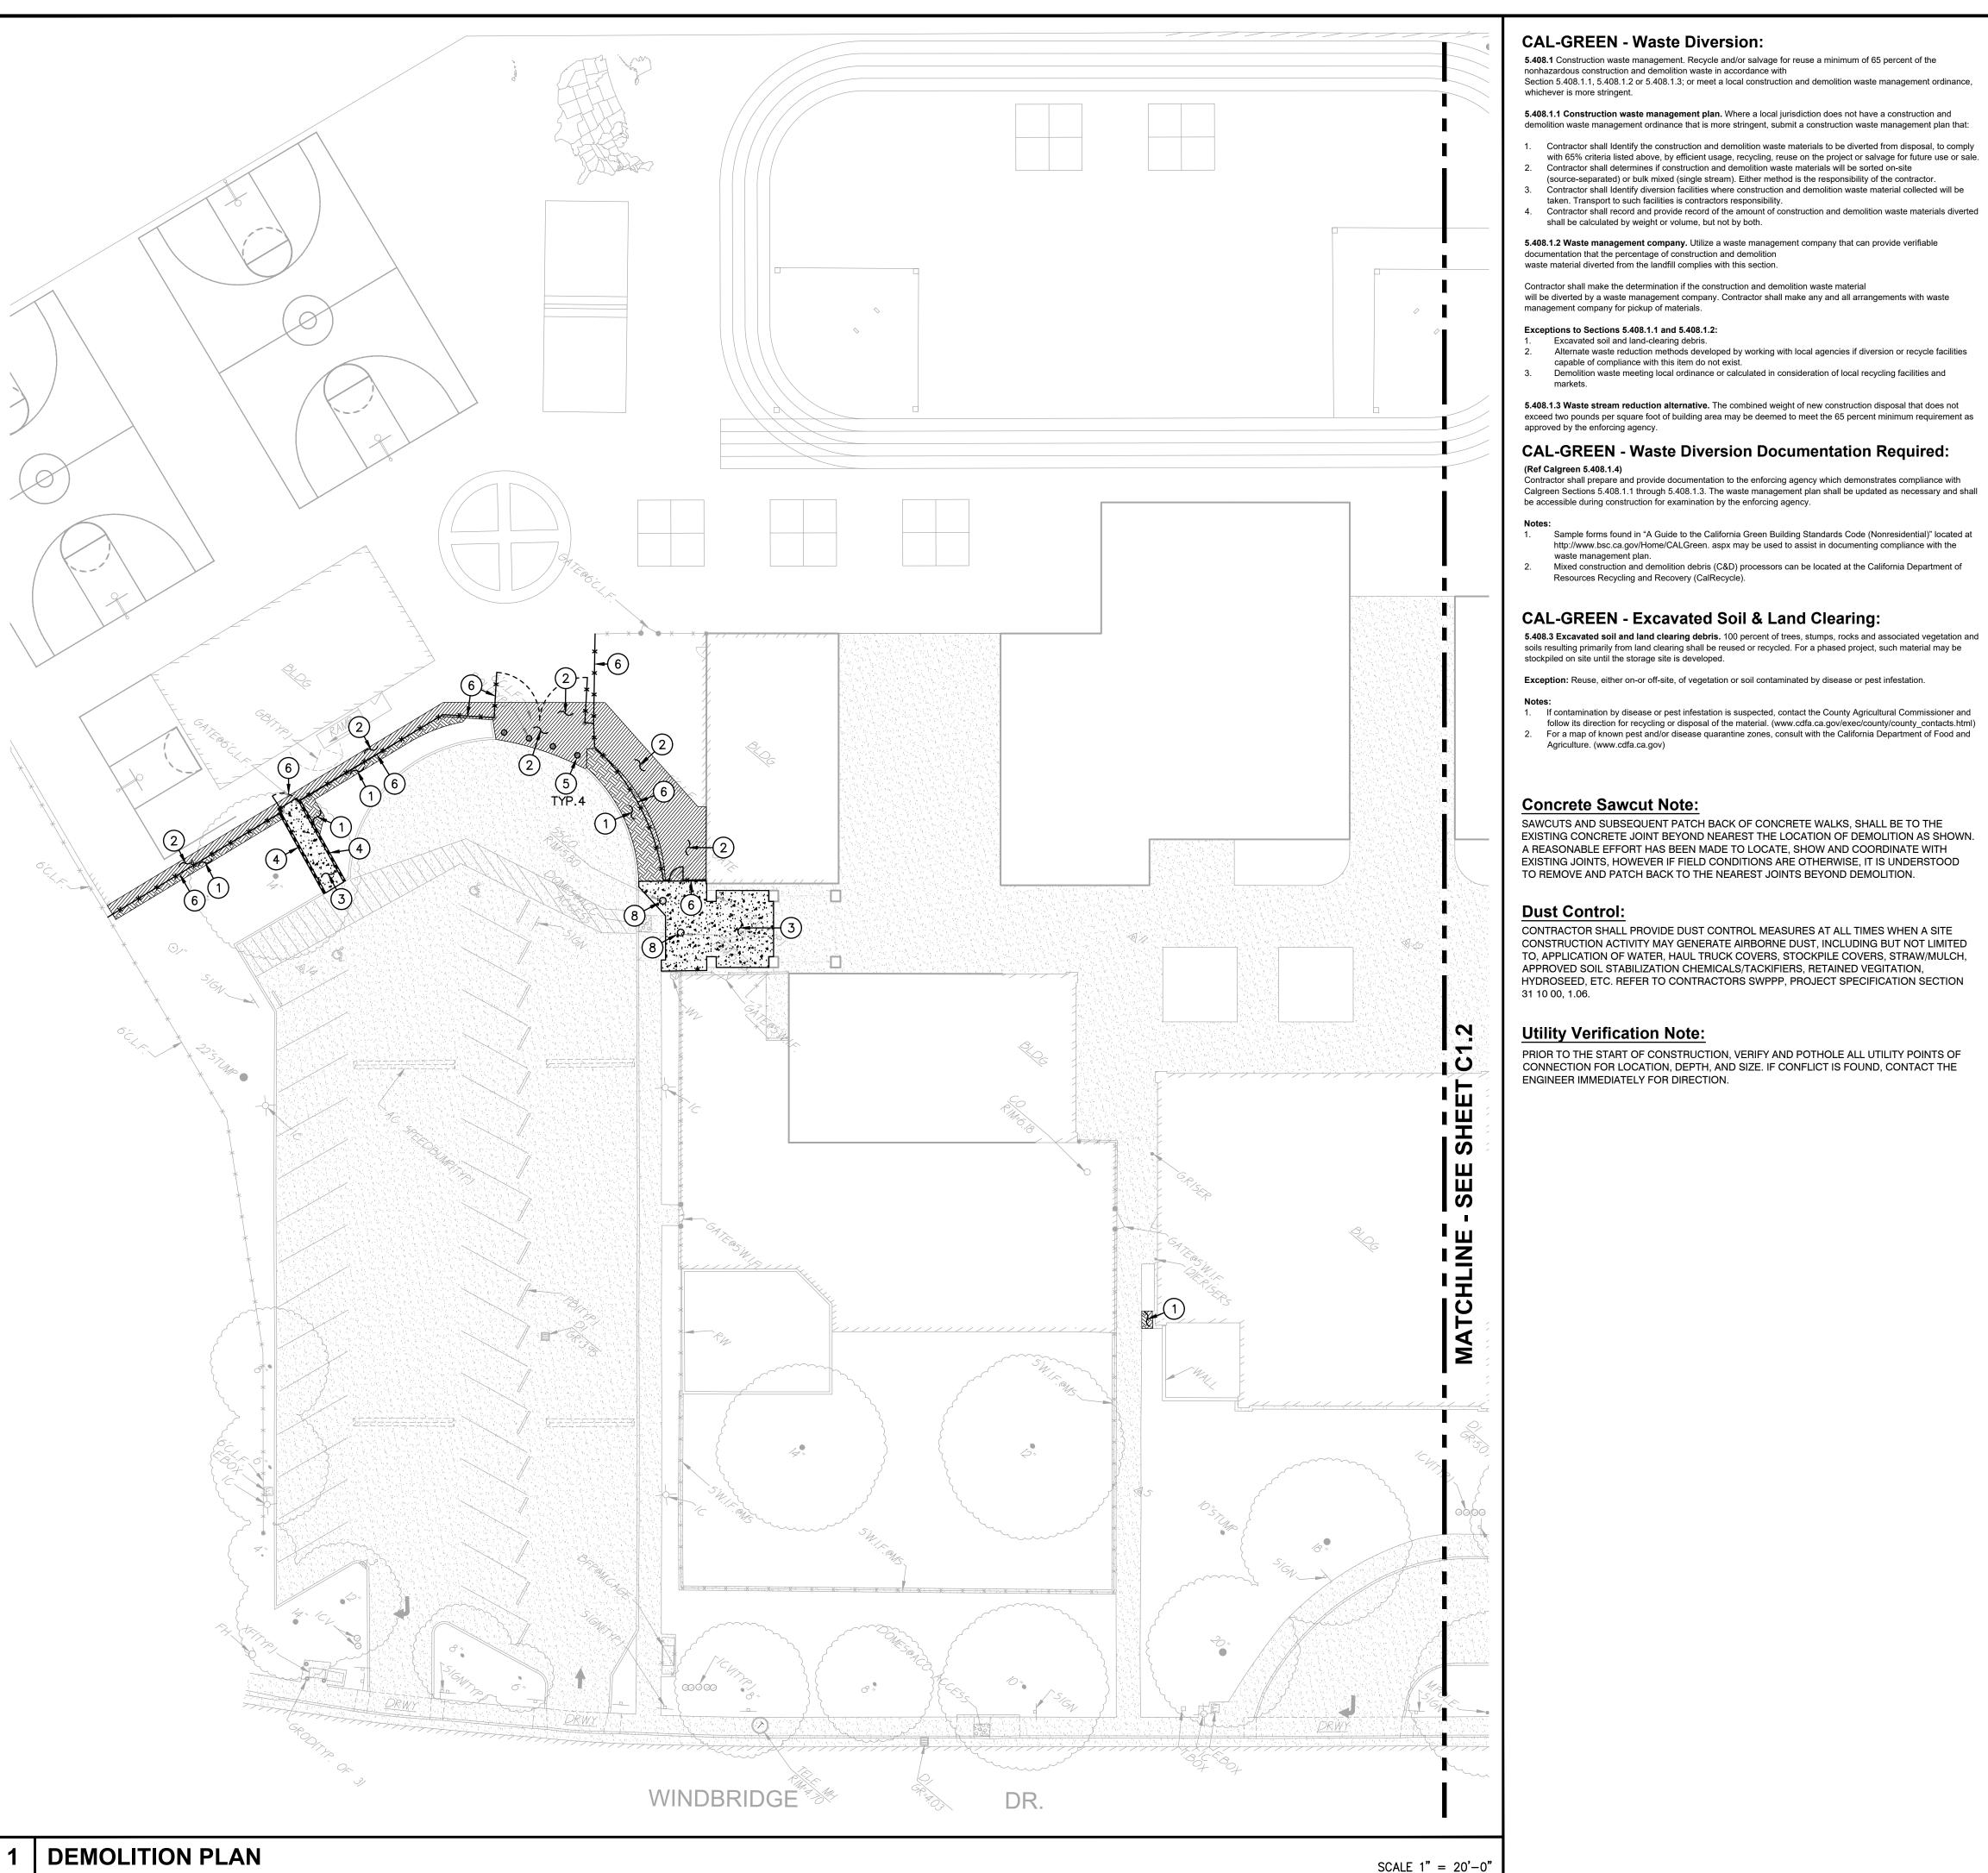

CAL-GREEN - Waste Diversion:

5.408.1 Construction waste management. Recycle and/or salvage for reuse a minimum of 65 percent of the nonhazardous construction and demolition waste in accordance with Section 5.408.1.1, 5.408.1.2 or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent.

5.408.1.1 Construction waste management plan. Where a local jurisdiction does not have a construction and demolition waste management ordinance that is more stringent, submit a construction waste management plan that:

- 1. Contractor shall Identify the construction and demolition waste materials to be diverted from disposal, to comply with 65% criteria listed above, by efficient usage, recycling, reuse on the project or salvage for future use or sale.
- Contractor shall determines if construction and demolition waste materials will be sorted on-site (source-separated) or bulk mixed (single stream). Either method is the responsibility of the contractor. Contractor shall Identify diversion facilities where construction and demolition waste material collected will be
- taken. Transport to such facilities is contractors responsibility. Contractor shall record and provide record of the amount of construction and demolition waste materials diverted shall be calculated by weight or volume, but not by both.

5.408.1.2 Waste management company. Utilize a waste management company that can provide verifiable documentation that the percentage of construction and demolition waste material diverted from the landfill complies with this section.

Contractor shall make the determination if the construction and demolition waste material will be diverted by a waste management company. Contractor shall make any and all arrangements with waste management company for pickup of materials.

Exceptions to Sections 5.408.1.1 and 5.408.1.2:

- Excavated soil and land-clearing debris. Alternate waste reduction methods developed by working with local agencies if diversion or recycle facilities capable of compliance with this item do not exist.
- Demolition waste meeting local ordinance or calculated in consideration of local recycling facilities and

5.408.1.3 Waste stream reduction alternative. The combined weight of new construction disposal that does not exceed two pounds per square foot of building area may be deemed to meet the 65 percent minimum requirement as approved by the enforcing agency.

CAL-GREEN - Waste Diversion Documentation Required:

Contractor shall prepare and provide documentation to the enforcing agency which demonstrates compliance with Calgreen Sections 5.408.1.1 through 5.408.1.3. The waste management plan shall be updated as necessary and shall be accessible during construction for examination by the enforcing agency.

- 1. Sample forms found in "A Guide to the California Green Building Standards Code (Nonresidential)" located at http://www.bsc.ca.gov/Home/CALGreen. aspx may be used to assist in documenting compliance with the
- waste management plan. Mixed construction and demolition debris (C&D) processors can be located at the California Department of Resources Recycling and Recovery (CalRecycle).

CAL-GREEN - Excavated Soil & Land Clearing:

soils resulting primarily from land clearing shall be reused or recycled. For a phased project, such material may be stockpiled on site until the storage site is developed.

Exception: Reuse, either on-or off-site, of vegetation or soil contaminated by disease or pest infestation.

- 1. If contamination by disease or pest infestation is suspected, contact the County Agricultural Commissioner and follow its direction for recycling or disposal of the material. (www.cdfa.ca.gov/exec/county/county_contacts.html) For a map of known pest and/or disease quarantine zones, consult with the California Department of Food and Agriculture. (www.cdfa.ca.gov)

Concrete Sawcut Note:

SAWCUTS AND SUBSEQUENT PATCH BACK OF CONCRETE WALKS, SHALL BE TO THE EXISTING CONCRETE JOINT BEYOND NEAREST THE LOCATION OF DEMOLITION AS SHOWN. A REASONABLE EFFORT HAS BEEN MADE TO LOCATE, SHOW AND COORDINATE WITH EXISTING JOINTS, HOWEVER IF FIELD CONDITIONS ARE OTHERWISE, IT IS UNDERSTOOD TO REMOVE AND PATCH BACK TO THE NEAREST JOINTS BEYOND DEMOLITION.

Dust Control:

CONTRACTOR SHALL PROVIDE DUST CONTROL MEASURES AT ALL TIMES WHEN A SITE CONSTRUCTION ACTIVITY MAY GENERATE AIRBORNE DUST, INCLUDING BUT NOT LIMITED TO, APPLICATION OF WATER, HAUL TRUCK COVERS, STOCKPILE COVERS, STRAW/MULCH, APPROVED SOIL STABILIZATION CHEMICALS/TACKIFIERS, RETAINED VEGITATION. HYDROSEED, ETC. REFER TO CONTRACTORS SWPPP, PROJECT SPECIFICATION SECTION 31 10 00, 1.06.

Utility Verification Note:

PRIOR TO THE START OF CONSTRUCTION, VERIFY AND POTHOLE ALL UTILITY POINTS OF CONNECTION FOR LOCATION, DEPTH, AND SIZE. IF CONFLICT IS FOUND, CONTACT THE ENGINEER IMMEDIATELY FOR DIRECTION.

DEMOLITION GENERAL NOTES

- IN THE EVENT THAT ANY UNUSUAL CONDITIONS NOT COVERED BY THE GEOTECHNICAL INVESTIGATION REPORT OR ARE ENCOUNTERED DURING GRADING OPERATIONS THE GEOTECHNICAL ENGINEER AND THE ENGINEER SHALL BE IMMEDIATELY NOTIFIED FOR
- DIRECTIONS.
 NO BURNING OR BLASTING SHALL BE PERMITTED.
- ADDITIONAL DEMOLITION INFORMATION MAY BE SHOWN ON THE GRADING, DRAINAGE, AND UTILITY PLANS, AND THOSE PLANS PREPARED BY OTHER DISCIPLINES FOR THIS PROJECT.
- ALL DEMOLISHED ITEMS SHALL BE DISPOSED OF OFFSITE AT A SUITABLE, LEGAL, DUMP SITE
- 5. ALL DISPOSED OF MATERIALS SHALL BE RECYCLED IF POSSIBLE.
- THE TYPES, LOCATIONS, SIZES AND/OR DEPTHS OF EXISTING UNDERGROUND UTILITIES AS SHOWN IN THESE PLANS WERE OBTAINED FROM SOURCES OF VARYING RELIABILITY. THE CONTRACTOR IS CAUTIONED THAT ONLY ACTUAL EXCAVATION WILL REVEAL THE TYPES, EXTENT, SIZES, LOCATIONS, AND DEPTHS OF SUCH UNDERGROUND UTILITIES. A REASONABLE EFFORT HAS BEEN MADE TO LOCATE AND DELINEATE ALL KNOWN UNDERGROUND UTILITIES. HOWEVER, WARREN CONSULTING ENGINEERS CAN ASSUME NO RESPONSIBILITY FOR THE COMPLETENESS OR ACCURACY OF ITS DELINEATION OF SUCH UNDERGROUND UTILITIES, NOR FOR THE EXISTENCE OF OTHER BURIED OBJECTS OR UTILITIES WHICH MAY BE ENCOUNTERED BUT WHICH ARE NOT SHOWN ON THESE DRAWINGS. THE CONTRACTOR OR ANY SUBCONTRACTOR FOR THIS CONTRACT SHALL NOTIFY THE DISTRICT TWO (2) WORKING DAYS IN ADVANCE OF PERFORMING ANY EXCAVATION WORK IN ORDER TO VERIFY TO THE GREATEST EXTENT POSSIBLE THE EXISTING UTILITY LINES, CONFLICTS AND PROPOSED UTILITY CONNECTION POINTS.
- THE SCHOOL DISTRICT SHALL HAVE SALVAGE RIGHTS TO ANY DEMOLISHED ITEMS SHOWN HEREON. THE CONTRACTOR SHALL GIVE THE DISTRICT NOTICE 7 DAYS PRIOR TO THE START OF DEMOLITION. THE DISTRICT SHALL MOVE ANY RETAINED ITEMS OUT OF THE CONTRACTORS WORK AREA, UNLESS ANOTHER ARRANGEMENT IS MADE WITH THE CONTRACTOR. ANY REMAINING ITEMS BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE REMOVED FROM THE SITE. ANY ITEMS NOT SHOWN FOR REMOVAL SHALL REMAIN AND SHALL BE
- PROTECTED FROM DAMAGE DURING CONSTRUCTION TO A REASONABLE EXTEND. EXISTING UTILITY STRUCTURES IN AREAS OF NEW PAVING SHALL BE REMOVED AND REINSTALLED AT NEW GRADE UNLESS SPECIFICALLY NOTED OTHERWISE.
- 9. ITEMS OUTSIDE THE LIMITS OF DEMOLITION SHALL REMAIN AND BE PROTECTED FROM DAMAGE DURING CONSTRUCTION...
- 10. CONTRACTOR SHALL COMPLY WITH CHAPTER 33 OF THE 2019 CFC, "FIRE SAFETY DURING CONSTRUCTION AND DEMOLITION" AT ALL TIMES DURING CONSTRUCTION.
- CONTRACTOR SHALL HIRE A UTILITY LOCATING COMPANY AND SHALL SCAN THE ENTIRE AREA WITHIN THE LIMITS OF NEW WORK. ALL UTILITIES LOCATED SHALL BE MARKED AND PROTECTED DURING THE LIMING OPERATIONS AS WELL AS ANY EXCAVATING TASKS. ANY

LOCATED UTILITY DAMAGED WITHIN THE LIMITS OF WORK WILL BE THE RESPONSIBILITY OF

12. ALL DEMOLITION SHALL BE APPROPRIATELY SUPPORTED AND REINFORCED DURING REMOVAL TO PREVENT INJURY FROM FALLING, PROJECTILE, OR OTHERWISE MOVING DEBRIS OR OTHER DELETERIOUS MATERIAL. ONSITE SAFETY WITHIN THE LIMITS OF WORK IS THE CONTRACTORS SOLE RESPONSIBILITY.

DEMOLITION NOTES

THE CONTRACTOR TO REPAIR.

NOTE: NOT ALL NOTES MAY BE USED ON THIS SHEET

REMOVE EXISTING ASPHALT PAVING AND BASE TO ALLOW FOR NEW WORK.

AC MAY BE GRINDED AND BLENDED WITH EXISTING BASE. EXCAVATED AND

LEGEND # DEMOLITION NOTES

REMOVE ALL PLANTS, SHRUBS, EXISTING VEGETATION, AND IRRIGATION SYSTEMS. REFER TO EARTHWORK SPECIFICATIONS FOR ADDITIONAL SITE CLEARING REQUIREMENTS. SEE GENERAL IRRIGATION NOTE. THIS SHEET.



USED AS FILL, REFER TO EARTHWORK SPECIFICATIONS. 3. REMOVE EXISTING CONCRETE PAVING AND BASE ROCK, WHERE SAWCUTS ARE NECESSARY, THEY SHALL BE A NEAT STRAIGHT LINE. CUT SHALL BE MADE

4. REMOVE EXISTING CONCRETE CURB, MOWBAND, APRON OR GUTTER AS

AT NEAREST EXISTING JOINT TO LOCATION SHOWN.

- 5. REMOVE EXISTING POST AND/OR POST HOLE, TO INCLUDE SLEEVE AND CONCRETE BASE IF PRESENT.
- * * * 6. REMOVE EXISTING CHAIN LINK FENCING AND GATES AS SHOWN. REMOVE POST TO INCLUDE CONCRETE FOOTINGS.
 - 7. REMOVE EXISTING METAL RAILING.
 - 8. REMOVE EXISTING UTILITY BOX. PROTECT UTILITIES. PROVIDE NEW TRAFFIC RATED UTILITY BOX OF SAME SIZE AND APPROPRIATE FOR UTILITY, REFER TO SPECIFICATIONS. SET FLUSH WITH PROPOSED FINISHED GRADE.



EL DORADO HILLS, CA 95762 | (916) 985-1870



Sacramento City **Unified School District** 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

ANTHONY . **TASSANO** NO. C74696

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

> **REVISIONS** DESCRIPTION

SCALE: AS NOTE PROJECT NO. CHECKED: 23-055 DESIGNED: SMN/AT 4/24/2023

ISSUANCE:


SHEET TITLE:

DEMOLITION PLAN

SHEET NO.

C1.1

GRAPHIC SCALE Call before you dig. THIS DRAWING MAY HAVE BEEN ENLARGED OR REDUCED.

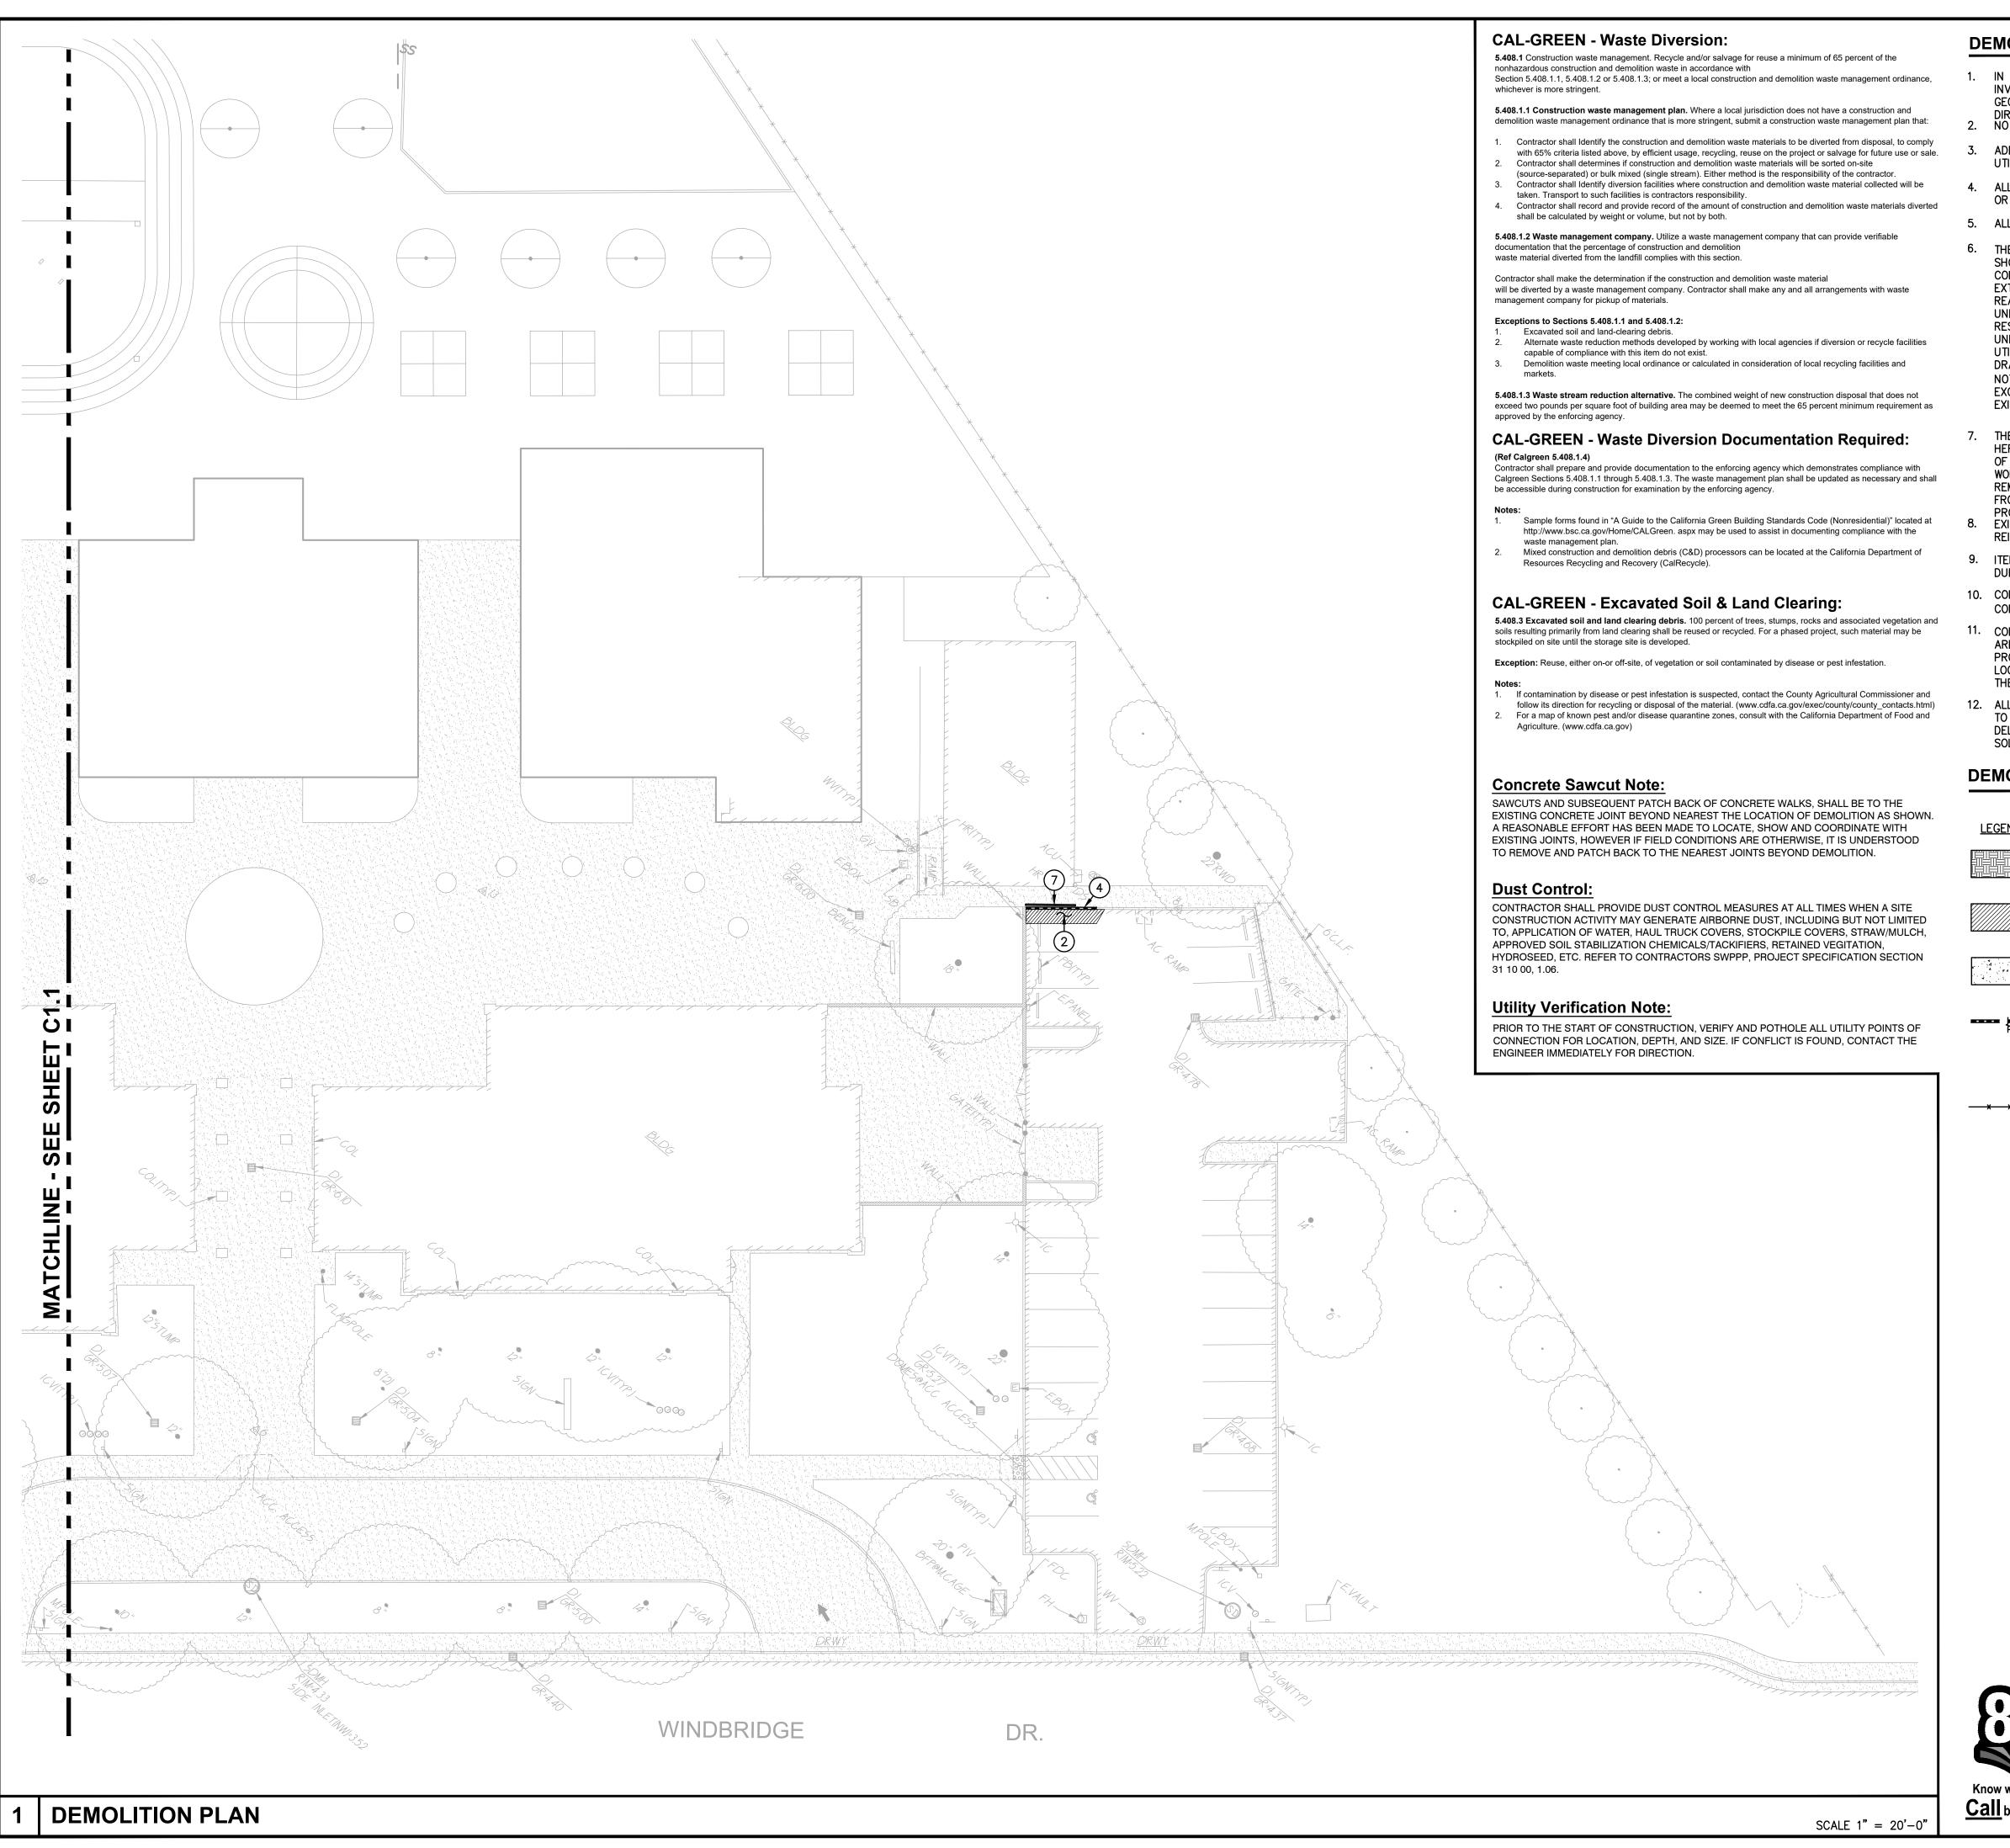

DEMOLITION GENERAL NOTES

- IN THE EVENT THAT ANY UNUSUAL CONDITIONS NOT COVERED BY THE GEOTECHNICAL INVESTIGATION REPORT OR ARE ENCOUNTERED DURING GRADING OPERATIONS THE GEOTECHNICAL ENGINEER AND THE ENGINEER SHALL BE IMMEDIATELY NOTIFIED FOR
- DIRECTIONS.
 NO BURNING OR BLASTING SHALL BE PERMITTED.
- ADDITIONAL DEMOLITION INFORMATION MAY BE SHOWN ON THE GRADING, DRAINAGE, AND UTILITY PLANS, AND THOSE PLANS PREPARED BY OTHER DISCIPLINES FOR THIS PROJECT.
- ALL DEMOLISHED ITEMS SHALL BE DISPOSED OF OFFSITE AT A SUITABLE, LEGAL, DUMP SITE OR OTHER FACILITY.
- 5. ALL DISPOSED OF MATERIALS SHALL BE RECYCLED IF POSSIBLE.
- THE TYPES, LOCATIONS, SIZES AND/OR DEPTHS OF EXISTING UNDERGROUND UTILITIES AS SHOWN IN THESE PLANS WERE OBTAINED FROM SOURCES OF VARYING RELIABILITY. THE CONTRACTOR IS CAUTIONED THAT ONLY ACTUAL EXCAVATION WILL REVEAL THE TYPES, EXTENT, SIZES, LOCATIONS, AND DEPTHS OF SUCH UNDERGROUND UTILITIES. A REASONABLE EFFORT HAS BEEN MADE TO LOCATE AND DELINEATE ALL KNOWN UNDERGROUND UTILITIES. HOWEVER, WARREN CONSULTING ENGINEERS CAN ASSUME NO RESPONSIBILITY FOR THE COMPLETENESS OR ACCURACY OF ITS DELINEATION OF SUCH UNDERGROUND UTILITIES, NOR FOR THE EXISTENCE OF OTHER BURIED OBJECTS OR UTILITIES WHICH MAY BE ENCOUNTERED BUT WHICH ARE NOT SHOWN ON THESE DRAWINGS. THE CONTRACTOR OR ANY SUBCONTRACTOR FOR THIS CONTRACT SHALL NOTIFY THE DISTRICT TWO (2) WORKING DAYS IN ADVANCE OF PERFORMING ANY EXCAVATION WORK IN ORDER TO VERIFY TO THE GREATEST EXTENT POSSIBLE THE EXISTING UTILITY LINES, CONFLICTS AND PROPOSED UTILITY CONNECTION POINTS.
- THE SCHOOL DISTRICT SHALL HAVE SALVAGE RIGHTS TO ANY DEMOLISHED ITEMS SHOWN HEREON. THE CONTRACTOR SHALL GIVE THE DISTRICT NOTICE 7 DAYS PRIOR TO THE START OF DEMOLITION. THE DISTRICT SHALL MOVE ANY RETAINED ITEMS OUT OF THE CONTRACTORS WORK AREA, UNLESS ANOTHER ARRANGEMENT IS MADE WITH THE CONTRACTOR. ANY REMAINING ITEMS BECOME THE PROPERTY OF THE CONTRACTOR AND SHALL BE REMOVED FROM THE SITE. ANY ITEMS NOT SHOWN FOR REMOVAL SHALL REMAIN AND SHALL BE
- PROTECTED FROM DAMAGE DURING CONSTRUCTION TO A REASONABLE EXTEND. EXISTING UTILITY STRUCTURES IN AREAS OF NEW PAVING SHALL BE REMOVED AND REINSTALLED AT NEW GRADE UNLESS SPECIFICALLY NOTED OTHERWISE.
- 9. ITEMS OUTSIDE THE LIMITS OF DEMOLITION SHALL REMAIN AND BE PROTECTED FROM DAMAGE DURING CONSTRUCTION..
- 10. CONTRACTOR SHALL COMPLY WITH CHAPTER 33 OF THE 2019 CFC, "FIRE SAFETY DURING CONSTRUCTION AND DEMOLITION" AT ALL TIMES DURING CONSTRUCTION.
- CONTRACTOR SHALL HIRE A UTILITY LOCATING COMPANY AND SHALL SCAN THE ENTIRE AREA WITHIN THE LIMITS OF NEW WORK. ALL UTILITIES LOCATED SHALL BE MARKED AND PROTECTED DURING THE LIMING OPERATIONS AS WELL AS ANY EXCAVATING TASKS. ANY LOCATED UTILITY DAMAGED WITHIN THE LIMITS OF WORK WILL BE THE RESPONSIBILITY OF THE CONTRACTOR TO REPAIR.
- ALL DEMOLITION SHALL BE APPROPRIATELY SUPPORTED AND REINFORCED DURING REMOVAL TO PREVENT INJURY FROM FALLING, PROJECTILE, OR OTHERWISE MOVING DEBRIS OR OTHER DELETERIOUS MATERIAL. ONSITE SAFETY WITHIN THE LIMITS OF WORK IS THE CONTRACTORS SOLE RESPONSIBILITY.

DEMOLITION NOTES

NOTE: NOT ALL NOTES MAY BE USED ON THIS SHEET

LEGEND # DEMOLITION NOTES

REMOVE ALL PLANTS, SHRUBS, EXISTING VEGETATION, AND IRRIGATION SYSTEMS. REFER TO EARTHWORK SPECIFICATIONS FOR ADDITIONAL SITE CLEARING REQUIREMENTS. SEE GENERAL IRRIGATION NOTE. THIS SHEET.



USED AS FILL, REFER TO EARTHWORK SPECIFICATIONS. 3. REMOVE EXISTING CONCRETE PAVING AND BASE ROCK, WHERE SAWCUTS ARE NECESSARY, THEY SHALL BE A NEAT STRAIGHT LINE. CUT SHALL BE MADE AT NEAREST EXISTING JOINT TO LOCATION SHOWN.

REMOVE EXISTING ASPHALT PAVING AND BASE TO ALLOW FOR NEW WORK.

AC MAY BE GRINDED AND BLENDED WITH EXISTING BASE, EXCAVATED AND

4. REMOVE EXISTING CONCRETE CURB, MOWBAND, APRON OR GUTTER AS

5. REMOVE EXISTING POST AND/OR POST HOLE, TO INCLUDE SLEEVE AND CONCRETE BASE IF PRESENT.

POST TO INCLUDE CONCRETE FOOTINGS.

7. REMOVE EXISTING METAL RAILING.

GRAPHIC SCALE

THIS DRAWING MAY HAVE BEEN ENLARGED OR REDUCED.





Sacramento City **Unified School District** 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

ANTHONY J TASSANO NO. C74696

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831


REVISIONS DESCRIPTION

SCALE: AS NOTE PROJECT NO. CHECKED: DESIGNED: SMN/AT 4/24/2023 ISSUANCE:

DEMOLITION PLAN

C1.2



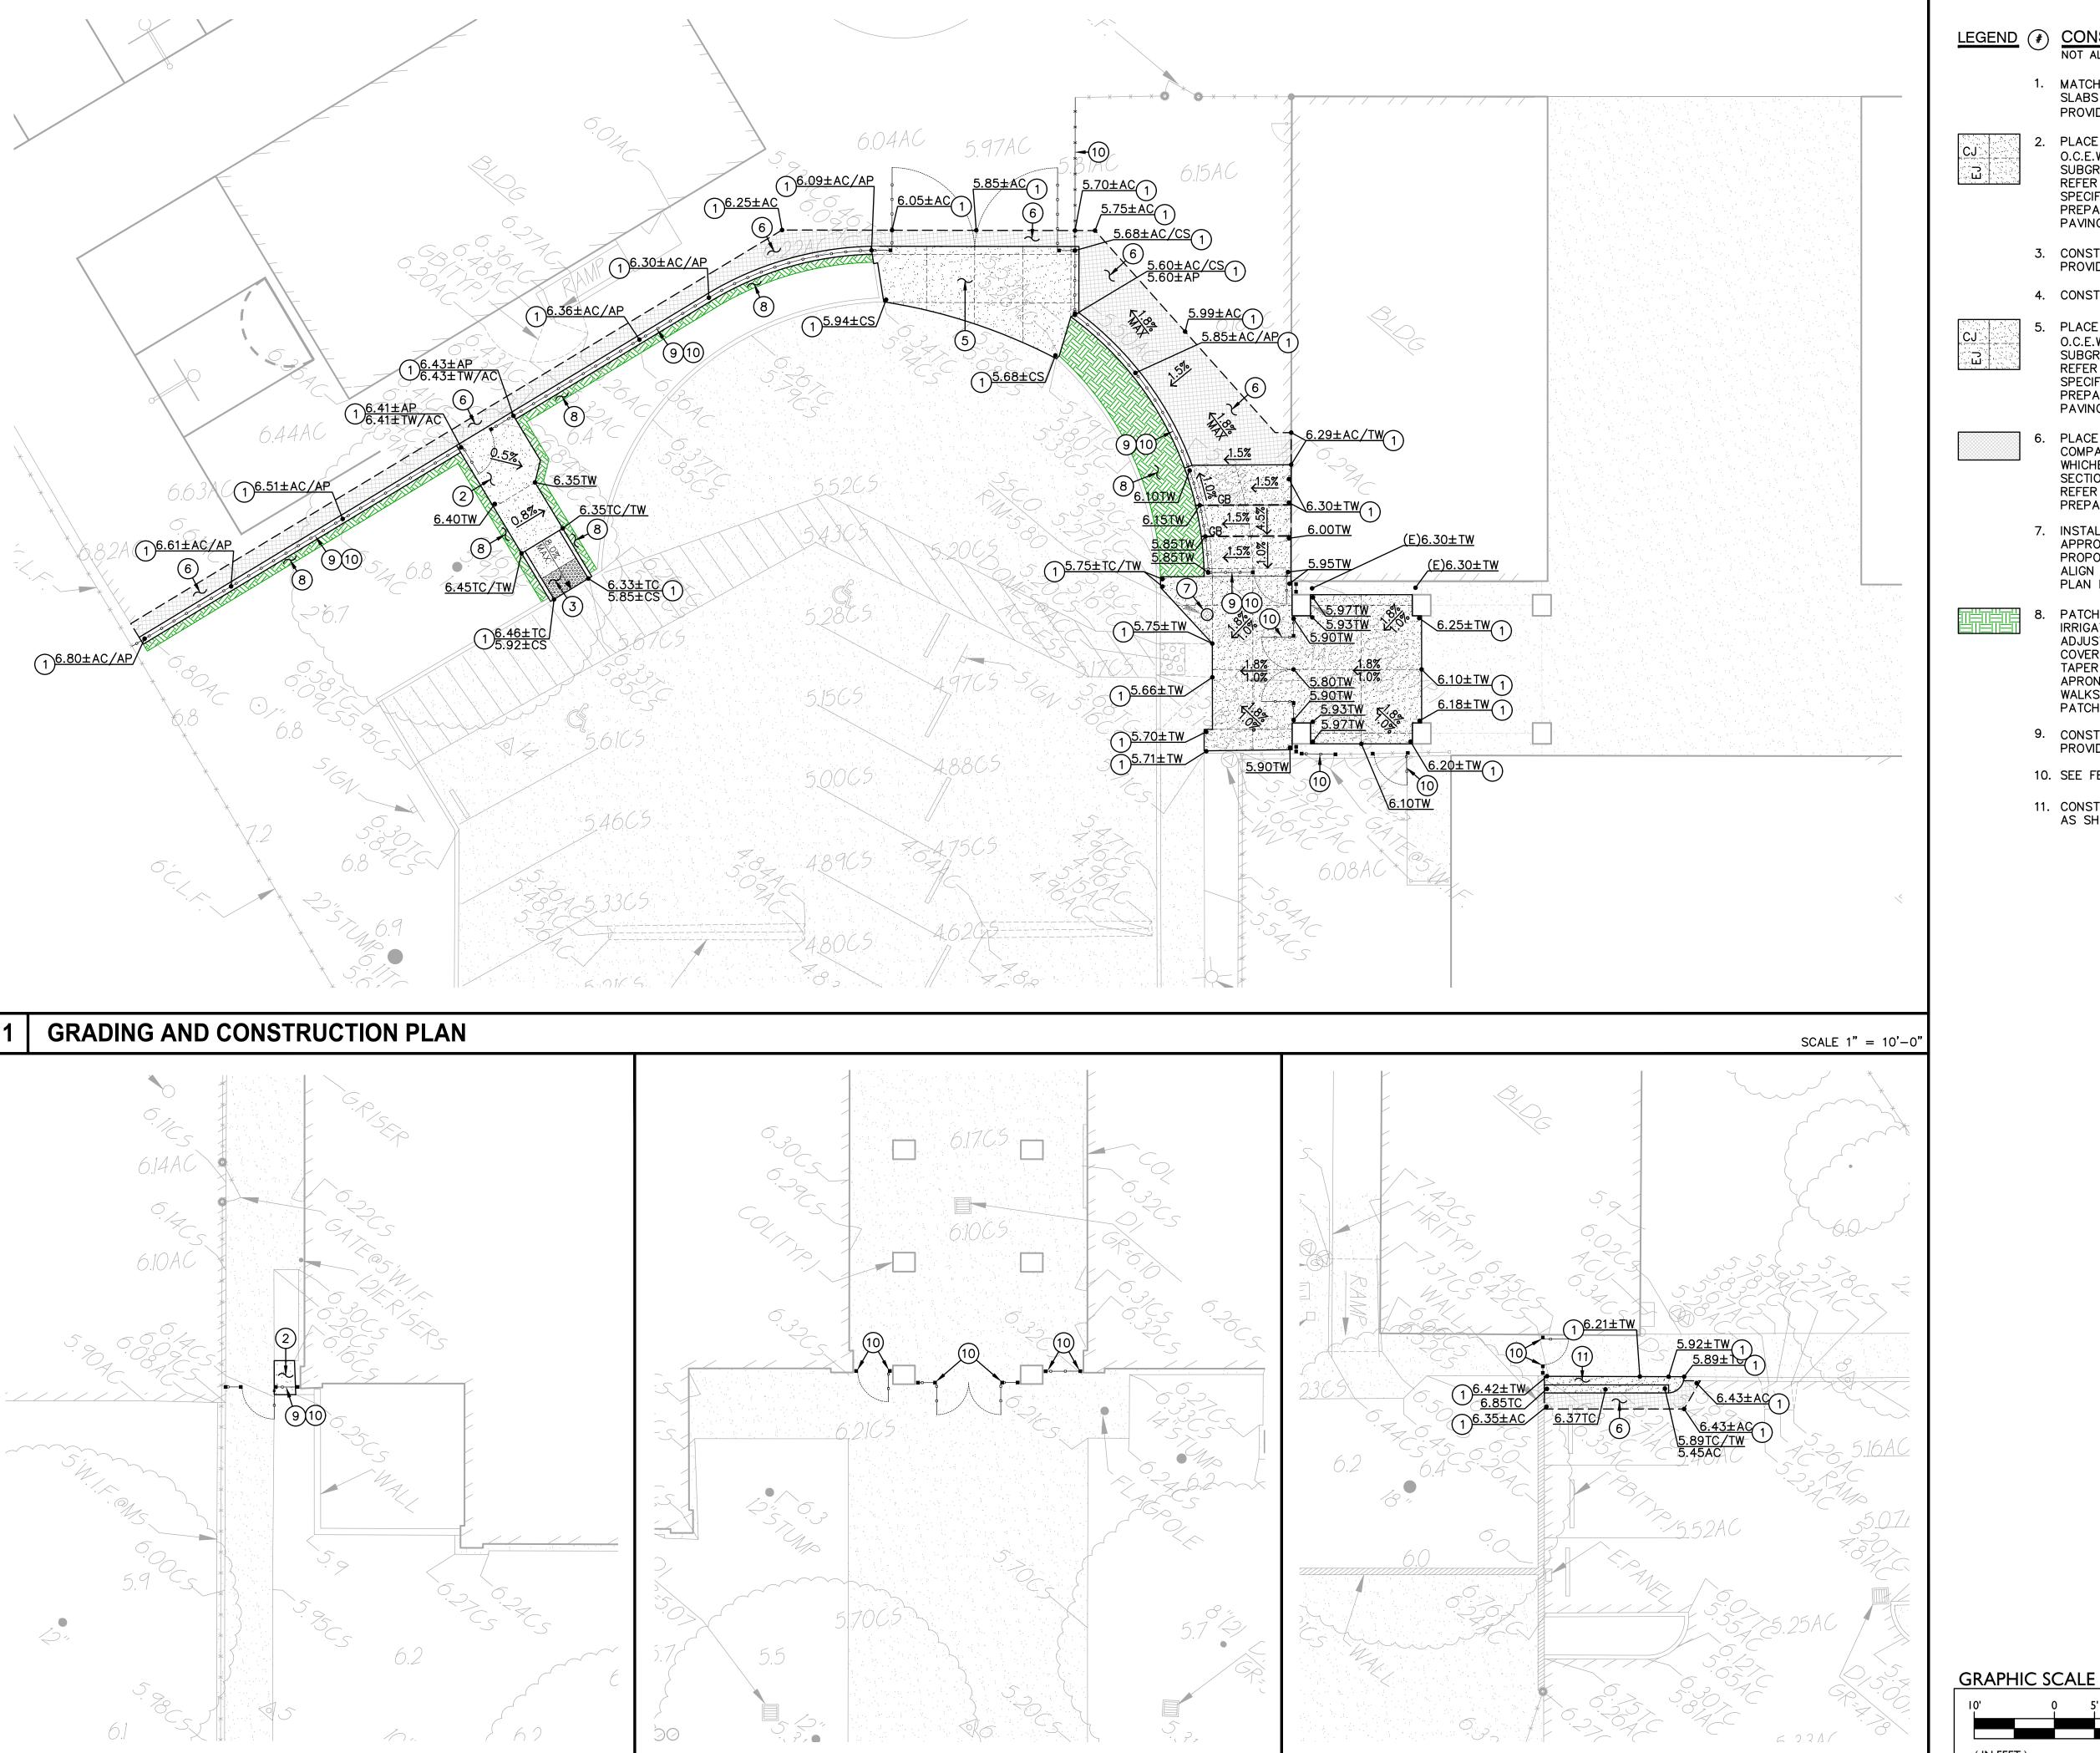

GRADING AND CONSTRUCTION PLAN

GRADING AND CONSTRUCTION PLAN

GRADING AND CONSTRUCTION PLAN

LEGEND (*) CONSTRUCTION NOTES

MATCH EXISTING GRADE/ELEVATION. WHEN MATCHING NEW $\begin{pmatrix} 1 \\ C4 \end{pmatrix}$ PROVIDED AT 24" O.C.


PLACE 5" CONCRETE PAVING WITH #4 REBAR AT 24" O.C.E.W. OVER 6" CLASS II AB ON COMPACTED SUBGRADE PER THE TYPICAL DETAILS PROVIDED. REFER TO PAVING PLAN FOR SECTIONS. REFER TO SPECIFICATIONS SECTION 31 00 00 FOR SUBGRADE PREPARATION, SECTION 32 16 00 FOR CONCRETE



4. CONSTRUCT CONCRETE CURB PER THE DETAIL PROVIDED. C4.1



PLACE 6" CONCRETE PAVING WITH #4 REBAR AT 18" O.C.E.W. OVER 8" CLASS II AB ON COMPACTED SUBGRADE PER THE TYPICAL DETAILS PROVIDED. REFER TO PAVING PLAN FOR SECTIONS. REFER TO SPECIFICATIONS SECTION 31 00 00 FOR SUBGRADE PREPARATION, SECTION 32 16 00 FOR CONCRETE

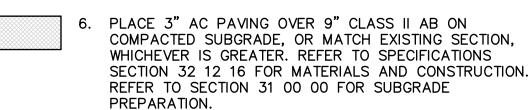

7. INSTALL NEW TRAFFIC RATED UTILITY BOX OF SAME SIZE AND APPROPRIATE FOR UTILITY. SET NEW BOX FLUSH WITH PROPOSED FINISHED GRADE. WHEN IN NEW CONCRETE AREAS, ALIGN WITH NEW JOINT PATTERNS WHEN POSSIBLE. SEE DEMO PLAN FOR EXISTING BOX REMOVAL.

PATCH AND REPAIR EXISTING LANDSCAPING AND IRRIGATION ALONG EDGE OF NEW WORK. RELOCATE AND 2 ADJUST EXISTING HEADS AS NEEDED TO MAIAIN COVERAGE. REPLACE ALL BROKEN HEADS RELOCATED. TAPER ALL GRADING AWAY FROM NEW CURBS AND APRONS AND SET GRADES BELOW APRONS, CURBS AND WALKS TO ALLOW FOR LAWN AND OTHER PLANTING PATCH BACK PER THE DETAILS PROVIDED.

- 9. CONSTRUCT 12" WIDE CONCRETE APRON PER THE DETAIL PROVIDED.
- 10. SEE FENCING PLAN FOR NEW FENCING.

THIS DRAWING MAY HAVE BEEN ENLARGED OR REDUCED.

SCALE 1" = 10'-0"

11. CONSTRUCT RAISED CONCRETE MEDIAN, VARIABLE WIDTH AS SHOWN, SIM. TO THE DETAIL PROVIDED.







C4.1



Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:



Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831


	REVISIONS
NO.	DESCRIPTION


DRAWN:		SCALE:
	SMN	AS NOTED
CHECKED:		PROJECT NO.
	ΑT	23-055
DESIGNED:		DATE:
SMI	N/AT	4/24/2023
ISSUANCE:		


GRADING AND CONSTRUCTION PLAN


SHEET NO.

C2.1

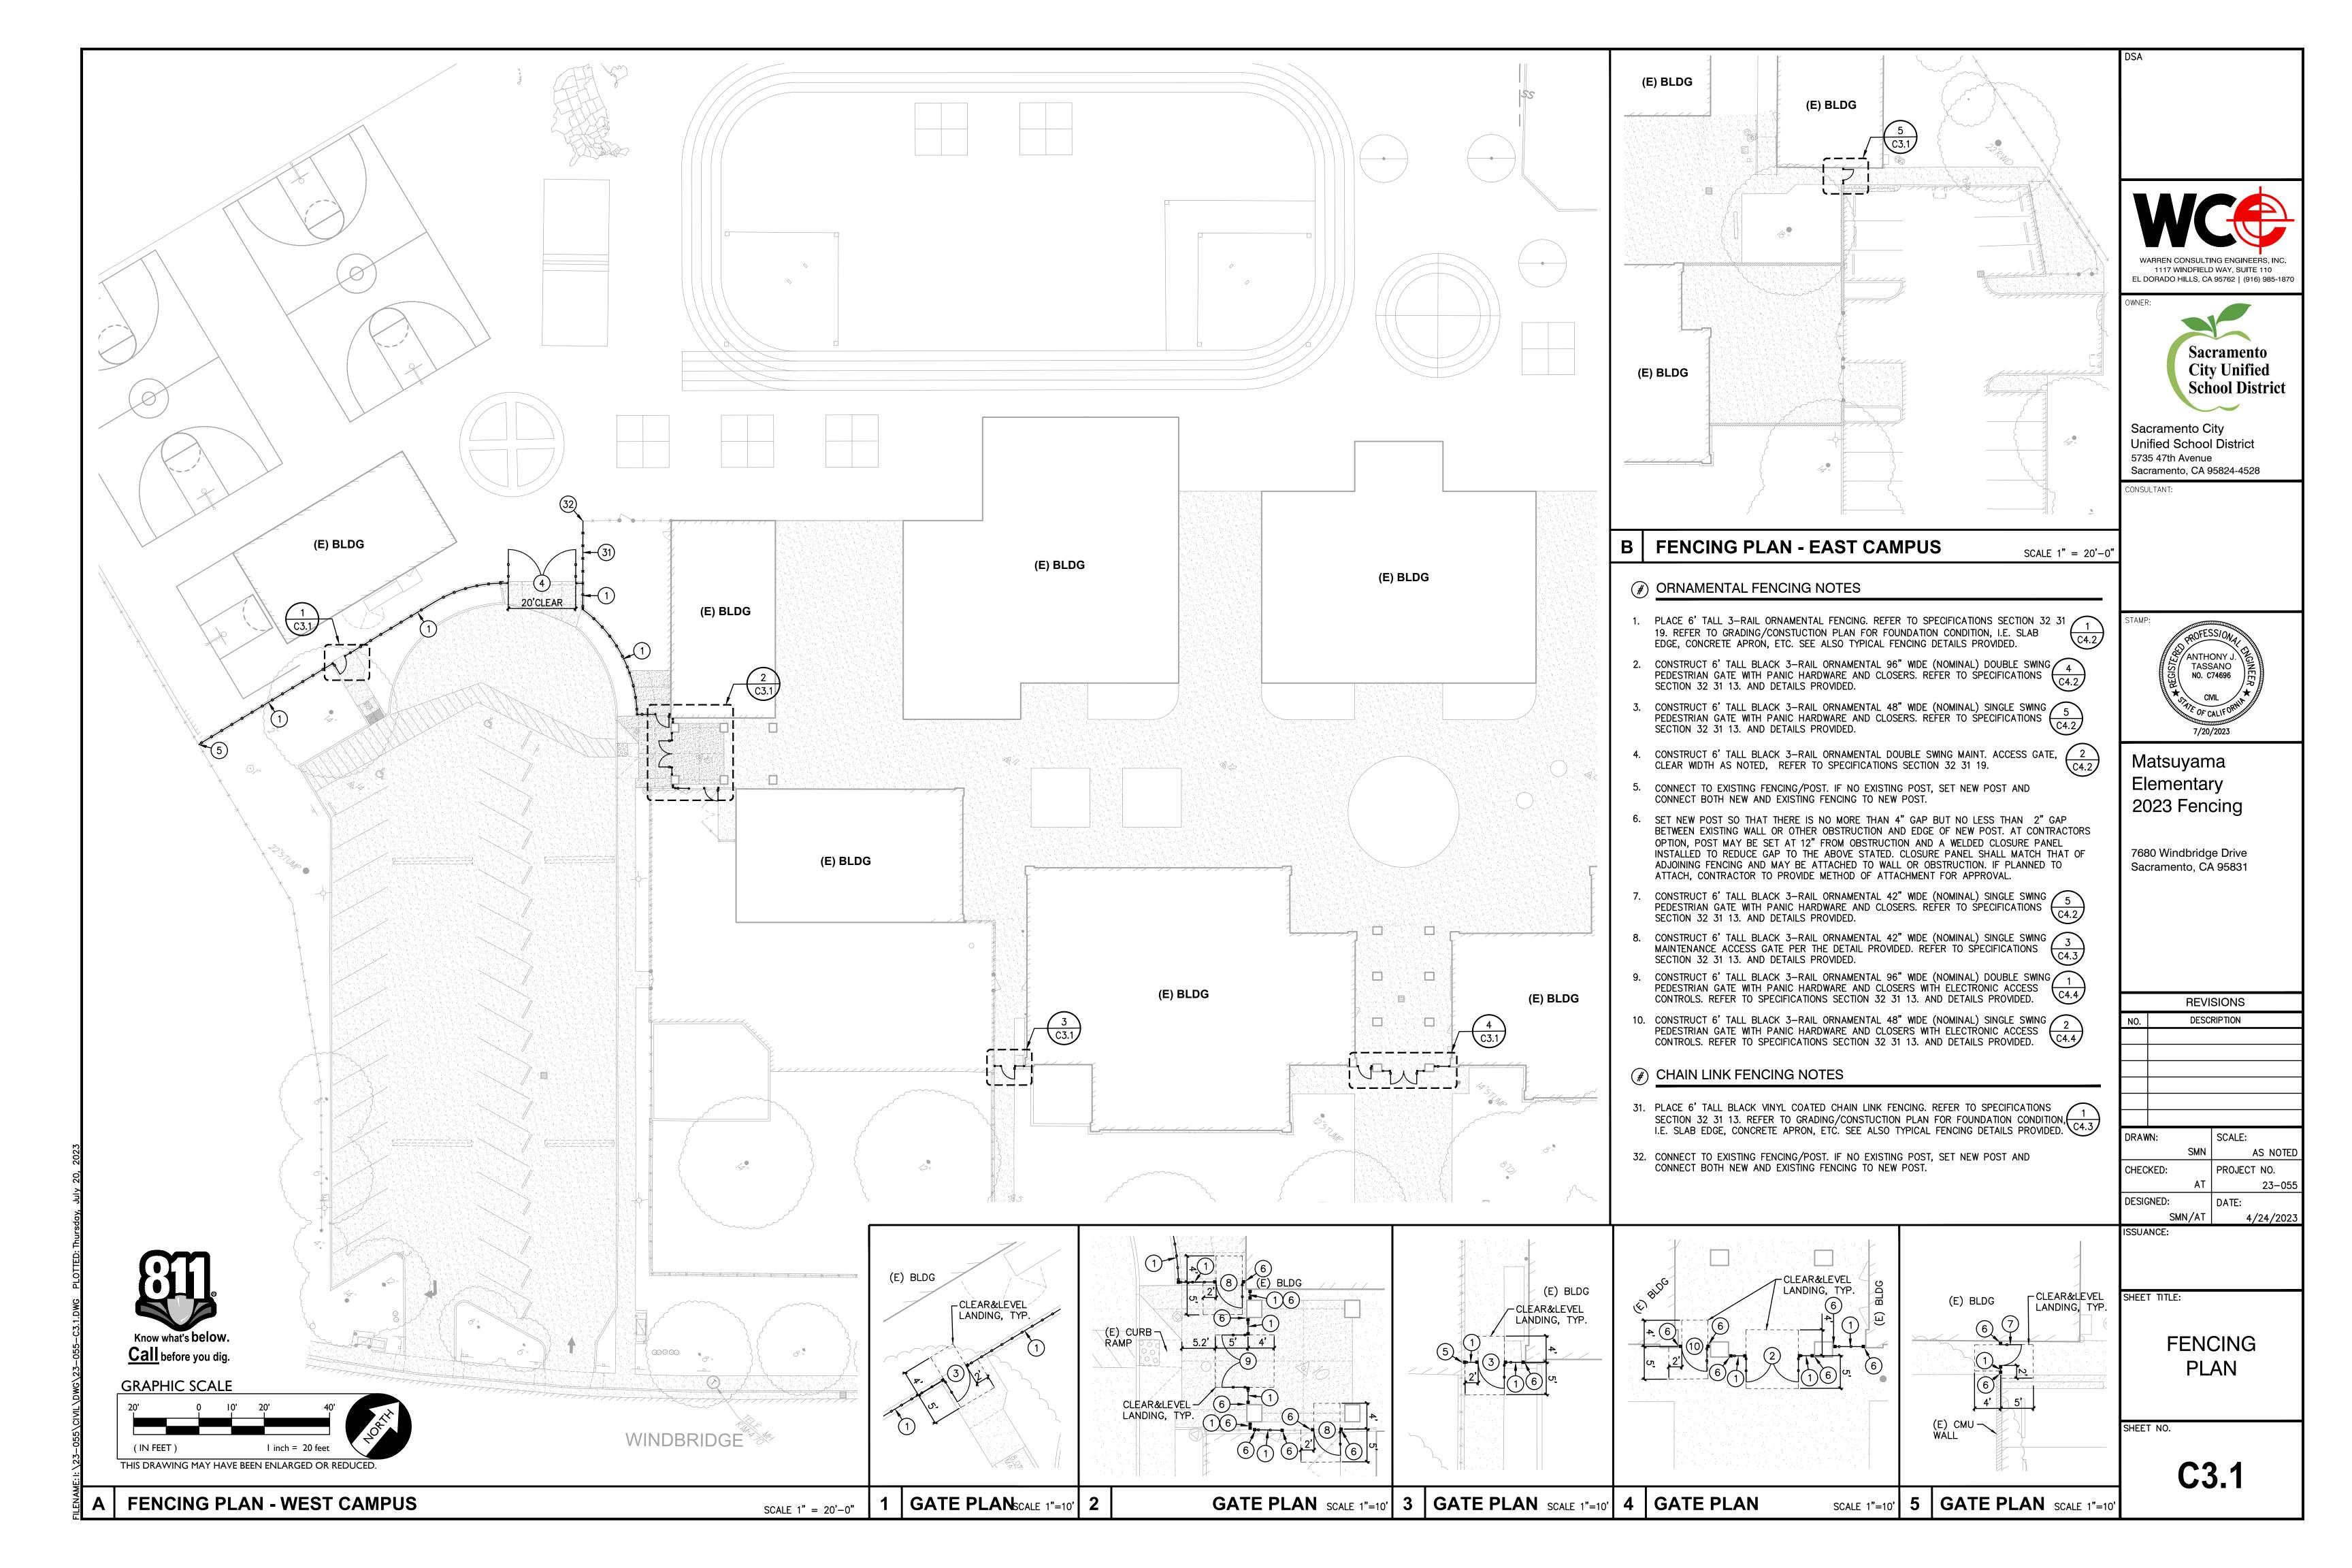

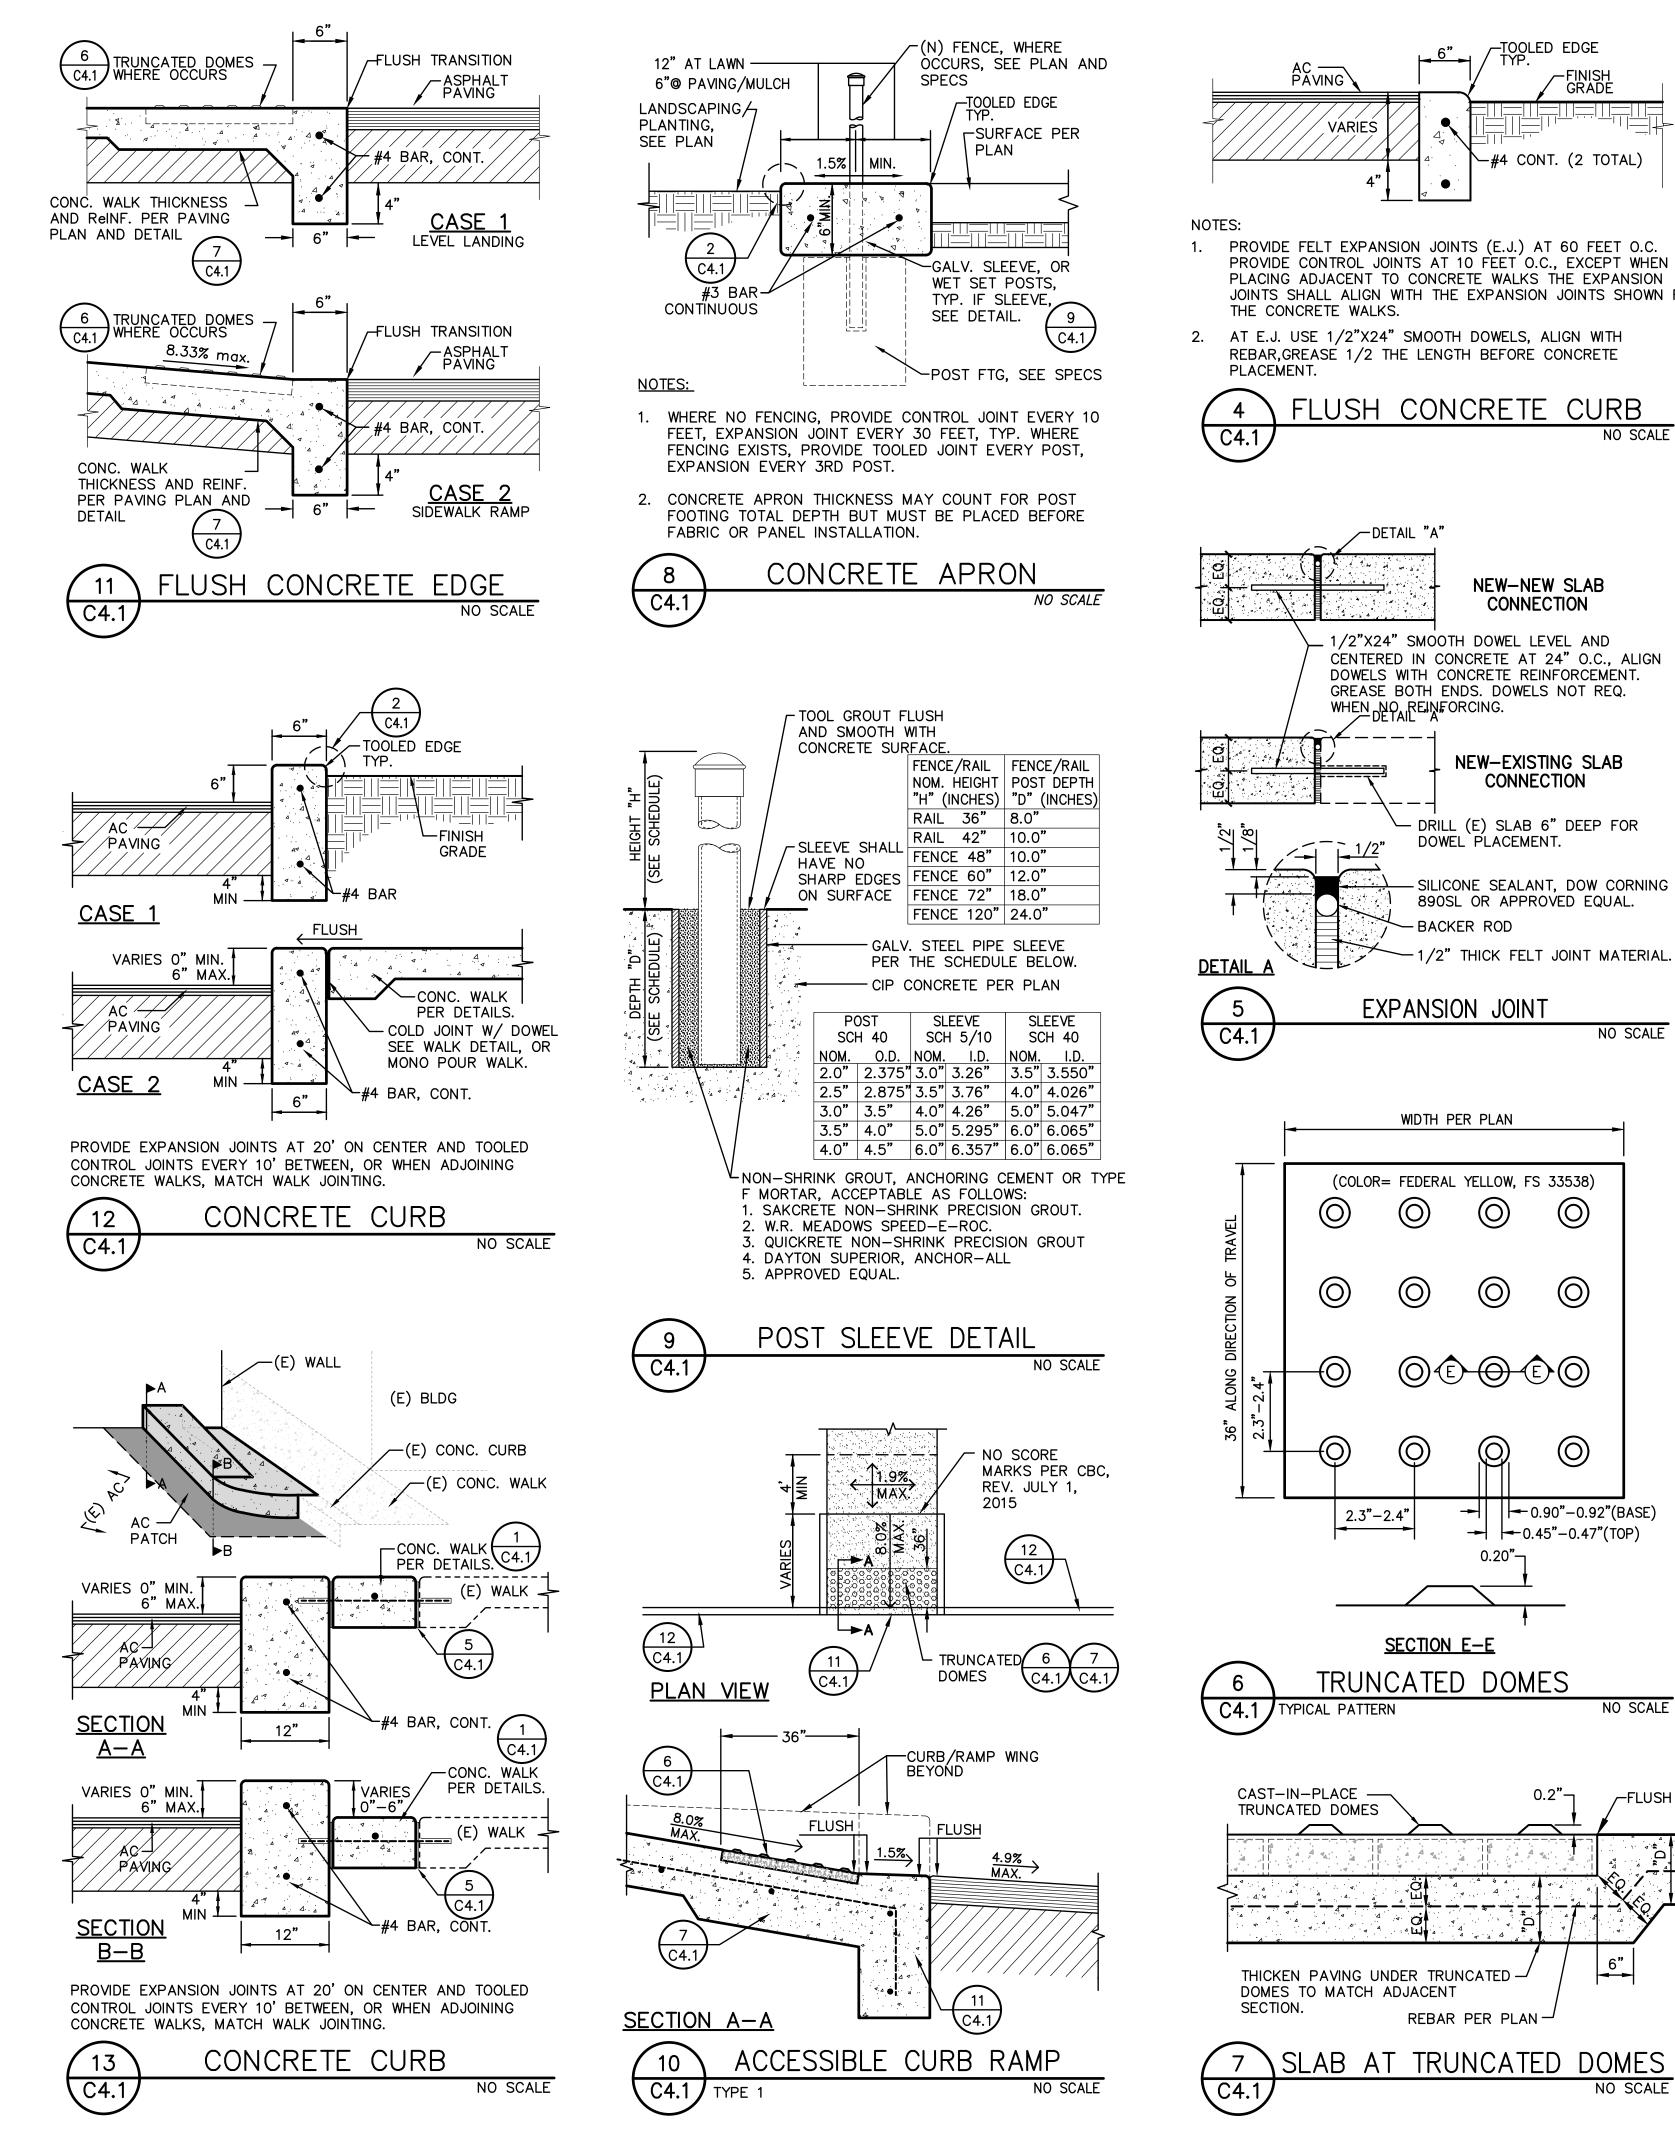


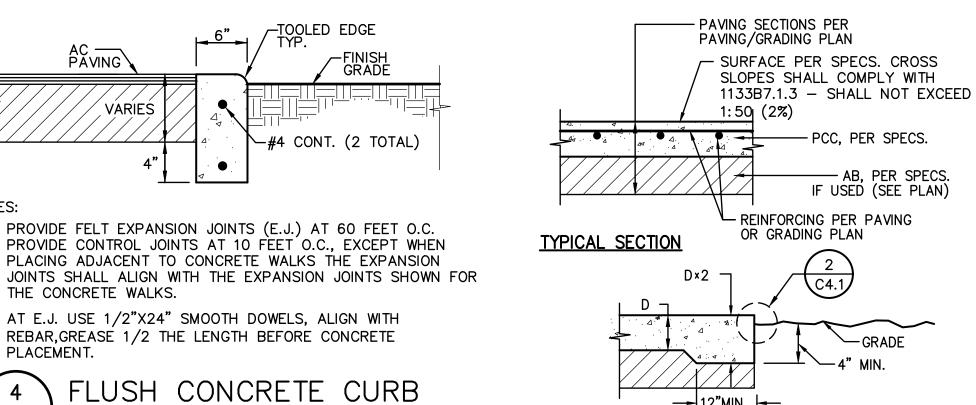


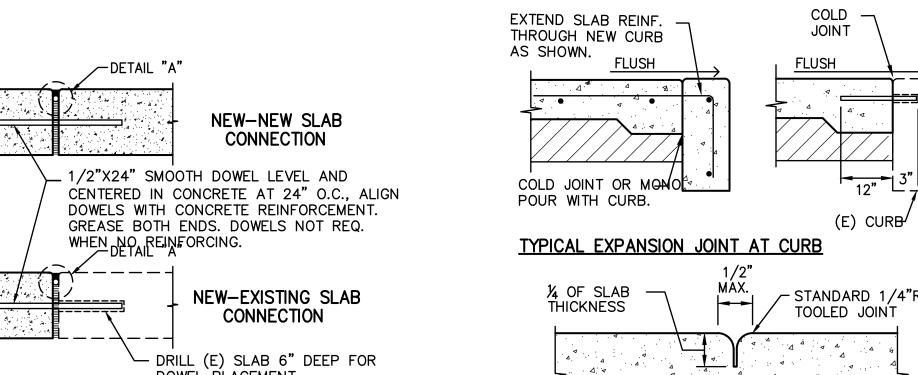




WALKWAY EDGE CURB

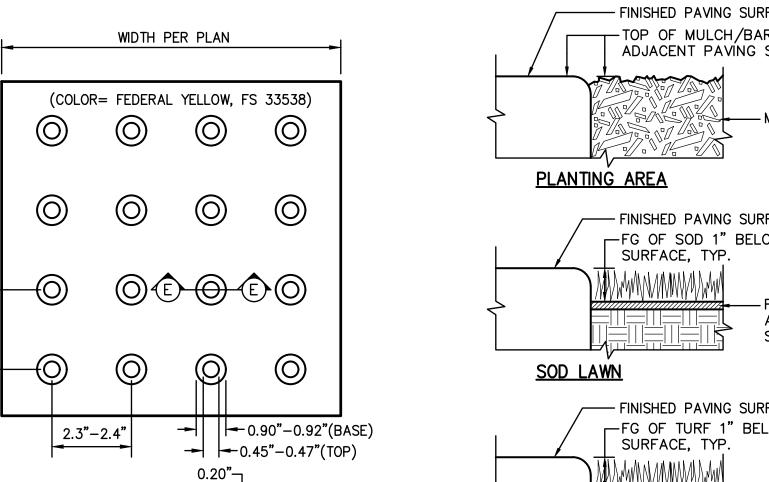

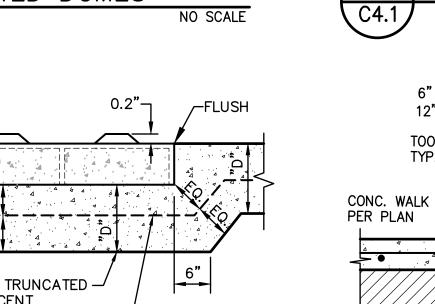

C4.1



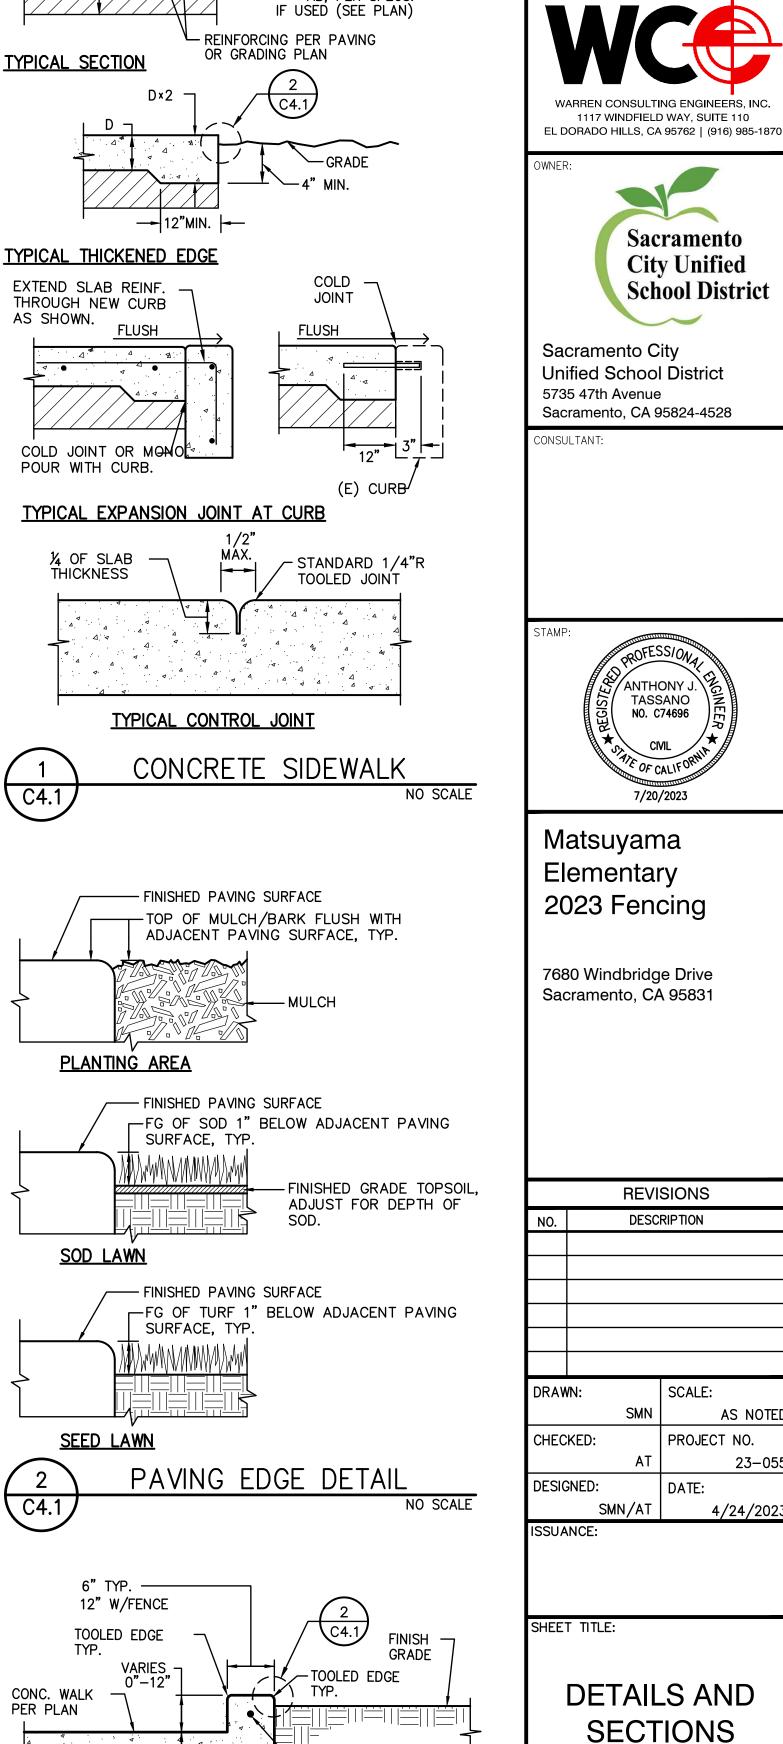


C4.1

SHEET NO.

AS NOTED

23-055

4/24/2023

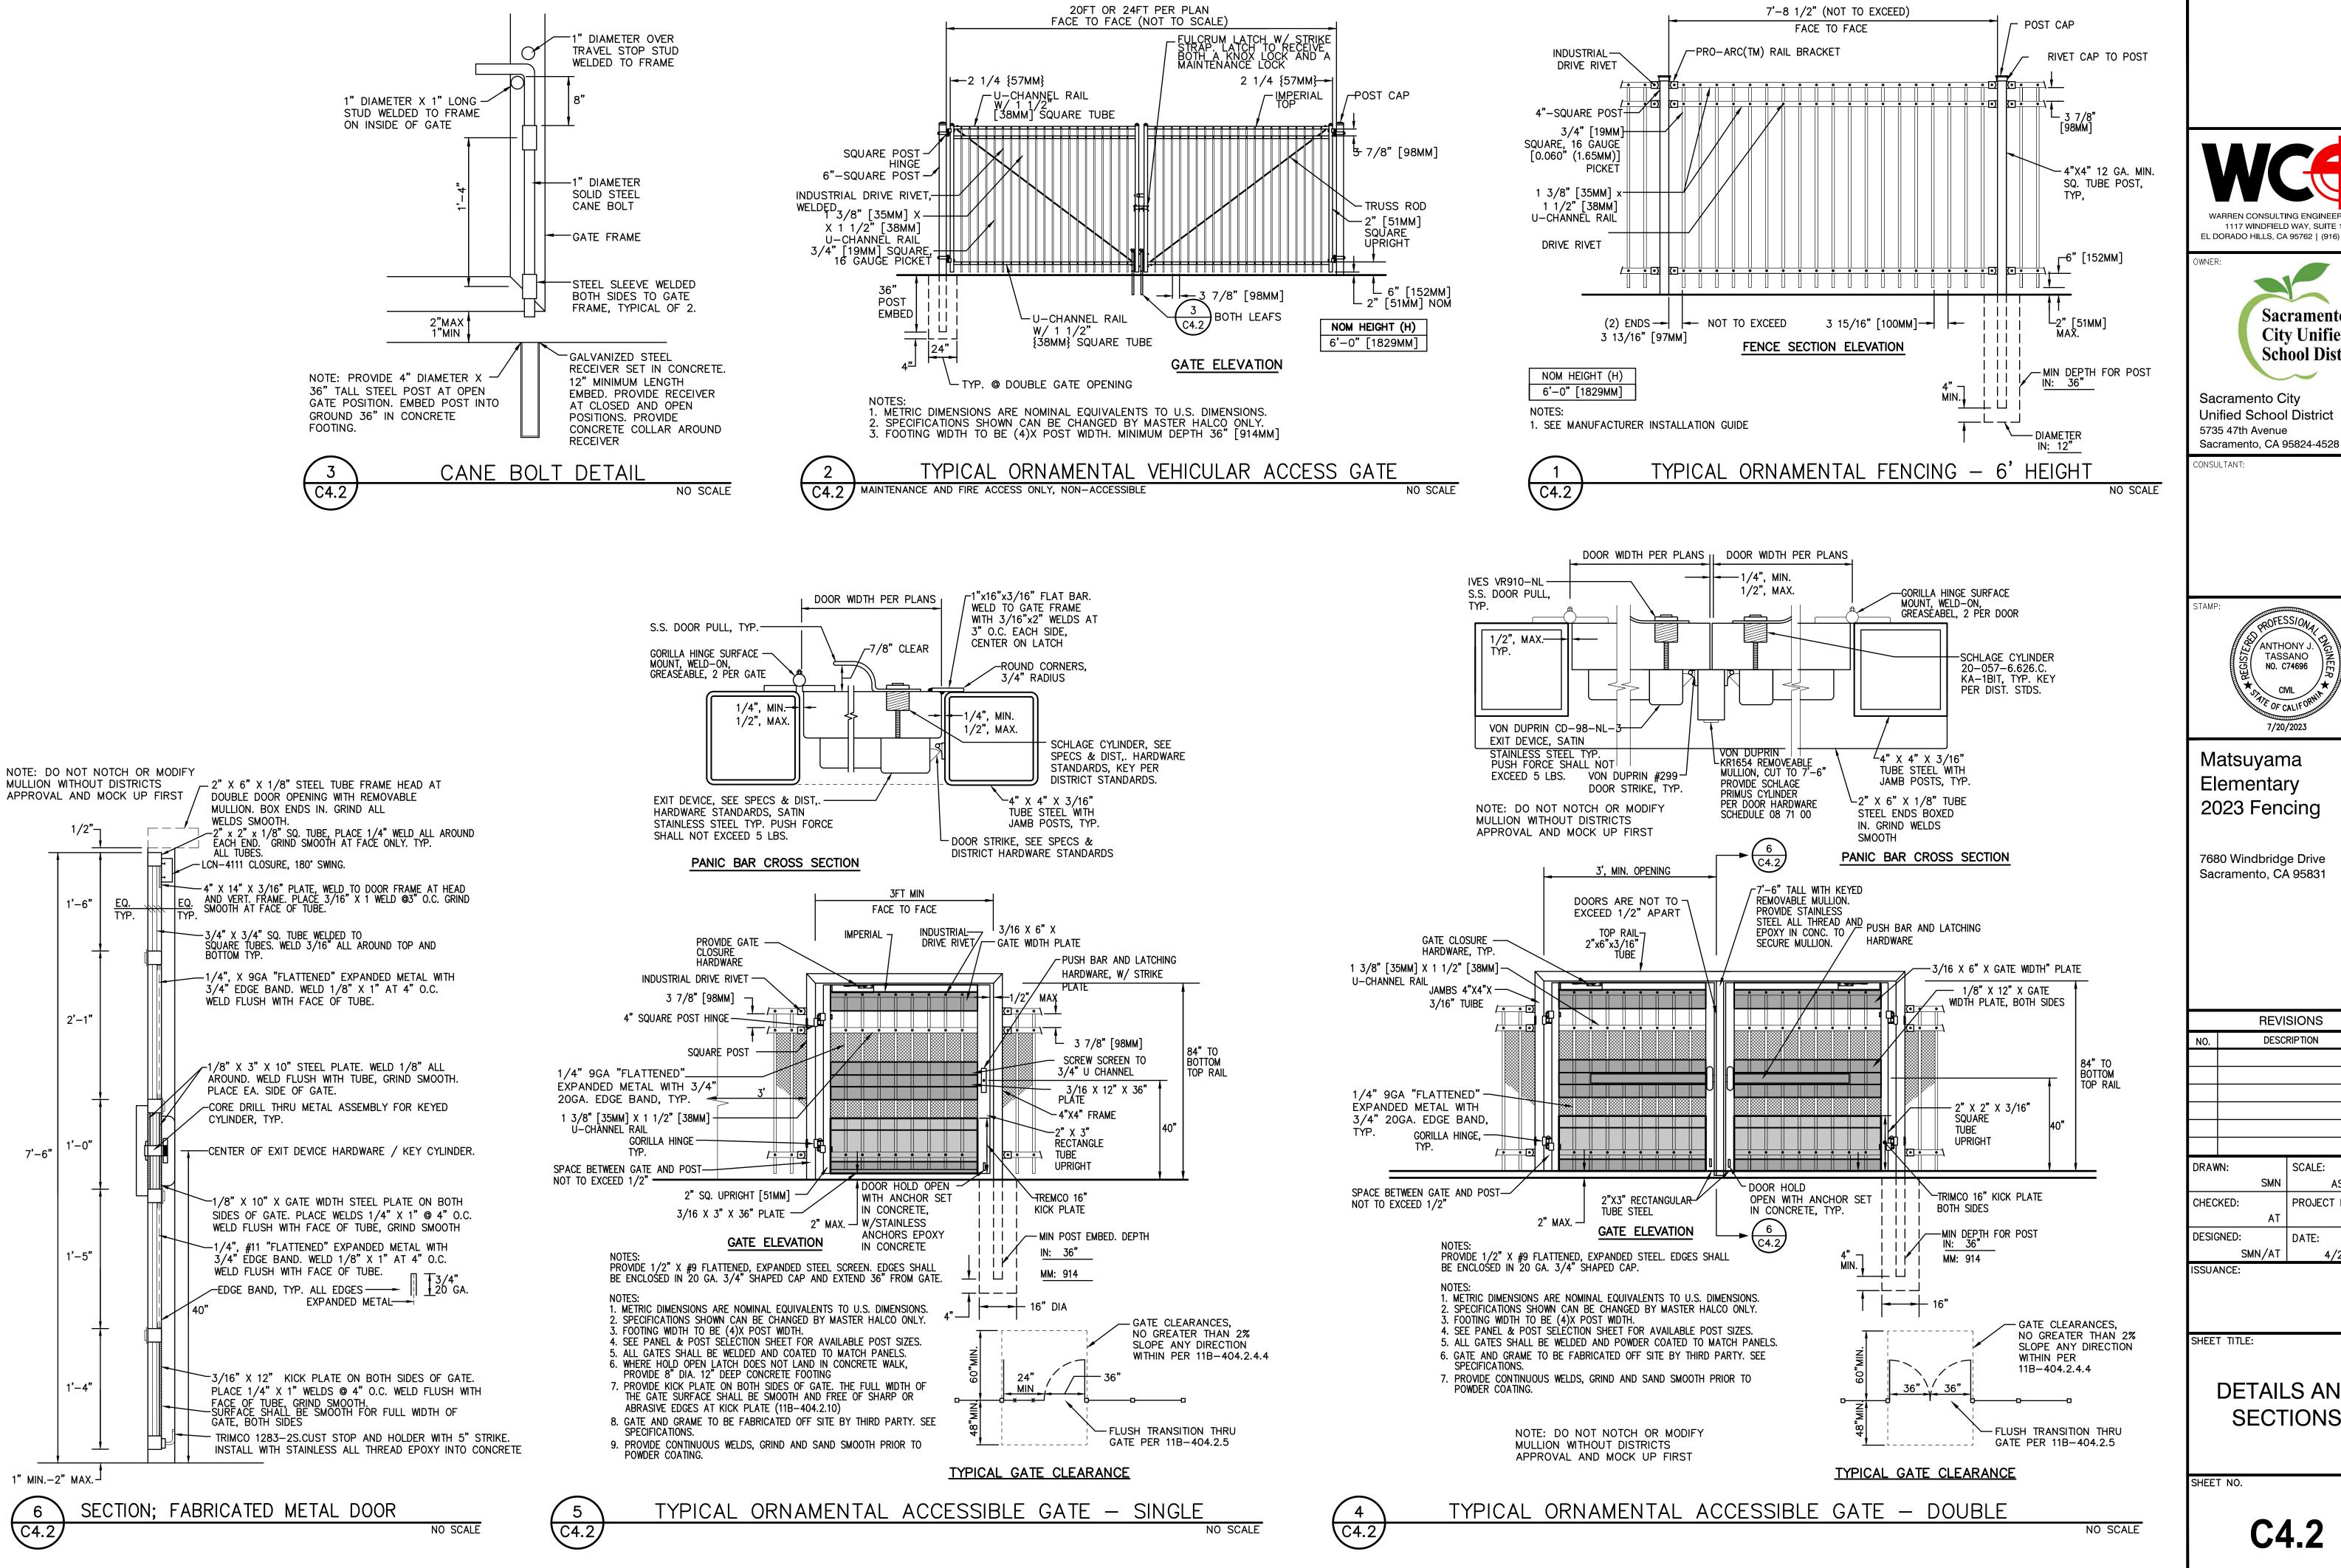

1117 WINDFIELD WAY, SUITE 110 EL DORADO HILLS, CA 95762 | (916) 985-1870

Sacramento **City Unified School District**

Sacramento City **Unified School District** 5735 47th Avenue

ONSULTANT:

ANTHONY J TASSANO NO. C74696 7/20/2023

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

> **REVISIONS** DESCRIPTION

SCALE: DRAWN: AS NOTED CHECKED: PROJECT NO.

23-055


DESIGNED: DATE: SMN/AT 4/24/2023 ISSUANCE:

SHEET TITLE:

DETAILS AND SECTIONS


SHEET NO.

C4.2

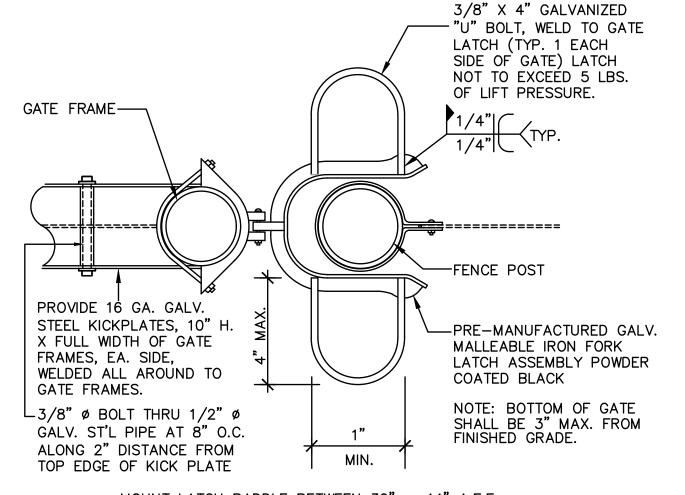

MOUNT LATCH PADDLE BETWEEN 30" - 44" A.F.F.



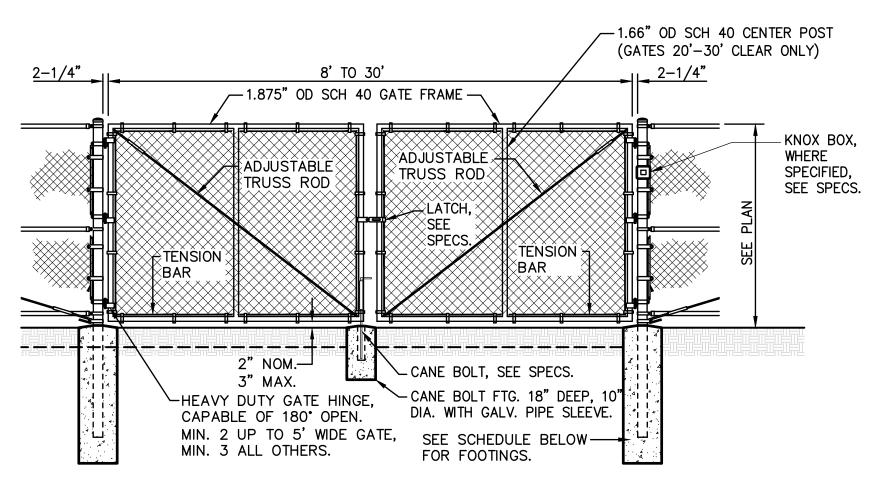

FENCES	ТО	9'	HEIGHT	
CATE PO	TZ	201	1EDI II E	Г


GATE POST	SCHEDULE			
POST DIA.	GATE LEAF	POST EMBED	DEPTH	DIA. (MIN)
4.0" OD	2'-4'	30"	36"	16"
4.0" OD	4.1'-9'	36"	42"	18"
4.0" OD	9.1'-12.5'	42"	48"	18"
6.0" OD	12.6'-18'	42"	48"	24"

	MESH SIZE	
	MATCH FENCE	
COATING:	YES	
COLOR:	BLACK	
TYPE:	FUSION BONDED	

FENCES TO	10'-12'	HEIGHT
-----------	---------	--------

GATE POST SCHEDULE				
POST DIA.	GATE LEAF	POST EMBED	DEPTH	DIA. (MIN
4.0" OD	2'-4'	30"	42"	16"
4.0" OD	4.1'-9'	42"	48"	18"
6.0" OD	9.1'-12.5'	42"	48"	24"
6.0" OD	12.6'-18'	48"	54"	24"

5	TYPICAL CHAIN LI	INK VEHICULAR	GATE
C4.3	NON-ACCESSIBLE VEHICULAR GATES ONLY		NO SCALE

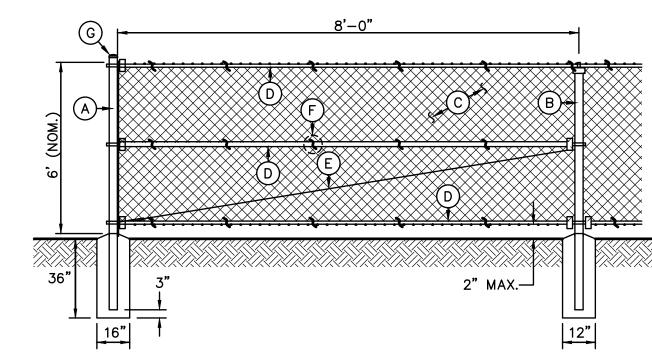

A - TERMINAL/CORNER - 4.0"OD SCH. 40 GALV. STEEL POST, POWDER COATED BLACK. B - LINE POST - 2.875"OD SCH. 40 GALV. STEEL POST, POWDER COATED BLACK.

C - 9 GA. CHAIN LINK FENCE. BLACK VINYL. MESH PER PLAN.

TYPE A - 1.75" MESH - GALV. FINISH.

TYPE B - 1.0" MESH - BLACK VINYL COATING

TYPE B - 1.0 MESH - BLACK VINYL COATING

TYPE C - 2.0" MESH - BLACK VINYL COATING

TYPE D 3.5" F" DIAMOND MESH WITH DRIVACY


TYPE D - 3.5"x5" DIAMOND MESH WITH PRIVACY SLATS D - 1.66" OD SCH. 40 GALV. STEEL RAILS, POWDER COATED BLACK. TOP AND BOTTOM ALL SECTIONS, MID AT ALL CORNER AND TERMINAL POSTS.

E-3/8" OD ADJUSTABLE INDUSTRIAL TRUSS ROD, POWDER COATED BLACK. F-9 GA. GALVANIZED STEEL TIES AT 12" OC HORIZ. AND VERT.

G - ALL CAPS AND FITTINGS HEAVY INDUSTRIAL GALV. GRADE, POWDER COATED BLACK.


6' TALL CHAIN LINK FENCING
C4.3 BLACK VINYL COATED

NO SCALE

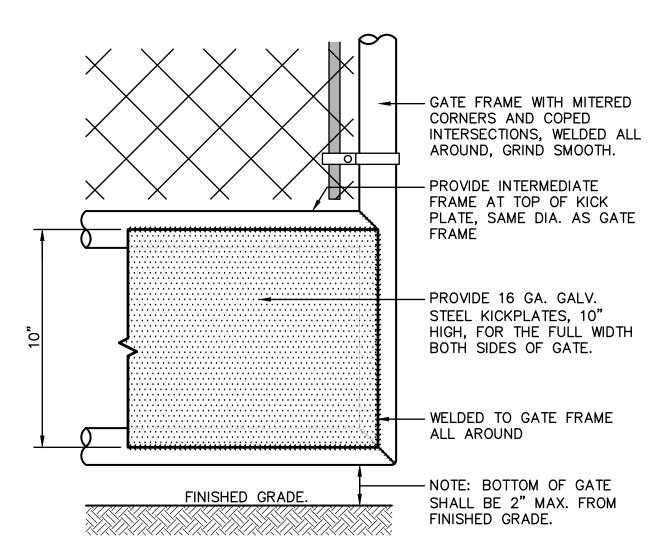

ACCESSIBLE KICKPLATE
C4.3

NO SCALE

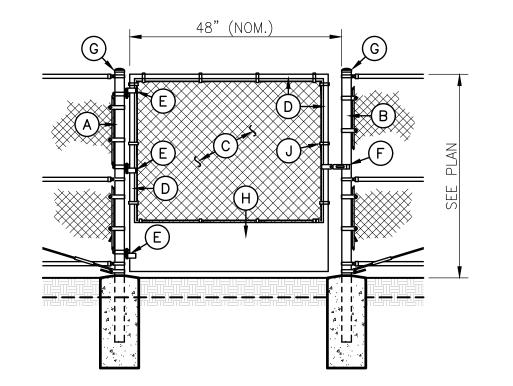

A. HINGE POST — 4.0"OD SCH. 40 GALV. STEEL POST, POWDER COATED BLACK.
B. LATCH POST — 4.0"OD SCH. 40 GALV. STEEL POST, POWDER COATED BLACK.
C. FABRIC TO MATCH ADJOINING FENCE.

D. 1.875" OD SCH. 40 WELDED GALV. STEEL FRAME, POWDER COATED BLACK. E. 180 DEGREE PRESSED STEEL INDUSTRIAL HINGE.

F. MALLEABLE IRON (LOCKABLE) GATE FORK LATCH, SEE 4/C4.3.
 G. ALL CAPS AND FITTINGS HEAVY INDUSTRIAL GALV. GRADE, POWDER COATED BLACK.

H. KICK PLATE PER 2/C4.3.

I. 5/16" OD ADJUSTABLE INDUSTRIAL TRUSS ROD.J. 9 GA. GALVANIZED WIRE TIES AT 12" OC HORIZ. AND VERT.

CHAIN LINK PEDESTRAIN GATE

C4.3 SINGLE SWING ACCESSIBLE NON-EGRESS GATE.

NO

WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95762 | (916) 985-1870

WNER:



Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:



Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS
. DESCRIPTION

DRAWN: SCALE:
SMN AS NOTED

CHECKED: PROJECT NO.
AT 23-055

DESIGNED: DATE:

4/24/2023

SMN/AT |


SHEET TITLE:


ISSUANCE:

DETAILS AND SECTIONS


SHEET NO.

C4.3

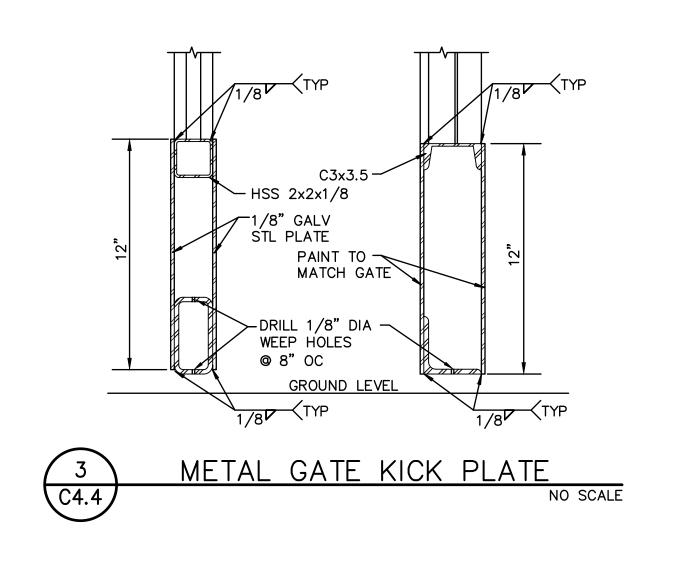

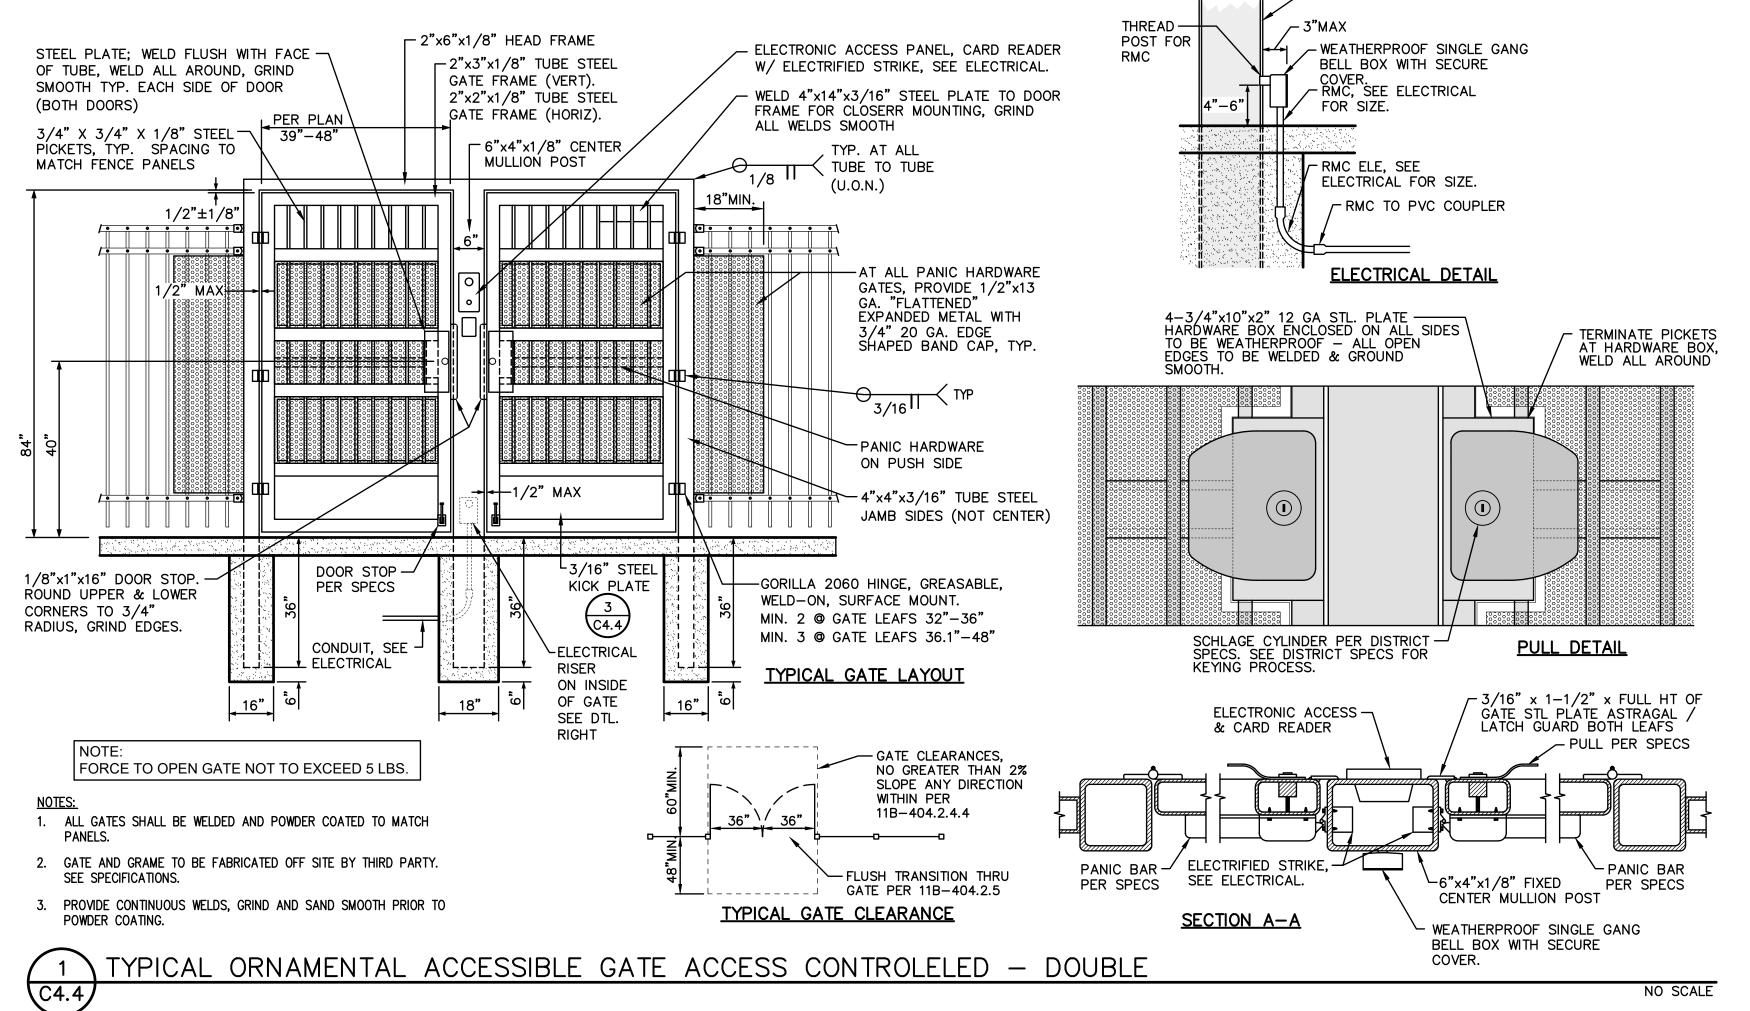

✓ GATE POST

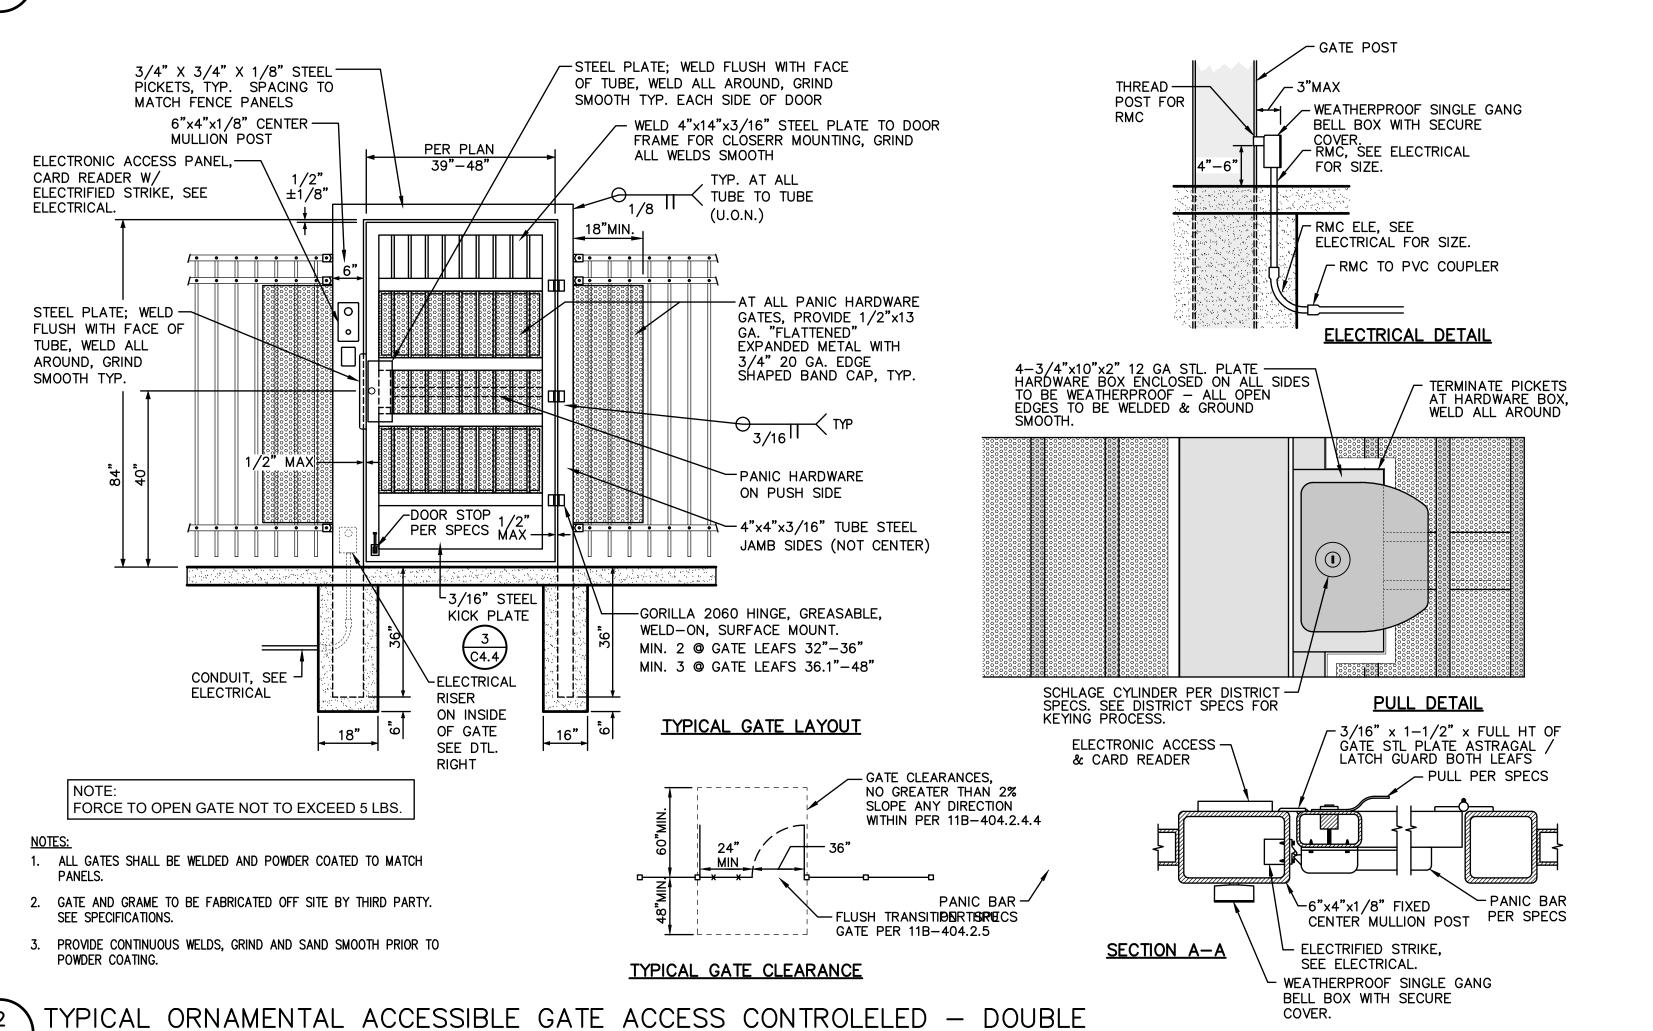

WARREN CONSULTING ENGINEERS, INC.
1117 WINDFIELD WAY, SUITE 110
EL DORADO HILLS, CA 95762 | (916) 985-1870

Sacramento
City Unified
School District

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:

ANTHONY J. TASSANO NO. C74696

CML

7/20/2023

Matsuyama Elementary 2023 Fencing

> 7680 Windbridge Drive Sacramento, CA 95831

> > REVISIONS
> >
> > DESCRIPTION

DRAWN: SCALE:
SMN AS NOTED

CHECKED: PROJECT NO.
AT 23-055

DESIGNED: DATE:

4/24/2023

ISSUANCE:

SMN/AT

SHEET TITLE:

DETAILS AND SECTIONS

SHEET NO.

NO SCALE

C4.4

ADDDEV/IATIONS:

ABBREVIATIONS:			
A AFF AFON AP BFF BICSI CATV CD CL CON (EMTLE ACP FTC GROPE IN APP BICSI CON APP BICSI C	AMPERE ABOVE FINISHED FLOOR ABOVE FINISHED GRADE ANNUNCIATOR ACCESS POINT BELOW FINISHED GRADE BUILDING INDUSTRY CONSTRUCTION SERVICE INTERNATION, BUILDING CONDUIT CABINET CATEGORY CABLE TELEVISION CANDELA CONTRACTOR FURNISHED/CONTRACTOR INSTALLED CENTER LINE CARBON MONOXIDE DOWN EXISTING ELECTRICAL METALLIC TUBING END OF LINE FIRE ALARM FIRE ALARM CONTROL PANEL FIRE TERMINAL CABINET GALVANIZED RIGID CONDUIT GROUND BOX INTRUSION ALARM CONTROL PANEL INTERMEDIATE DISTRIBUTION FRAME INTERMEDIATE DISTRIBUTION FRAME INTERMEDIATE DISTRIBUTION FRAME MINIMUM PONT OF ENTRY NEW NATIONAL FIRE PROTECTION ASSOCIATION NOT TO SCALE NOT APPLICABLE OWNER FURNISHED EQUIPMENT OWNER FURNISHED EQUIPMENT OWNER FURNISHED FOONTRACTOR INSTALLED OUTSIDE PLANT POLYVINYL CHLORIDE REGISTERED COMMUNICATION DISTRIBUTION DESIGNER RACEWAY ROOM SURFACE RACEWAY TYPICAL UNDERGROUND UNDERGWRIGHTERS LABORATORIES		
SR TYP UG	SURFACE RACEWAY TYPICAL UNDERGROUND		

TECHNOLOGY SYMBOL LEGEND: ALL EQUIPMENT AND MATERIALS ARE CONTRACTOR FURNISHED, INSTALLED AND CONFIGURED (UNO) NOTES / DETAIL DESCRIPTION MODEL NUMBER REFERENCES

SYMBOL

				1 (2) 2) (2)
MDF / IDF	DATA RACK / CABINET	EXISTING	EXISTING	N/A
J	SURFACE MOUNTED JUNCTION BOX	EXISTING	EXISTING	N/A
① H / ①	SURFACE MOUNTED 4-SQUARE JUNCTION BOX, WALL / CEILING	4" SQ.	N/A	GREY = EXISTING
	BACKBONE CONDUIT	EMT / GRC	3/4" & 1"	GREY = EXISTING
т	BACKBONE CONDUIT STUB	N/A	N/A	GREY = EXISTING
CON	ACCESS CONTROL MANAGEMENT EMBEDDED CONTROLLER	AVIGILON	AC-MER-CONT- LP1501	INSTALL AT MDF LOCATION
MRC	ACCESS CONTROL MANAGEMENT REMOTE CONTROLLER	AVIGILON	AC-MER-CONT- MR51E	INSTALL AT IDF LOCATION
CR	CARD READER	AVIGILON	AC-ING-READ- APTIQ-SNG-MT15	N/A
PSU	ACCESS CONTROL POWER SUPPLY UNIT W/BATTERY BACKUP	AVIGILON	AC-LSP-2DR- MER-LCK	INSTALL AT MDF & IDF LOCATIONS
EL	ELECTRONIC LATCH	VON DUPRIN	6300	N/A
VIC	VIDEO INTERCOM WITH SURFACE MOUNTED BACKBOX	AVIGILON	H4VI-RO1-IR, H4VI-MT-SURF1	N/A
SW	DATA NETWORK POE SWITCH WITH SFP SINGLE MODE TRANSCEIVER	EXISTING	EXISTING	N/A
	POWER SUPPLY	EXISTING	EXISTING	N/A
NVR	NETWORK VIDEO RECORDER	EXISTING	EXISTING	N/A
	RFID CARDS	SCHLAGE	8520	QUANTITY 100. SERIALIZED PER DISTRICT REQUIREMENTS.
TEL	ADMINISTRATIVE DESK PHONE SET	EXISTING	EXISTING	PROGRAM SOFT KEY AT (E) PHONE SET FOR GATE UNLOCK

PROJECT CODES AND STANDARDS:

PARTIAL LIST OF APPLICABLE CODES AND STANDARDS EFFECTIVE: JANUARY 1, 2023:

- 2022 CALIFORNIA ADMINISTRATIVE CODE (CAC), CCR, TITLE 24, PART 1
- 2022 CALIFORNIA BUILDING CODE (CBC), CCR, TITLE 24, PART 2 (2018 INTERNATIONAL BUILDING CODE WITH CALIFORNIA AMENDMENTS)
- 2022 CALIFORNIA ELECTRICAL CODE (CEC), CCR, TITLE 24, PART 3 (2017 NATIONAL ELECTRICAL CODE WITH CALIFORNIA AMENDMENTS) 2022 CALIFORNIA MECHANICAL CODE (CMC), CCR, TITLE 24, PART 4 (2018
- UNIFORM MECHANICAL CODE, WITH CALIFORNIA AMENDMENTS) 2022 CALIFORNIA ENERGY CODE, CCR, TITLE 24, PART 6 2022 CALIFORNIA FIRE CODE (CFC), CCR, TITLE 24, PART 9 (2018
- INTERNATIONAL FIRE CODE WITH CALIFORNIA AMENDMENTS) 2022 CALIFORNIA GREEN BUILDING STANDARDS CODE, CCR, TITLÉ 24,
- 2022 CALIFORNIA REFERENCED STANDARDS CODE, CCR, TITLE 24, PART
- 2022 NFPA 72: NATIONAL FIRE ALARM AND SIGNALING CODE, NATIONAL FIRE PROTECTION ASSOCIATION

SCOPE OF WORK:


- 1 FURNISH, INSTALL AND COORDINATE PROGRAMMING OF ELECTRONIC ACCESS CONTROLLER AND POWER SUPPLY/CABINET IN MDF. MODIFICATIONS TO ELECTRIC POWER TO BE MADE BY A LICENSED ELECTRICIAN.
- 2 FURNISH, INSTALL AND COORDINATE PROGRAMMING OF ELECTRONIC ACCESS REMOTE CONTROLLER AND POWER SUPPLY/CABINET IN IDF 1.07. MODIFICATIONS TO ELECTRIC POWER TO BE MADE BY A LICENSED ELECTRICIAN.
- 3 FURNISH AND INSTALL VIDEO INTERCOM, CARD READER, WIRING AND ELECTRONIC LATCH ON FRONT GATE MULLION (LATCH SIDE). SEE DETAIL 8/T900 FOR MORE INFORMATION.
- 4 FURNISH AND INSTALL CARD READER, WIRING AND ELECTRONIC LATCH ON EAST GATE MULLION (LATCH SIDE). SEE DETAIL 8/T900 FOR MORE INFORMATION.
- 5 FURNISH AND INSTALL 1" CONDUIT (PVC = UNDERGROUND, GRC = ABOVE GROUND) FROM (E) J-BOX TO CENTER OF GATE MULLION. SEE DETAIL 8/T900 FOR MORE INFORMATION.

SHEET INDEX:

SHEET NO.	DESCRIPTION
Т000	TECHNOLOGY COVER SHEET
T200	TECHNOLOGY FLOOR PLAN
T800	TECHNOLOGY DETAILS





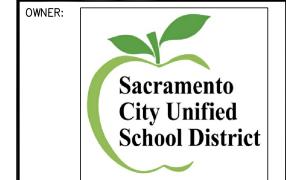

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528

CONSULTANT:





Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS	
DESCRIPTION	


DRAWN:	SCALE:	
SMN	AS NOTED	
CHECKED:	PROJECT NO.	
АТ	23-055	
DESIGNED:	DATE:	
SMN/AT	4/24/2023	

SSUANCE:

SHEET TITLE:

TECHNOLOGY **COVER SHEET**

SHEET NO.

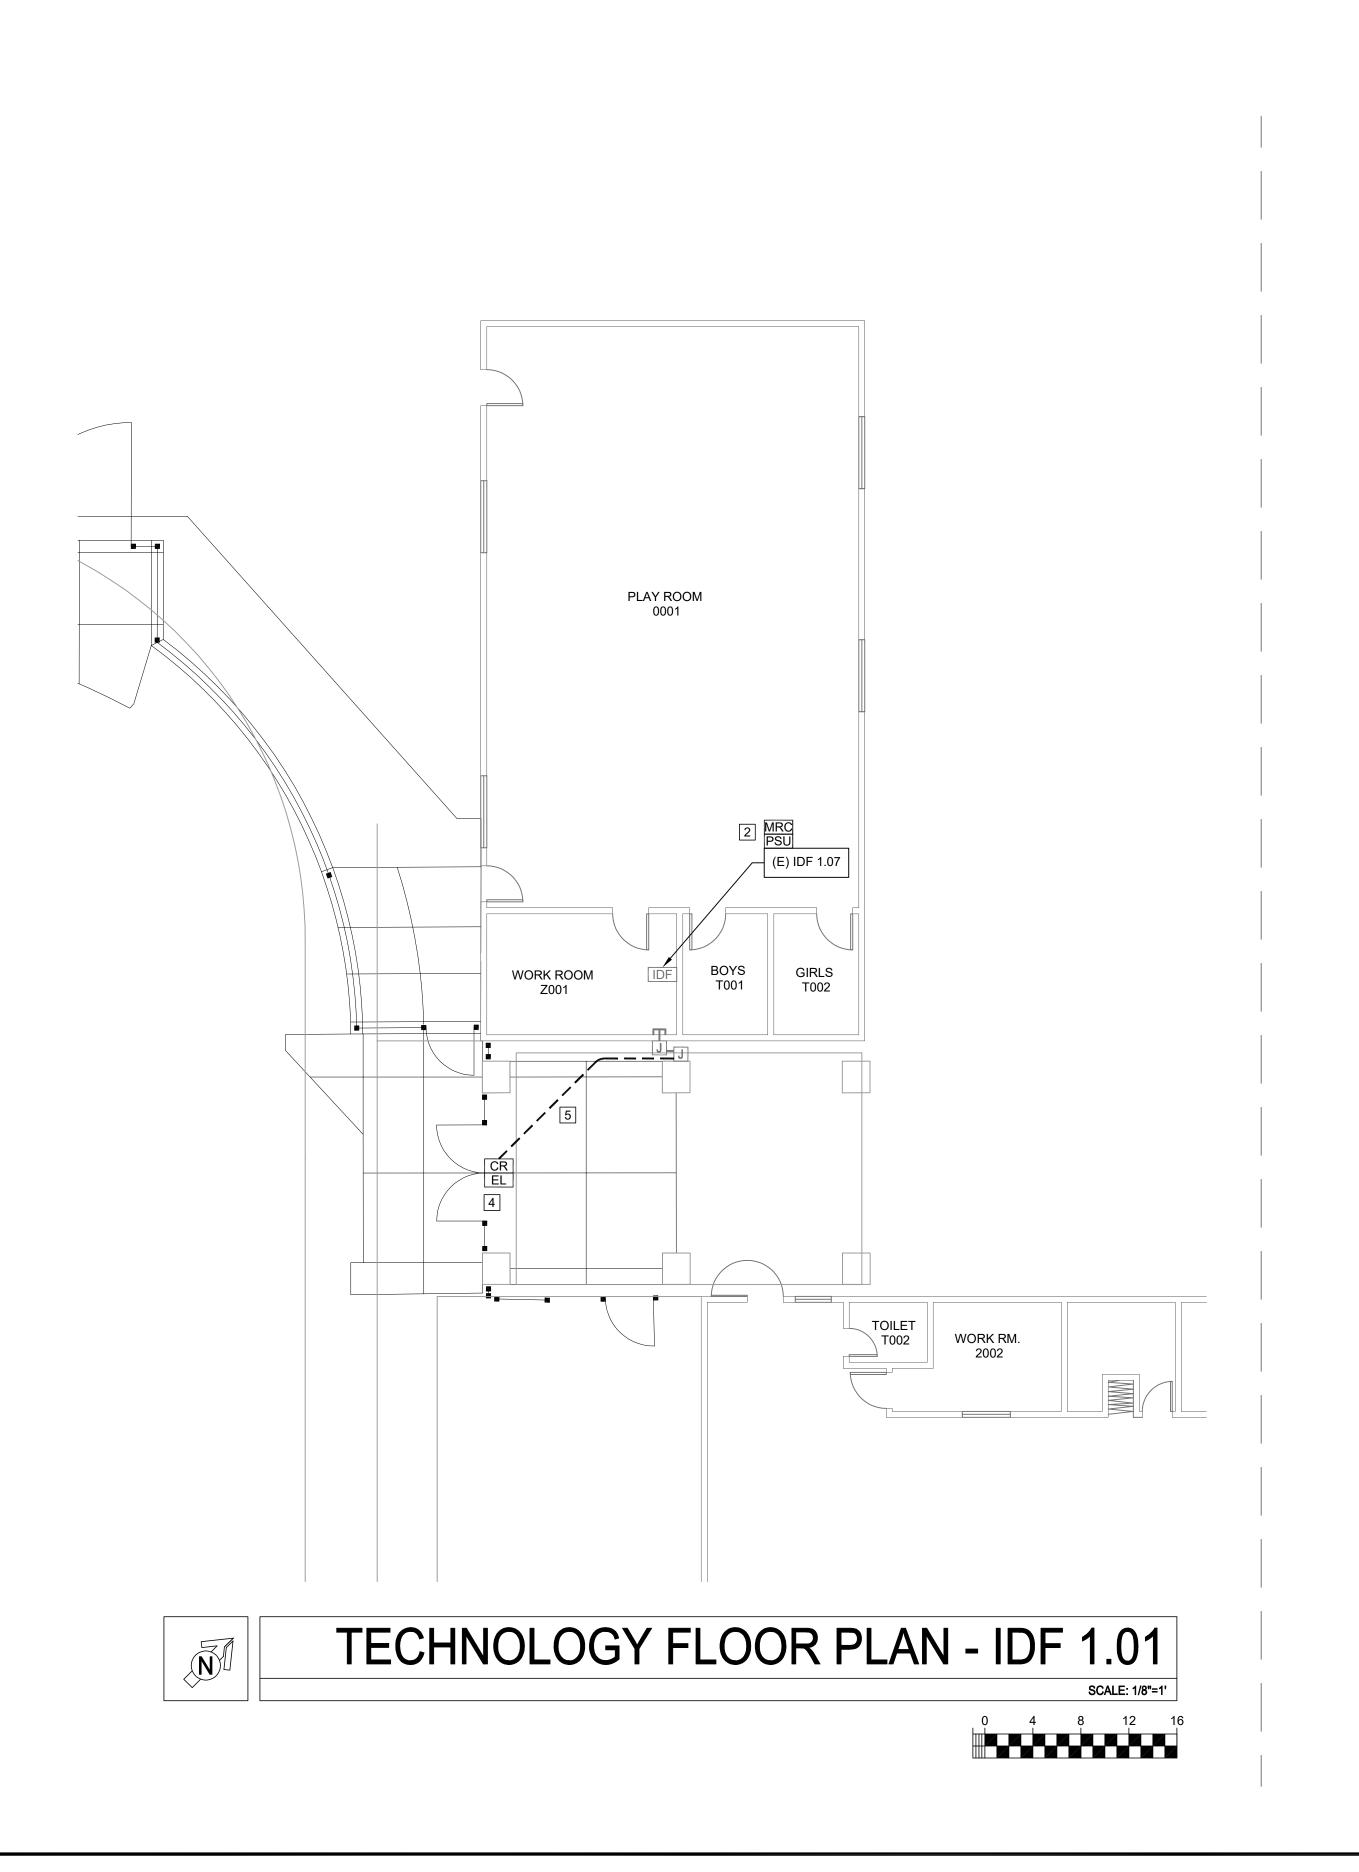



PROJECT GENERAL NOTES:

 ALL EXPOSED (N) CONDUIT AND (N) JUNCTION BOXES TO BE PRIMED AND PAINTED TO MATCH EXISTING SURROUNDINGS.

SHEET NOTES:


- TURNISH, INSTALL AND COORDINATE PROGRAMMING OF ELECTRONIC ACCESS CONTROLLER AND POWER SUPPLY/CABINET IN MDF. MODIFICATIONS TO ELECTRIC POWER TO BE MADE BY A LICENSED ELECTRICIAN.
- 2 FURNISH, INSTALL AND COORDINATE PROGRAMMING OF ELECTRONIC ACCESS REMOTE CONTROLLER AND POWER SUPPLY/CABINET IN IDF 1.07. MODIFICATIONS TO ELECTRIC POWER TO BE MADE BY A LICENSED ELECTRICIAN.
- 3 FURNISH AND INSTALL VIDEO INTERCOM, CARD READER, WIRING AND ELECTRONIC LATCH ON FRONT GATE MULLION (LATCH SIDE). SEE DETAIL 8/T900 FOR MORE INFORMATION.
- 4 FURNISH AND INSTALL CARD READER, WIRING AND ELECTRONIC LATCH ON EAST GATE MULLION (LATCH SIDE). SEE DETAIL 8/T900 FOR MORE INFORMATION.
- 5 FURNISH AND INSTALL 1" CONDUIT (PVC = UNDERGROUND, GRC = ABOVE GROUND) FROM (E) J-BOX TO CENTER OF GATE MULLION. SEE DETAIL 8/T900 FOR MORE INFORMATION.

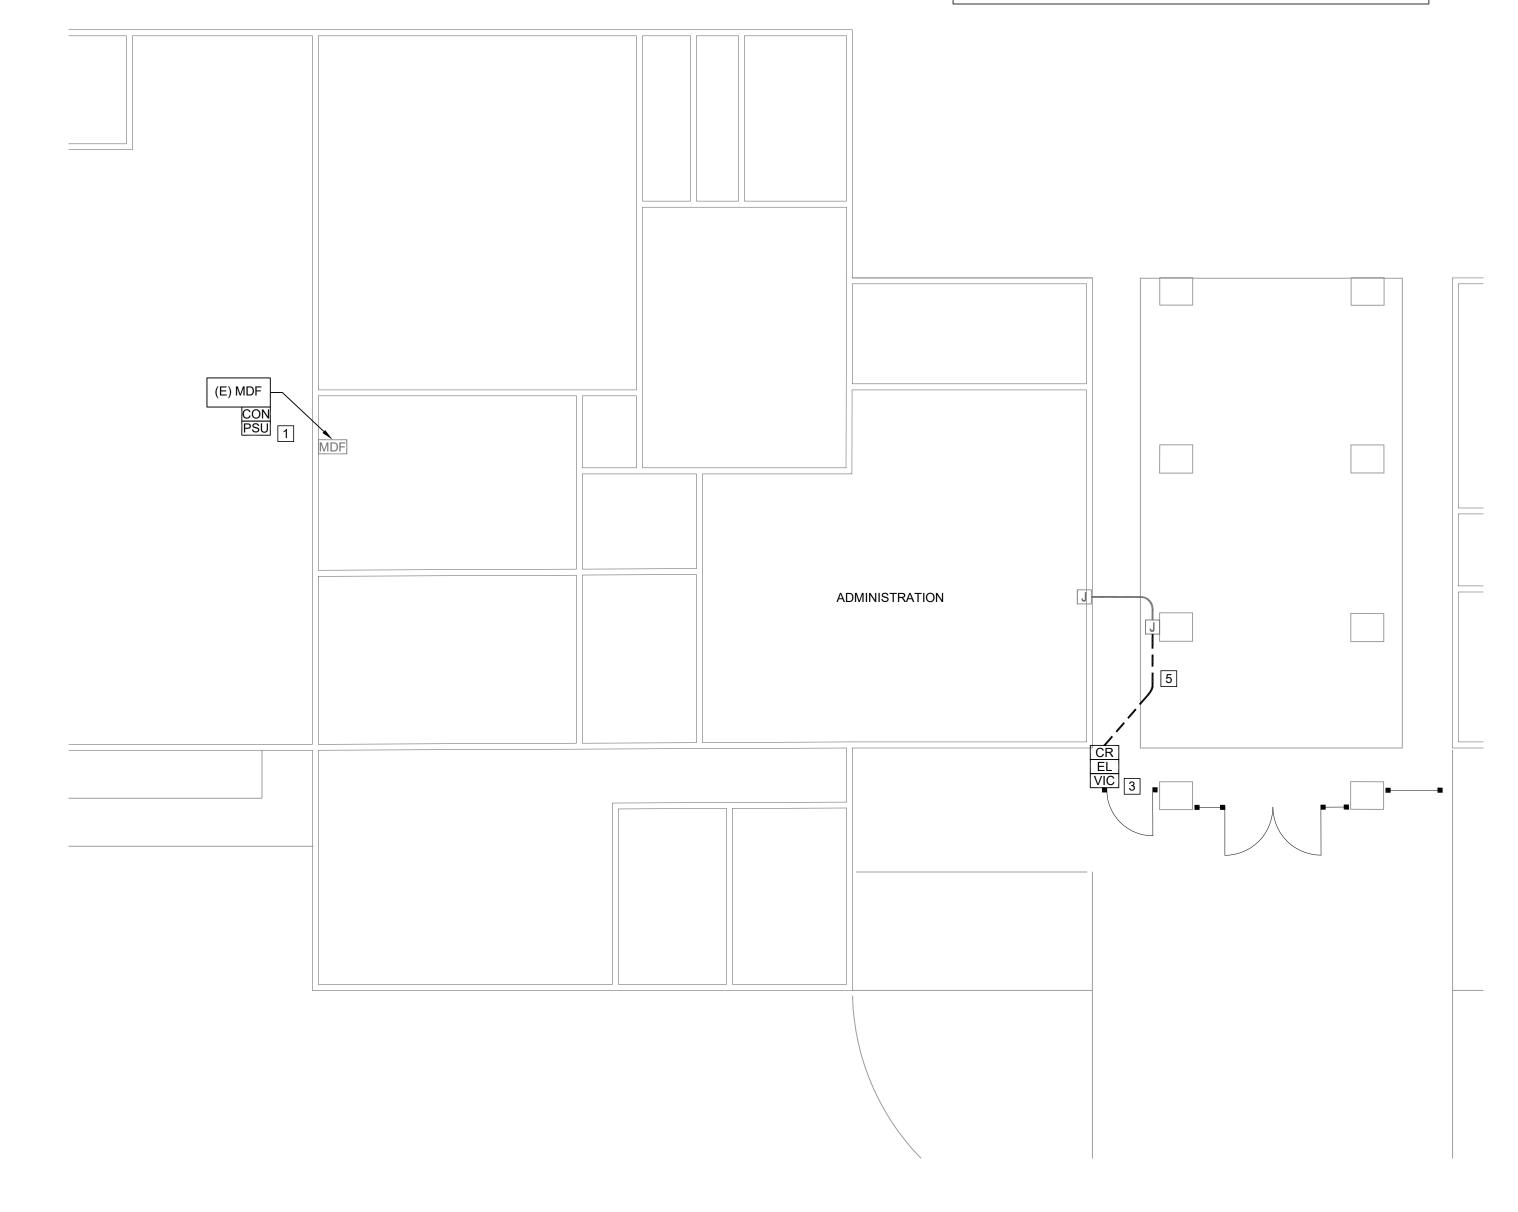



TECHNOLOGY FLOOR PLAN - MDF

SCALE: 1/8"=1'



WARREN CONSULTING ENGINEERS, INC. 1117 WINDFIELD WAY, SUITE 110

EL DORADO HILLS, CA 95762 | (916) 985-1870

NER:



Sacramento City
Unified School District
5735 47th Avenue
Sacramento, CA 95824-4528

NSULTANT:





Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

REVISIONS

DESCRIPTION

DRAWN: SCALE:
SMN AS NOTED
CHECKED: PROJECT NO.
AT 23-055
DESIGNED: DATE:


SMN/AT

SHEET TITLE

TECHNOLOGY FLOOR PLAN

SHEET NO.

T200

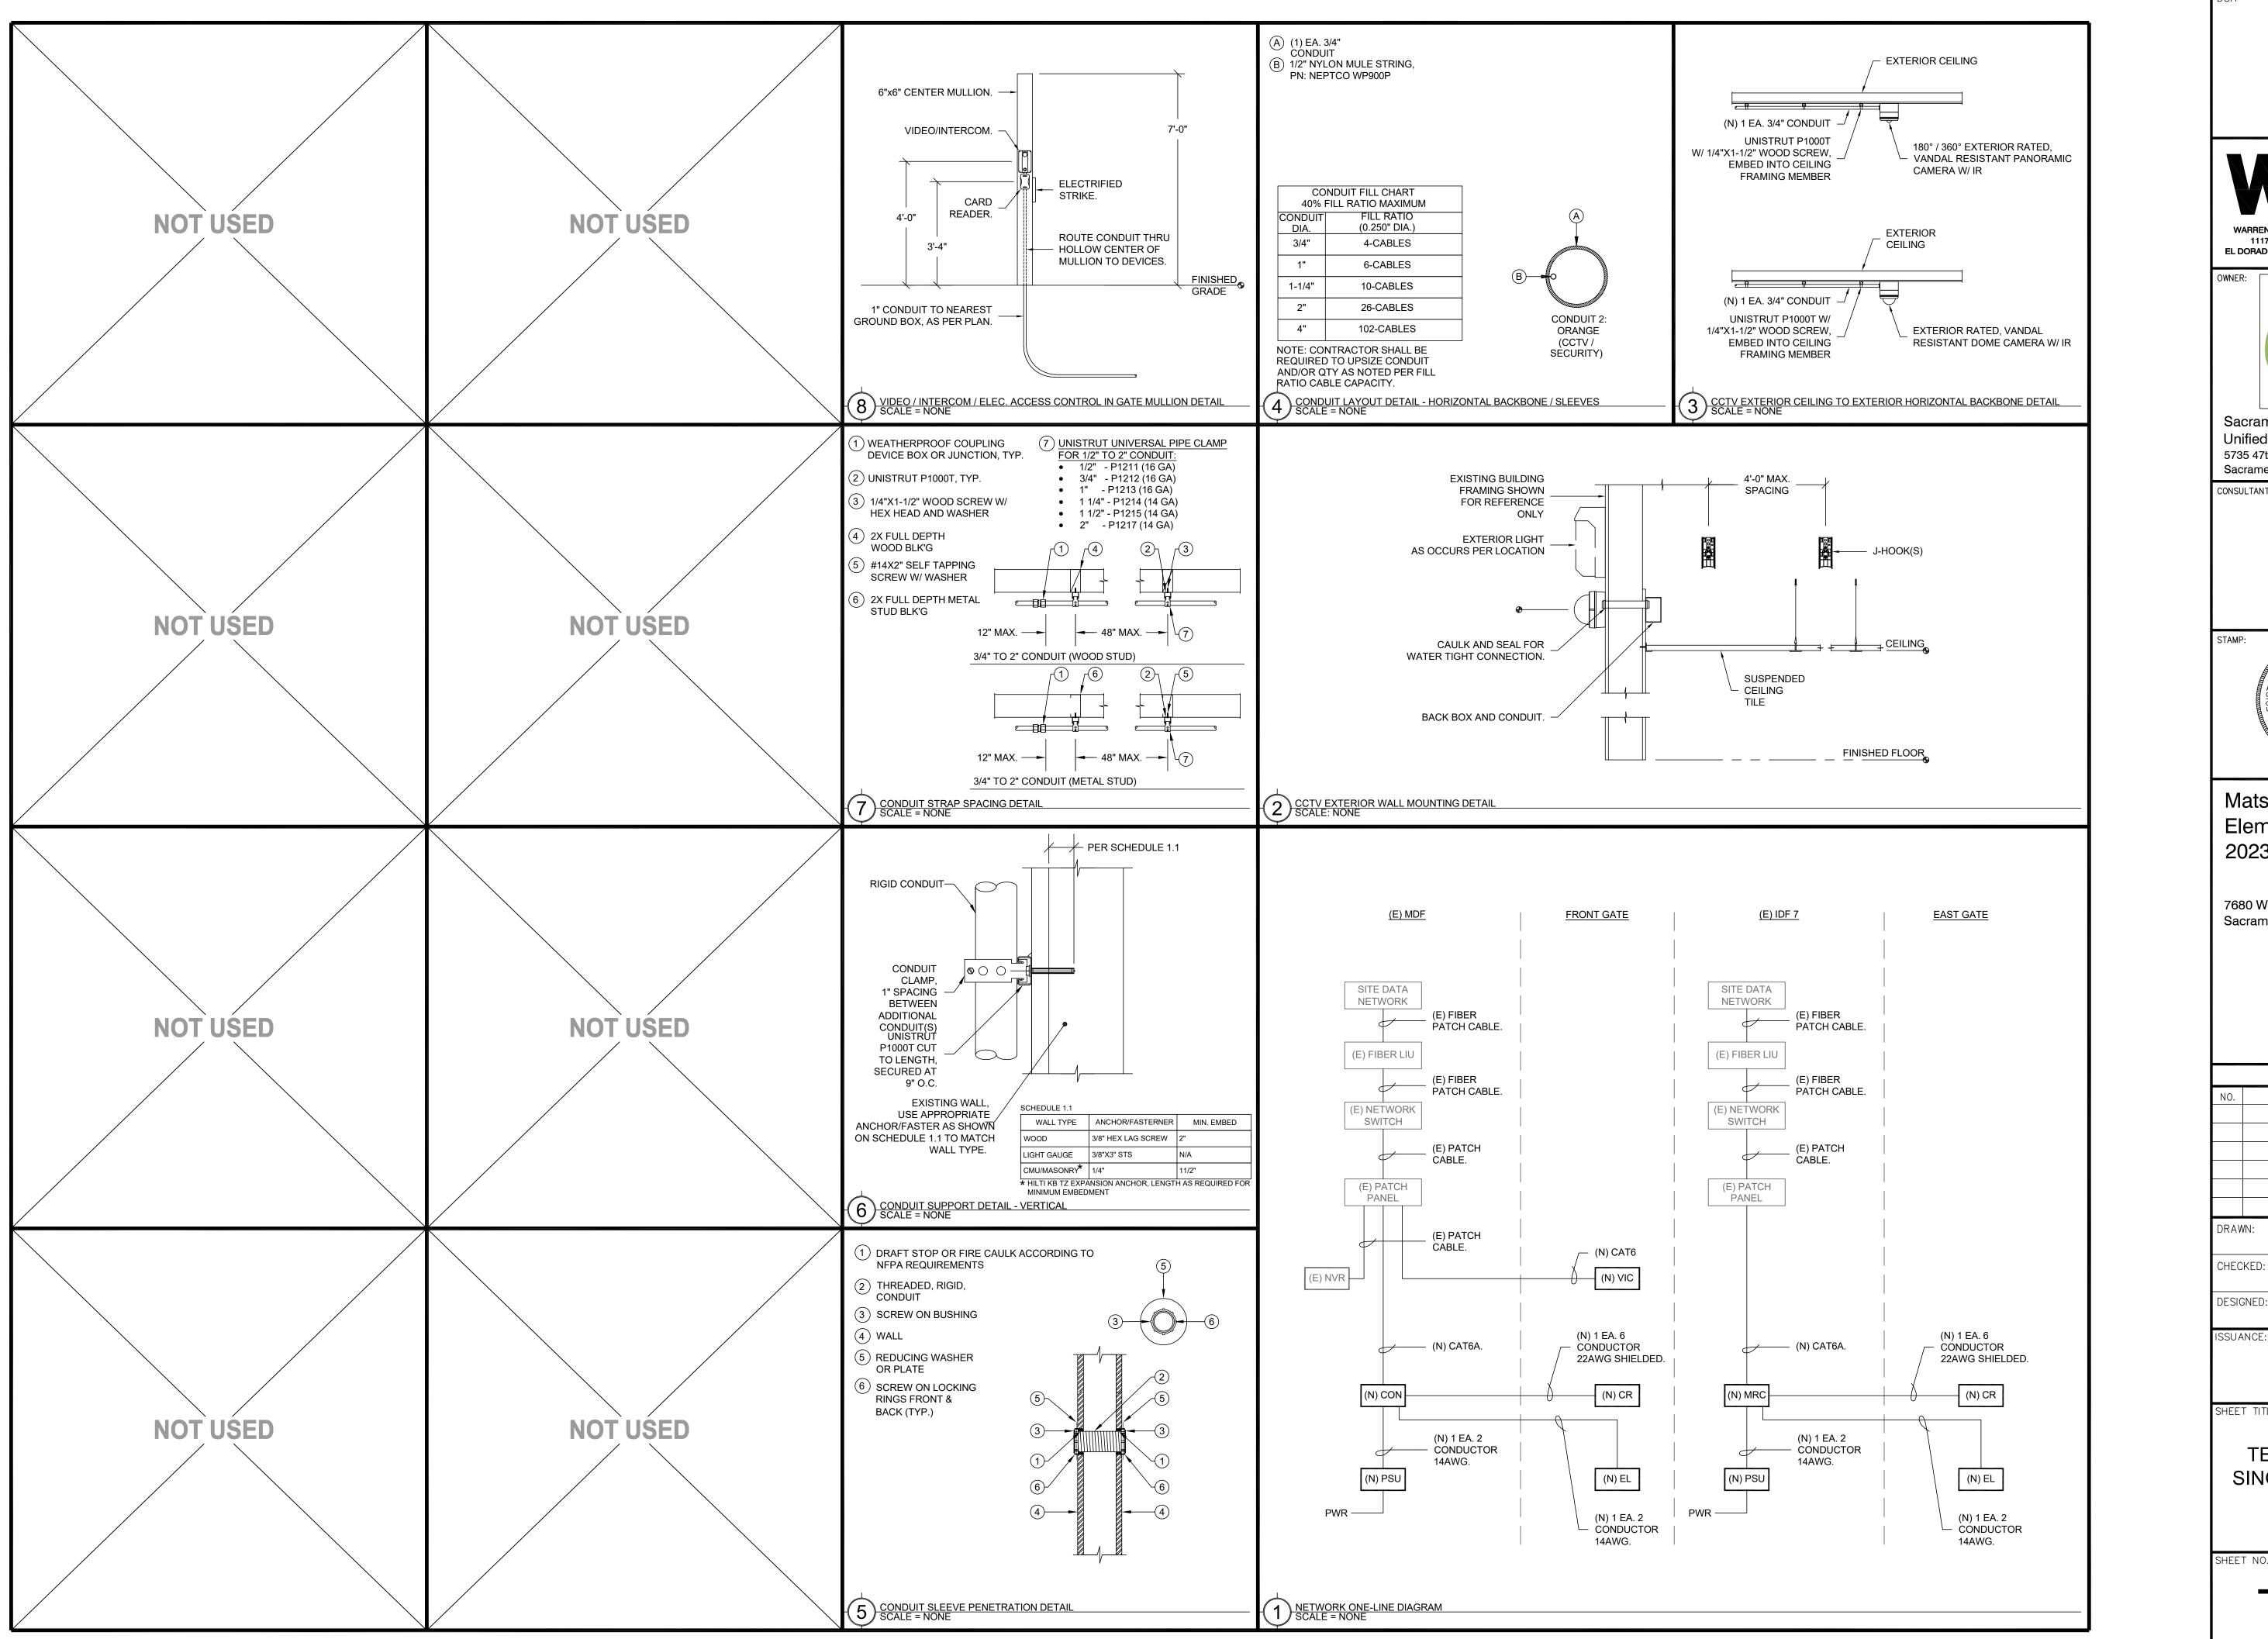

EL DORADO HILLS, CA 95762 | (916) 985-1870 Sacramento **City Unified School District**

1117 WINDFIELD WAY, SUITE 110

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824-4528



ANTHONY J. TASSANO NO. C74696 6/9/2023

Matsuyama Elementary 2023 Fencing

7680 Windbridge Drive Sacramento, CA 95831

> **REVISIONS** DESCRIPTION

ORAWN: SCALE: AS NOTE CHECKED: PROJECT NO. 23-05 ESIGNED: SMN/AT 4/24/202

SHEET TITLE:

TECHNOLOGY SINGLE LINE AND **DETAILS**

SHEET NO.

T900