



**Business Services
Contracts Office**

5735 47th Avenue • Sacramento, CA 95824
(916) 643-2464

*Rose Ramos, Chief Business Officer
Dan Sanchez, Manager, Purchasing Services*

ADDENDUM NO. 0C

Date: 05/11/2022

Issued by: Sacramento City Unified School District

**Project: Bid NO. 455-2B
Shade Structures at Various Sites Group 2B**

This addenda shall supersede the original Information, attachments, and specifications regarding Bid NO. **455-2B** where it adds to, deletes from, clarifies or otherwise modifies them. All other conditions and any previous addenda shall remain unchanged.

Part A – Bidding and Contract Requirements

AD0C.01 Refer to Division 0, Exhibit A – Site Logistics Plans:

Replace Placeholder Page with Exhibit A – Site Logistics Plans. Attachment AD0C.11.

AD0C.02 Refer to Division 0, Exhibit B – Report of Limited Hazardous Materials Surveys

REPLACE Placeholder Page with Exhibit B – Report of Limited Hazardous Materials Surveys. Attachment AD0C.12.

Part B – TECHNICAL REQUIREMENTS

(Not Used)

Part C - DRAWINGS

AD0C.03 Earl Warren ES DSA# 02-120000, Drawing Sheet E1.1 SITE PLAN – ELECTRICAL:

REVISE Drawing Sheet E1.1 SITE PLAN – ELECTRICAL per Attachment AD0C.13

- Conduit and gnd conductor scope and all applicable callouts revised.
- Keyed Note 4 revised
- Keyed Note 9 added

AD0C.04 Refer to Earl Warren ES DSA# 02-120000, Drawing Sheet E3.1 DETAILS:

REVISE Drawing Sheet E3.1 Details, per attachment AD0C.17.

- Detail 4, Conduit Stub in Post Detail revised:

Bid No, 455-2B
Shade Structures at Various Sites Group 2B
ADDENDUM NO. 0C

AD0C.05 Refer to Elder Creek ES DSA# 02-120002 Drawing Sheet E1.1 SITE PLAN – ELECTRICAL:

REVISE Drawing Sheet E1.1 SITE PLAN – ELECTRICAL per Attachment AD0C.14.

- Conduit and gnd conductor scope and all applicable callouts revised.
- Keyed Note 4 revised.
- Keyed Note 9 added.

AD0C.06 Refer to Elder Creek ES DSA# 02-120002 Drawing Sheet E3.1 DETAILS:

REVISE Drawing Sheet E3.1 Details, per attachment AD0C.17.

- Detail 4, Conduit Stub in Post Detail revised.

AD0C.07 Refer to Mark Twain ES DSA# 02-120006 Drawing Sheet E1.1 SITE PLAN – ELECTRICAL:

REVISE Drawing Sheet E1.1 SITE PLAN – ELECTRICAL per Attachment AD0C.15.

- Conduit and gnd conductor scope and all applicable callouts revised.
- Keyed Note 4 revised.
- Keyed Note 7 added.

AD0C.08 Refer to Mark Twain ES DSA# 02-120006 Drawing Sheet E3.1 DETAILS:

REVISE Drawing Sheet E3.1 Details, per attachment AD0C.17.

- Detail 4, Conduit Stub in Post Detail revised.

AD0C.09 Refer to Rosa Parks MS DSA# 02-120007 Drawing Sheet E1.1 SITE PLAN – ELECTRICAL:

REVISE Drawing Sheet E1.1 SITE PLAN – ELECTRICAL per Attachment AD0C.16.

- Conduit and gnd conductor scope and all applicable callouts revised.
- Keyed Note 4 revised.
- Keyed Note 7 revised.

AD0C.10 Refer to Rosa Parks MS DSA# 02-120007 Drawing E3.1 DETAILS:

REVISE Drawing Sheet E3.1 Details, per attachment AD0C.17.

- Detail 4, Conduit Stub in Post Detail revised.

Part D- BIDDERS QUESTIONS

(Not Used)

Bid No, 455-2B
Shade Structures at Various Sites Group 2B
ADDENDUM NO. 0C

List of Attachments:

- AD0C.11** Exhibit A – Site Logistics Plans (4 pages)
- AD0C.12** Exhibit B – Report of Limited Hazardous Materials Surveys (47 pages)
- AD0C.13** Earl Warren ES DSA# 02-120000, Site Plan and Keyed Notes (1 page)
- AD0C.14** Elder Creek ES DSA# 02-120002, Site Plan and Keyed Notes (1 page)
- AD0C.15** Mark Twain ES DSA# 02-120006, Site Plan and Keyed Notes (1 page)
- AD0C.16** Rosa Parks MS DSA# 02-120007, Site Plan and Keyed Notes (1 page)
- AD0C.17** Various Sites, Conduit Stub in Post Detail (1 page)

END OF ADDENDUM NO. 0C

Contractor to sign as acknowledgment of receipt and return with Bid:

Signature: _____ Date: _____

Company Name (please print) _____

Exhibit A - Site Logistics Plans (SLP)
Earl Warren Elementary School



SLP Scope of Work Notes:

1. Coordinate the shut-down of irrigation in Lay-Down/Storage Area w/ Construction Manager.
2. Place secured temporary fencing around entire Lay-Down/Storage & Shade Structure Area, & ADA POT area while site work is being done in the summer.
3. Once footings & anchor bolts are in, and prior to start of school, revise the temporary fencing to encapsulate just the footings/anchor bolts.
4. When Contractor returns to install Shade Structure in Fall – Revise Temporary Fencing to encapsulate entire shade structure & lay-down/storage areas.
5. During summer months the Public has access to this site. Contractor to consider this in their safety and security measures.

Elder Creek Middle School



SLP Scope of Work Notes:

1. Remove identified existing permanent fence and post as necessary for access to Project Area and reinstall when project complete.
2. Place secured temporary fencing around Lay-Down/Storage Area.
3. Coordinate the shut-down of irrigation in Shade Structure Area w/ Construction Manager.
4. Place secured temporary fencing around entire Shade Structure & ADA POT area while site work is being done in the summer.
5. Once footings & anchor bolts are in, and prior to start of school, temporary fencing can be revised to encapsulate just the footings/anchor bolts or summer phase fencing can remain.
6. When Contractor returns to install Shade Structure in Fall, temporary fencing to encapsulate entire shade structure & lay-down/storage area must be in place.
7. During summer months the Public has access to this site. Contractor to consider this in their safety and security measures.
8. Shade Structure Contractor will need to coordinate with Sac City Hired contractors doing irrigation scope in field to East of Shade Structure Area.
9. Shade Structure Contractor will need to coordinate with Sac City Hired contractors doing asphalt scope on playground North of the Shade Structure Area.

Mark Twain Elementary School



SLP Scope of Work Notes:

1. Place secured temporary fencing around Lay-Down/Storage Area.
2. Place secured temporary fencing around entire Shade Structure & ADA POT area while site work is being done in the summer.
3. Once footings & anchor bolts are in, and prior to start of school, revise the temporary fencing to encapsulate just footings/anchor bolts.
4. When Contractor returns to install Shade Structure in Fall, revise temporary fencing to encapsulate entire shade structure & laydown/storage areas.
5. During summer months the Public has access to this site. Contractor to consider this in their safety and security measures.

Rosa Parks Elementary School



SLP Scope of Work Notes:

1. Place secured temporary fencing around Lay-Down/Storage Area.
2. Coordinate the shut-down of irrigation in Lay-Down/Storage Area w/ Construction Manager.
3. Place secured temporary fencing around entire Shade Structure & ADA POT while site work is being done in the summer.
4. Once footings & anchor bolts are in, and prior to start of school, revise the temporary fencing to encapsulate just the footings/anchor bolts.
5. When Contractor returns to install Shade Structure in Fall, revise temporary fencing to encapsulate entire shade structure & laydown/storage areas.
6. During summer months school public has access to the site and school may be in session. Contractor to consider this in their safety and security measures.

**Asbestos and Lead Building
Inspection/Survey**

Attachment AD0C.12

Exhibit A - Exhibit B – Report of Limited Hazardous Materials Surveys

Shade Structure Group 2B

Disregard any language/data in this report NOT for Group 2B Schools

~~Caroline Wenzel Elementary School~~

Earl Warren Elementary School

Elder Creek Elementary School

~~John Still Elementary School~~

~~Leonardo Da Vinci K-8~~

Mark Twain Elementary School

Rosa Parks K-8

Restrooms

Presented to:

Mike Taxara

Facilities Project Technician

Sacramento City Unified School District

425 1st Avenue

Sacramento, CA 95818

Inspection Date:

May 06, 2022

Reviewed and submitted by:

Michael J. Lee

Certified Asbestos Consultant

Certified Lead Inspector/Assessor

Registered Environmental Property Assessor

Conducted by:

William Sager

Certified Asbestos Consultant

Certified Lead Inspector/Assessor

National Analytical Laboratories, Inc.

2201 Francisco Dr., Ste.140-261

El Dorado Hills, CA 95742

Office: (916) 361-0555 | Fax: (916) 361-0540

E-Mail: NAL1@NAL1.com | Web Page: www.NAL1.com



May 10, 2022

Mike Taxara
Facilities Project Technician
Sacramento City Unified School District
425 1st Avenue
Sacramento, CA 95818

RE: **Asbestos and Lead Building Inspection/Survey**
Group 2 – Restroom Inspections ~~7 Schools~~ 4 Schools
~~Caroline Wenzel Elementary School~~
Earl Warren Elementary School
Elder Creek Elementary School
~~John Still Elementary School~~
~~Leonardo Da Vinci K-8~~
Mark Twain Elementary School
Rosa Parks K-8
Sacramento, California

Dear Mr. Taxara,

The following report is regarding the building inspection conducted at the various sites listed above. **Of the seventy-nine (89) suspect asbestos-containing samples collected, none (0) were found to contain asbestos. One hundred-Sixty-eight (168) XRF shots were obtained to make a total of the fifty-six (56) suspected lead-containing areas tested, two (02) were found to contain lead-based material (LBM).** William Sager, Certified Asbestos Consultant, and Certified Lead Inspector/Assessor, working with National Analytical Laboratories, Inc. (N.A.L.), conducted the inspection on May 06, 2022.

SUMMARY OF FINDINGS -

The building inspection and analytical results indicate that trace material was present at Caroline Wenzel and the remaining sites had no asbestos present in the areas that are being renovated.

Based on the lead sample results, Ceramic Tile at Caroline Wenzel ~~and Rosa Parks K-8~~ were found to contain LBM levels above Cal-OSHA's Lead Action Level.

SECTION I: ASBESTOS INSPECTION -

The inspection was completed according to the EPA's Asbestos Containing Building Materials (ACBM) In-Schools Rule; 40 CFR 763.85 (Inspection and Re-Inspection). Currently, the EPA regulations classify ACBM as materials containing more than 1-percent (1%) of asbestos. Cal-OSHA currently regulates asbestos to 1/10th of 1% (0.1%) and requires a certified asbestos worker to conduct this work.

Breathe easy...

2201 Francisco Dr. Ste. 140-261 El Dorado Hills, CA 95762
916.361.0555 | Email: Service@nal1.com

Upon completing the visual inspection, the suspect asbestos bulk sample materials were collected under the EPA and Cal-OSHA protocol. They were placed into new plastic bags, sealed, and identified with unique identification numbers. The bulk samples were transported to the laboratory under a chain of custody protocol for analysis. MircoTest Laboratory, located in Rancho Cordova, CA, analyzed the bulk suspect asbestos-containing samples, utilizing the Polarized Light Microscopy (PLM) Method. National Voluntary Laboratory Accreditation Program (NVLAP), certification #200999-0, California Environmental Laboratory Accreditation Program (CAELAP), certification #2974, certifies MicroTest.

Minor destructive sampling was conducted during the site visit. In the event that demolition work reveals any unforeseen suspect materials or if any future renovation work is to be conducted in other areas at the site; the contractor shall cease all work and contact the building owner for further testing.

Not all the rooms or materials throughout the site were sampled. According to the results, the like materials that were not tested will be treated as homogeneous to the tested materials and will be considered asbestos or non-asbestos.

The location and results of the suspect sample found to contain ASBESTOS is as follows:

Caroline Wenzel ES

| Sample ID# | Material | Location | Category | Results |
|------------|--------------------------|---|----------|----------------------------|
| 6870-1A | Texture | Bldg. A, Boy's Restroom, Ceiling, N. Area | ACCM | PT CT 0.25% Chrysotile |
| 6870-1B | Texture | Bldg. A, Boy's Restroom, Ceiling, NE Area | ACCM | PT CT 0.25% Chrysotile |
| 6870-1C | Texture | Bldg. A, Boy's Restroom, Ceiling, SE Area | ACCM | PT CT 0.25% Chrysotile |
| 6870-1D | Texture | Bldg. A, Girl's Restroom, Ceiling, SE Area | ACCM | PT CT 0.25% Chrysotile |
| 6870-1E | Texture | Bldg. A, Girl's Restroom, Ceiling, E. Area | ACCM | PT CT 0.25% Chrysotile |
| 6870-1F | Texture | Bldg. A, Staff All-Gender Restroom, E. Wall | ACCM | PT CT 0.25% Chrysotile |
| 6870-1G | Texture | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | ACCM | PT CT 0.25% Chrysotile |
| 6870-2A | Sheetrock-Joint Compound | Bldg. A, Boy's Restroom, Ceiling, N. Area | ACCM | PT CT <0.25% Chrysotile |
| 6870-2B | Sheetrock-Joint Compound | Bldg. A, Girl's Restroom, Ceiling, E. Area | ACCM | PT CT <0.25% Chrysotile |
| 6870-2C | Sheetrock-Joint Compound | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | ACCM | PT CT <0.25% Chrysotile |

If = Linear Feet; ACCM is a Cal-OSHA definition for materials that post results <1%. RACM is a Cal-OSHA and EPA definition that defines material as >1% and can be crumbled with hand pressure.

Based on the regulatory requirements by the National Emission Standards for Hazardous Air Pollutants (NESHAP), Regulation 40 CFR, Part 61, Subpart M, the following must occur "If the asbestos content is less than 10 percent, verification shall be made using the point-counting method specified in Appendix A, Subpart F, 40 CFR Part 763, Section 1.7.2.4, Polarized Light Microscopy, Qualification of Asbestos Content."

The Sheetrock-Joint Compound and Texture sample found to contain a Trace, <1% amount of Chrysotile asbestos was re-analyzed utilizing the EPA 600/M4-82-020, Point Count Method to determine if the amount of asbestos is less than or greater than 1%. The sample results for the above materials were found to contain .25% and <0.25% asbestos. Based on



~~the results, the materials will be treated as Trace, <1% Chrysotile) asbestos-containing construction material (ACCM) as regulated by CAL-OSHA.~~

~~Although neither EPA nor Local County Air Quality regulates materials at <1% level, it falls under Cal-OSHA's jurisdiction regarding worker protection. Cal-OSHA regulates the material at 1/10th of 1% [8 CCR-1529 (r) (1) Asbestos Containing Construction Material (ACCM)].~~

~~Based on this, the work must be completed by a certified asbestos contractor. The CONTRACTOR shall be required to call the landfill to verify that they will accept the waste as general construction debris. If the landfill does not take the material as general construction debris, the material shall be REQUIRED to be disposed of as non-friable/non-hazardous material~~

The following samples were non-asbestos-containing materials:

Earl Warren ES

| Sample ID# | Material | Location | Results |
|------------|--------------------------|---|---------------|
| 5420-1A | Texture | Bldg. B, Girls Restroom, W. Wall | None Detected |
| 5420-1B | Texture | Bldg. B, Boy's Restroom, E. Wall | None Detected |
| 5420-1C | Texture | Bldg. B, Boy's Restroom, N. Wall | None Detected |
| 5420-2 | Sheetrock-Joint Compound | Bldg. B, Girl's Restroom, W. Wall | None Detected |
| 5420-3 | Grout | Bldg. B, Boy's Restroom, N. Wall, White (Same in all Restrooms for Both Bldgs.) | None Detected |
| 5420-4 | Grout | Bldg. B, Boy's Restroom, Floor, W. Area, Gray (Same in all Restrooms for Both Bldgs.) | None Detected |
| 5420-5 | Plaster | Bldg. A Staff Restroom, E. Wall | None Detected |
| 5420-6A | Texture | Bldg. A Staff Restroom, W. Wall | None Detected |
| 5420-6B | Texture | Bldg. A Staff Restroom, S. Wall | None Detected |
| 5420-6C | Texture | Bldg. A Staff Restroom, N. Wall | None Detected |
| 5420-7 | Sheetrock-Joint Compound | Bldg. A Staff Restroom, N. Wall | None Detected |

Caroline Wetzel

| Sample ID# | Material | Location | Results |
|------------|----------|---|---------------|
| 6870-3 | Grout | Bldg. A, Boy's Restroom, N. Wall, White | None Detected |
| 6870-4 | Grout | Bldg. A, Girl's Restroom, E. Wall, White | None Detected |
| 6870-5 | Grout | Bldg. A, Boy's Restroom, Floor, W. Area, Gray | None Detected |
| 6870-6 | Grout | Bldg. A, Girl's Restroom, Floor, W. Area, Gray | None Detected |
| 6870-7 | Grout | Bldg. A, Staff All-Gender Restroom, N. Wall, White | None Detected |
| 6870-8 | Grout | Bldg. A, Staff All-Gender Restroom, Floor, N. Area, White | None Detected |

Elder Creek ES

| Sample ID# | Material | Location | Results |
|------------|--------------------------|--|---------------|
| 7934-1A | Linoleum | Bldg. H, Boy's Restroom, Floor (Same in all 3 Restrooms) | None Detected |
| 7934-1B | Mastic | Bldg. H, Boy's Restroom, Floor (Same in all 3 Restrooms) | None Detected |
| 7934-2 | Sheetrock-Joint Compound | Bldg. H, Girl's Restroom, W. Wall, Above Drop Ceiling | None Detected |
| 7934-3 | Cove Base Mastic | Bldg. H, Girl's Restroom, E. Wall, Base | None Detected |

John Still ES

| Sample ID# | Material | Location | Results |
|------------|----------|----------|---------|
|------------|----------|----------|---------|



Asbestos and Lead Building Inspection/Survey**Group 2 – 7 School Restrooms**

May 10, 2022

Page 5 of 11

| | | | |
|---------|--------------------------|--|---------------|
| 2200-1A | Stucco | Restroom Bldg., Exterior Wall, NW Area | None Detected |
| 2200-1B | Stucco | Restroom Bldg., Exterior Wall, E. Area | None Detected |
| 2200-1C | Stucco | Restroom Bldg., Exterior Wall, SW Area | None Detected |
| 2200-2A | Texture | Restroom Bldg., Girl's Restroom, E. Wall | None Detected |
| 2200-2B | Texture | Restroom Bldg., Girl's Restroom, S. Wall | None Detected |
| 2200-2C | Texture | Restroom Bldg., Boy's Restroom, N. Wall | None Detected |
| 2200-3 | Sheetrock-Joint Compound | Restroom Bldg., Girl's Restroom, E. Wall | None Detected |
| 2200-4 | Grout | Restroom Bldg., Boy's Restroom, Floor, N. Area, Gray (Same in Girl's Restroom) | None Detected |
| 2200-5 | Grout | Restroom Bldg., Boy's Restroom, E. Wall, White (Same in Girl's Restroom) | None Detected |
| 2200-6A | Texture | Bldg. A, Men's Restroom, W. Wall, Light Switch | None Detected |
| 2200-6B | Texture | Bldg. A, Restroom Hallway, E. Wall, Outlet | None Detected |
| 2200-6C | Texture | Bldg. A, Restroom Hallway, W. Wall, Light Switch | None Detected |
| 2200-7 | Sheetrock-Joint Compound | Bldg. A, Restroom Hallway, W. Wall, Light Switch | None Detected |
| 2200-8 | Grout | Bldg. A, Women's Restroom, Floor, White (Same in Men's Restroom) | None Detected |

Leonardo Da Vinci K-8

| Sample ID# | Material | Location | Results |
|------------|----------|--|---------------|
| 4701-1 | Grout | Bldg. E, Handicap Restroom, N. Wall, White (Same in all 3 Restrooms) | None Detected |
| 4701-2 | Grout | Bldg. E, Handicap Restroom, Floor, S. Area, Gray (Same in all 3 Restrooms) | None Detected |

Mark Twain ES

| Sample ID# | Material | Location | Results |
|------------|----------|--|---------------|
| 4914-1 | Grout | Bldg. J, Women's Restroom, W. Wall, White (Same in All 4 Restrooms for Bldgs. J & G) | None Detected |
| 4914-2 | Grout | Bldg. J, Women's Restroom, Floor, S. Area, Gray (Same in All 4 Restrooms for Bldgs. J & G) | None Detected |

Rosa Parks K-8

| Sample ID# | Material | Location | Results |
|------------|------------|--|---------------|
| 2250-1 | Plaster | Bldg. E, Boy's Restroom, N. Wall | None Detected |
| 2250-1 | Plaster | Bldg. E, Boy's Restroom, E. Wall | None Detected |
| 2250-1 | Plaster | Bldg. E, Boy's Restroom, W. Wall | None Detected |
| 2250-2 | Grout | Bldg. E, Boy's Restroom, N. Wall, White | None Detected |
| 2250-3 | Grout | Bldg. E, Boy's Restroom, Floor, N. Area, Gray | None Detected |
| 2250-4 | Linoleum | Bldg. F, Staff All-Gender Restroom, Floor | None Detected |
| 2250-4 | Mastic | Bldg. F, Staff All-Gender Restroom, Floor | None Detected |
| 2250-5 | Sheetrock | Bldg. F, Staff All-Gender Restroom, W. Wall | None Detected |
| 2250-6 | FRP Mastic | Bldg. F, Staff All-Gender Restroom, S. Wall | None Detected |
| 2250-7 | Grout | Bldg. A, Girl's Restroom, S. Wall, White | None Detected |
| 2250-8 | Grout | Bldg. A, Girl's Restroom, Floor, N. Area, Gray | None Detected |
| 2250-9 | Concrete | Bldg. A, Girl's Restroom, S. Wall | None Detected |

ASBESTOS CONCLUSION -

No asbestos was detected in the above-listed samples/materials other than the trace requirements. Therefore, the contractor, their employees, or the sub-contractors, can



complete their work, in the specific areas tested, at the other sites without any health or safety concerns regarding the exposure to airborne asbestos fibers.

SECTION II: LEAD INSPECTION –

The lead suspect samples were collected according to the Housing Urban Development (HUD) Guidelines, the Environmental Protection Agency (EPA), and the California Public Health Department (formally DHS), which regulate and require the abatement or in-place management of LBP hazards equal to or greater than 1.0 milligram per square centimeter (1.0 mg/cm²) of lead by XRF analysis or more than 0.5% lead by weight by laboratory flame atomic absorption. The following regulation shall be adhered to because Cal-OSHA considers all surfaces to contain Lead: Cal-OSHA's 29 CFR 1926.62, California Occupational Safety and Health Standard, Title 8 (Cal-OSHA 8 CCR 1532.1).

Upon completing the visual inspection, suspect painted finishes or materials were sampled for potential lead content, following the EPA and Cal-OSHA protocol. They were labeled with unique identification numbers and analyzed using the Heuresis Pb200i Portable X-ray Fluorescent (XRF) analyzer. When the material is measured using XRF, each element present in the sample emits its own unique fluorescent x-ray energy spectrum. We can rapidly determine the material's lead content by simultaneously measuring the fluorescent x-rays emitted by the sample's different components.

Once the determination is made on where the LBM is located, the In-place Management or the Abatement of the LBM can commence. If the Abatement method of all surfaces is to be completed, then the debris must be bagged, or burrito wrapped before removing the debris from the work area(s) and subsequently the site. Because the samples listed below were found to contain LBM all areas where the LBM will be disturbed will require abatement, encapsulation, or prep work by a certified lead worker.

Therefore, the employer must ensure that the worker is adequately trained under Title 8 (Cal-OSHA 8 CCR 1532 (1) (2) and shall produce evidence that the worker is not being exposed above the Action Level (AL) or the Permissible Exposure Limit (PEL). Suppose no current data is readily available for the worker(s). In that case, the employer shall conclude that the worker is being exposed above the PEL; this SHALL trigger the employer to provide advanced training and certifications for the employees working with LBM.

Although not all the rooms or materials (non-suspect) were sampled, the like materials that were not tested and their results will be treated as homogeneous. The materials will be treated as containing LBM throughout the site.

The location and results of the suspect samples **found to be LBM** are as follows:

~~Caroline Wenzel ES~~

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm²) |
|-----------------------|---|----------------------|-------------------------------------|
| 6870-8L | Bldg. A, Girl's Restroom, Walls, White/Tan Tiles | Ceramic | 3.0 LBM |



Rosa Park K-8

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|---|-----------|----------------------------|
| 2250-2L | Bldg. E., Boy's Restroom, Walls, Blue Tiles | Ceramic | 7.1 |
| 2250-9L | Bldg. A, Girl's Restroom, Walls, Yellow Tiles | Ceramic | 6.3 |

Before the renovation/demolition work is completed or the transporting of the debris from the site, Health, and Safety Code 25157.8 (AB 2784 National Resources) requires that all lead debris be sampled for Waste Characterization. This will help the Contractor decide whether the material is to be considered Hazardous or Non-Hazardous Lead waste or general construction debris. The sequence of testing to be completed by the Contractor is as follows:

- Total Threshold Limit Concentration (TTLC) resulting from 50 mg/kg or more, but less than 1,000 mg/kg of lead must be retested using the Soluble Threshold Limit concentration (STLC) method.
- An STLC result of 5.0 mg/L or greater is considered California Hazardous Waste.
- Total Characteristic Leaching Procedure (TCLP) testing shall only be accomplished when approved by the Owners Representative; This procedure shall be generally reserved for out-of-state shipments, and A TCLP result of 5.0 mg/L or more deems the waste Federal RCRA materials; and
- The California hazardous waste threshold for total lead using STLC is 5 mg/L.

The following were **found to be less than (<) Cal-OSHA's Limit of Detection:**

Caroline Wenzel ES

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|---|-----------|----------------------------|
| 6870-1L | Bldg. A, Boy's Restroom, Ceiling, Tan Paint | Sheetrock | <LOD |
| 6870-2L | Bldg. A, Boy's Restroom, Walls, White Tiles | Ceramic | <LOD |
| 6870-3L | Bldg. A, Boy's Restroom, Walls, Tan Tiles | Ceramic | <LOD |
| 6870-4L | Bldg. A, Boy's Restroom, Walls, Brown Tiles | Ceramic | <LOD |
| 6870-5L | Bldg. A, Boy's Restroom, Baseboards, White Tiles | Ceramic | <LOD |
| 6870-6L | Bldg. A, Boy's Restroom, Floor, Brown Tiles | Ceramic | <LOD |
| 6870-7L | Bldg. A, Girl's Restroom, Ceiling, Tan Paint | Sheetrock | <LOD |
| 6870-9L | Bldg. A, Staff Restroom Corridor, Walls, Tan Paint | Sheetrock | <LOD |
| 6870-10L | Bldg. A, Staff Women's Restroom, Walls/Ceiling, Tan Paint | Sheetrock | <LOD |
| 6870-11L | Bldg. A, Staff Women's Restroom, Walls, White Tiles | Ceramic | <LOD |
| 6870-12L | Bldg. A, Staff Women's Restroom, Walls, Brown Tiles | Ceramic | <LOD |
| 6870-13L | Bldg. A, Staff Women's Restroom, Walls, Green Tiles | Ceramic | <LOD |
| 6870-14L | Bldg. A, Staff Women's Restroom, Floor, Tan Tiles | Ceramic | <LOD |



Asbestos and Lead Building Inspection/Survey**Group 2 – 7 School Restrooms**

May 10, 2022

Page 8 of 11

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--|-----------|----------------------------|
| 6870-15L | Bldg. A, Staff All-Gender Restroom, Walls/Ceiling, Tan Paint | Sheetrock | <LOD |
| 6870-16L | Bldg. A, Staff All-Gender Restroom, Walls, White Tiles | Ceramic | <LOD |
| 6870-17L | Bldg. A, Staff All-Gender Restroom, Walls, Brown Tiles | Ceramic | <LOD |
| 6870-18L | Bldg. A, Staff All-Gender Restroom, Walls, Green Tiles | Ceramic | <LOD |
| 6870-19L | Bldg. A, Staff All-Gender Restroom, Floor, Tan Tiles | Ceramic | <LOD |

Earl Warren ES

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--|-----------|----------------------------|
| 5420-1L | Bldg. B - Boy's & Girl's Restrooms, Walls, White Paint | Sheetrock | <LOD |
| 5420-2L | Bldg. B - Boy's & Girl's Restrooms, Walls, Blue/White Tiles | Ceramic | <LOD |
| 5420-3L | Bldg. B - Boy's & Girl's Restrooms, Doors, Frames & Trim, Blue Paint | Metal | <LOD |
| 5420-4L | Bldg. B - Boy's & Girl's Restrooms, Floors, Tan Tiles | Ceramic | <LOD |
| 5420-5L | Bldg. A - Staff Restroom, Walls, White Paint | Sheetrock | <LOD |
| 5420-6L | Bldg. A - Staff Restroom, Walls, White/Blue Tiles | Ceramic | <LOD |
| 5420-8L | Bldg. A - Staff Restroom, Floor, Tan Tiles | Ceramic | <LOD |

Elder Creek ES

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--------------------------------------|-----------|----------------------------|
| 7934-1L | Bldg. H, Exterior Walls, White Paint | Wood | <LOD |

John Still ES

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--|-----------|----------------------------|
| 2200-1L | Restroom Bldg., Boy's & Girl's Restrooms, Walls/Ceiling, Tan Paint | Sheetrock | <LOD |
| 2200-2L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, White Tiles | Ceramic | <LOD |
| 2200-3L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, Green Tiles | Ceramic | <LOD |
| 2200-4L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, Brown Tiles | Ceramic | <LOD |
| 2200-5L | Restroom Bldg., Boy's & Girl's Restrooms, Floors, Tan Tiles | Ceramic | <LOD |



Asbestos and Lead Building Inspection/Survey**Group 2 – 7 School Restrooms**

May 10, 2022

Page 9 of 11

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--|-----------|----------------------------|
| 2200-6L | Bldg. A, Men's & Women's Staff Restrooms, Walls/Ceiling, Tan Paint | Sheetrock | <LOD |
| 2200-7L | Bldg. A, Men's & Women's Staff Restrooms, Baseboards, White Tiles | Ceramic | <LOD |
| 2200-8L | Bldg. A, Men's & Women's Staff Restrooms, Floor, Tan Tiles | Ceramic | <LOD |

Leonardo Da Vinci K-8

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|---|-----------|----------------------------|
| 4701-1L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Walls, White Tiles | Ceramic | <LOD |
| 4701-2L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Walls, Purple Tiles | Ceramic | <LOD |
| 4701-3L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Doors, Frames & Trim, Yellow/Green Paint | Metal | <LOD |
| 4701-4L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Floors, Gray Tiles | Ceramic | <LOD |

Mark Twain ES

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|---|-----------|----------------------------|
| 4914-1L | Bldg. J, Women's & Men's Restrooms, Walls, White/Blue Tiles | Ceramic | <LOD |
| 4914-2L | Bldg. J, Women's & Men's Restrooms, Doors, Frame & Trim, Blue Paint | Metal | <LOD |
| 4914-3L | Bldg. J, Women's & Men's Restrooms, Floors, Tan Tiles | Ceramic | <LOD |
| 4914-4L | Bldg. G, Boy's & Girl's Restrooms, Walls, White/Blue Tiles | Ceramic | <LOD |
| 4914-5L | Bldg. G, Boy's & Girl's Restrooms, Doors, Frames & Trim, Blue Paint | Metal | <LOD |
| 4914-6L | Bldg. G, Boy's & Girl's Restrooms, Floors, Tan Tiles | Ceramic | <LOD |

Rosa Parks K-8

| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|---|-----------|----------------------------|
| 2250-1L | Bldg. E., Boy's Restroom, Walls, Ceiling, White Paint | Plaster | <LOD |



| Sample ID: | Sample Location Description | Structure | Lead (mg/cm ²) |
|------------|--|-----------|----------------------------|
| 2250-3L | Bldg. E., Boy's Restroom, Floor, Blue Tiles | Ceramic | <LOD |
| 2250-4L | Bldg. E., Boy's Restroom, Doors, Frames & Trim, Blue/White Paint | Metal | <LOD |
| 2250-5L | Bldg. F, Staff All-Gender Restroom, Ceiling, White Paint | Plaster | <LOD |
| 2250-6L | Bldg. F, Staff All-Gender Restroom, Walls (Behind FRP), White Paint | Wood | <LOD |
| 2250-7L | Bldg. F, Staff All-Gender Restroom, Doors, Frames & Trim, Blue Paint | Metal | <LOD |
| 2250-8L | Bldg. A, Girl's Restroom, Walls/Ceiling, White Paint | Concrete | <LOD |
| 2250-10L | Bldg. A, Girl's Restroom, Floor, Blue Tiles | Ceramic | <LOD |

LEAD RECOMMENDATION -

To stabilize the current lead conditions, N.A.L recommends Lead Certified CDPH Workers conduct in-place management work of the LBM surfaces/sample scheduled for renovation/demolition. Once the reduction, in-place management, or prep work is completed and the areas are stabilized, the existing surfaces/samples will be in good condition and not create a health or safety concern to the workers conducting the general construction work at the site.

ASSUMPTIONS AND LIMITATIONS -

The results, findings, conclusions, and recommendations expressed in this report are based only on conditions noted during N.A.L.'s inspection of the specific areas listed herein.

The selection of sample locations and sampling frequency was based on observations and the assumption that like materials in the same area are homogeneous in content. This report is not to be utilized as a bidding document or a project specification document since it does not have all the components required to serve as an Asbestos and Lead Abatement Project Design document or an Asbestos and Lead Abatement Work plan.

Our professional services have been performed, our findings obtained, and our conclusions and recommendations prepared following established principles and practices in environmental testing and consulting. This report does not warrant undiscovered hazards and locations not investigated.



Asbestos and Lead Building Inspection/Survey

Group 2 – 7 School Restrooms

May 10, 2022

Page 11 of 11

This report includes the laboratory analytical results, chain custody forms, and sample location maps. If you have any questions regarding this report or can be of further assistance, please get in touch with our office.

Reviewed and submitted by:



Michael J. Lee
Certified Asbestos Consultant
DOSH# 06-4047
Certified Lead Inspector/Assessor
LRC-00007541
Registered Environmental Property Assessor
REPA# 716352750

Conducted by:



William Sager
Certified Asbestos Consultant
DOSH# 19-6692
Certified Lead Inspector/Assessor
CDPH# 27087





MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID
MT012219558

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 8:00 AM

JOB SITE INFORMATION

Sampler William Sager
Project Caroline Wenzel Elementary School Property
Address 6870 Greenhaven Drive
 Sacramento, CA 95831

MicroTest Laboratories

Analytical Data

**POLARIZED LIGHT MICROSCOPY (PLM) - 400 Point Count
 EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763**

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|---|------------------------------------|---------------------------------|------------------------|
| 6870-1A | 19558-1 | Bldg. A, Boys Restroom, Ceiling, N. Area | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-1B | 19558-2 | Bldg. A, Boys Restroom, Ceiling, NE Area | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-1C | 19558-3 | Bldg. A, Boys Restroom, Ceiling, SE Area | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-1D | 19558-4 | Bldg. A, Girls Restroom, Ceiling, SE Area | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-1E | 19558-5 | Bldg. A, Girls Restroom, Ceiling, E. Area | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-1F | 19558-6 | Bldg. A, Staff All-Gender Restroom, E. Wall | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |

Report
Date Monday, May 09, 2022

Samples Received: 16
Samples Analyzed: 16

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219558

| | | | | | |
|---------|----------|--|---|------------------------------|-------------------|
| 6870-1C | 19558-7 | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | Tan Texture Non-Fibrous Homogenous | 99+% Binder | 0.25% Chrysotile |
| 6870-2A | 19558-8 | Bldg. A, Boys Restroom, Ceiling, N. Area | Tan Sheetrock-Joint Compound Fibrous Heterogenous | 10% Cellulose 89+% Binder | <0.25% Chrysotile |
| 6870-2B | 19558-9 | Bldg. A, Girls Restroom, Ceiling, E. Area | Tan Sheetrock-Joint Compound Fibrous Heterogenous | 10% Cellulose 89+% Binder | <0.25% Chrysotile |
| 6870-2C | 19558-10 | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | Tan Sheetrock-Joint Compound Fibrous Heterogenous | 10% Cellulose 89+% Binder | <0.25% Chrysotile |
| 6870-3 | 19558-11 | Bldg. A, Boys Restroom, N. Wall, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 6870-4 | 19558-12 | Bldg. A, Girls Restroom, E. Wall, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 6870-5 | 19558-13 | Bldg. A, Boys Restroom, Floor, W. Area, Gray | Black Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 6870-6 | 19558-14 | Bldg. A, Girls Restroom, Floor, W. Area, Gray | Black Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 6870-7 | 19558-15 | Bldg. A, Staff All-Gender Restroom, N. Wall, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 6870-8 | 19558-16 | Bldg. A, Staff All-Gender Restroom, Floor, N. Area, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |

Report
Date Monday, May 09, 2022

Samples Received: 16
Samples Analyzed: 16

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219558

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 08:00 AM

Chain-Of-Custody

JOB SITE INFORMATION

Site Caroline Wenzel Elementary School Property
Address 6870 Greenhaven Drive
Sacramento, CA 95831
Unit
Claim#
Job # 41731
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.
Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|---|--------------------------|
| 6870-1A | Bldg. A, Boys Restroom, Ceiling, N. Area | Texture |
| 6870-1B | Bldg. A, Boys Restroom, Ceiling, NE Area | Texture |
| 6870-1C | Bldg. A, Boys Restroom, Ceiling, SE Area | Texture |
| 6870-1D | Bldg. A, Girls Restroom, Ceiling, SE Area | Texture |
| 6870-1E | Bldg. A, Girls Restroom, Ceiling, E. Area | Texture |
| 6870-1F | Bldg. A, Staff All-Gender Restroom, E. Wall | Texture |
| 6870-1G | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | Texture |
| 6870-2A | Bldg. A, Boys Restroom, Ceiling, N. Area | Sheetrock-Joint Compound |
| 6870-2B | Bldg. A, Girls Restroom, Ceiling, E. Area | Sheetrock-Joint Compound |
| 6870-2C | Bldg. A, Staff Restroom Corridor, E. Wall, Light Switch | Sheetrock-Joint Compound |
| 6870-3 | Bldg. A, Boys Restroom, N. Wall, White | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 08:00 AM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:23 AM |

Sampler: William Sager

Total Number of Samples 16



Project ID
 MT012219558

| Sample Number | Location | Description |
|---------------|---|-------------|
| 6870-4 | Bldg. A, Girls Restroom, E. Wall, White | Grout |
| 6870-5 | Bldg. A, Boys Restroom, Floor, W. Area, Gray | Grout |
| 6870-6 | Bldg. A, Girls Restroom, Floor, W. Area, Gray | Grout |
| 6870-7 | Bldg. A, Staff All-Gender Restroom, N. Wall, White | Grout |
| 6870-8 | Bldg. A, Staff All-Gender Restroom, Floor, N. Area, White | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 08:00 AM |

| Received by (Lab) | Date/Time |
|---|-----------------------|
|  | 05/09/2022 9:23 AM |

Sampler: William Sager

Total Number of Samples 16



PH 916.361.0555 | FX 916.361.0540
service@nall.com

KS#
Client PO
Project ID

for office use only

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 08:00 AM
Chain-Of-Custody | Analytical Data
Heuresis Pb200i

JOB SITE INFORMATION

Site Caroline Wenzel Elementary School Property
Address 6870 Greenhaven Drive
Sacramento, CA 95831
Unit
Claim#
Job # 26274
Chain # 1

TURN AROUND Same Day **LEAD PAINT** Inspection **MEASUREMENT MODE** Standard **SAMPLING METHOD** Heuresis Pb200i **ANALYTICAL DATA** Action Level - 1
Abatement Level - 1
Total Readings - 19

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|-----------|-----------|----------------------------|
| 6870-1L | Bldg. A, Boy's Restroom, Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 6870-2L | Bldg. A, Boy's Restroom, Walls, Tiles | Ceramic | White | N/A | <LOD |
| 6870-3L | Bldg. A, Boy's Restroom, Walls, Tiles | Ceramic | Tan | N/A | <LOD |
| 6870-4L | Bldg. A, Boy's Restroom, Walls, Tiles | Ceramic | Brown | N/A | <LOD |
| 6870-5L | Bldg. A, Boy's Restroom, Baseboards, Tiles | Ceramic | White | N/A | <LOD |
| 6870-6L | Bldg. A, Boy's Restroom, Floor, Tiles | Ceramic | Brown | N/A | <LOD |
| 6870-7L | Bldg. A, Girl's Restroom, Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 6870-8L | Bldg. A, Girl's Restroom, Walls, Tiles | Ceramic | White/Tan | Intact | 3.0 |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

Date May 06, 2022
Time 08:00 AM

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 08:00 AM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 08:00 AM |

Total Number of Samples 19

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|-------|-----------|----------------------------|
| 6870-9L | Bldg. A, Staff Restroom Corridor, Walls, Paint | Sheetrock | Tan | N/A | <LOD |
| 6870-10L | Bldg. A, Staff Women's Restroom, Walls/Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 6870-11L | Bldg. A, Staff Women's Restroom, Walls, Tiles | Ceramic | White | N/A | <LOD |
| 6870-12L | Bldg. A, Staff Women's Restroom, Walls, Tiles | Ceramic | Brown | N/A | <LOD |
| 6870-13L | Bldg. A, Staff Women's Restroom, Walls, Tiles | Ceramic | Green | N/A | <LOD |
| 6870-14L | Bldg. A, Staff Women's Restroom, Floor, Tiles | Ceramic | Tan | N/A | <LOD |
| 6870-15L | Bldg. A, Staff All-Gender Restroom, Walls/Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 6870-16L | Bldg. A, Staff All-Gender Restroom, Walls, Tiles | Ceramic | White | N/A | <LOD |
| 6870-17L | Bldg. A, Staff All-Gender Restroom, Walls, Tiles | Ceramic | Brown | N/A | <LOD |
| 6870-18L | Bldg. A, Staff All-Gender Restroom, Walls, Tiles | Ceramic | Green | N/A | <LOD |
| 6870-19L | Bldg. A, Staff All-Gender Restroom, Floor, Tiles | Ceramic | Tan | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 08:00 AM |

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 08:00 AM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 08:00 AM |

Total Number of Samples 19



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID

MT012219556

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 1:00 PM



JOB SITE INFORMATION

Sampler William Sager
Project Earl Warren Elementary School Property
Address 5420 Lowell Street
 Sacramento, CA 95820

POLARIZED LIGHT MICROSCOPY (PLM)
EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|--|---|---------------------------------|------------------------|
| 5420-1A | 19556-1 | Bldg. B, Girls Restroom, W. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-1B | 19556-2 | Bldg. B, Boys Restroom, E. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-1C | 19556-3 | Bldg. B, Boys Restroom, N. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-2 | 19556-4 | Bldg. B, Girls Restroom, W. Wall | White Sheetrock-Joint Compound Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-3 | 19556-5 | Bldg. B, Boys Restroom, N. Wall, White (Same in all Restrooms for Both Bldgs.) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-4 | 19556-6 | Bldg. B, Boys Restroom, Floor, W. Area, Gray (Same in all Restrooms for Both Bldgs.) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-5 | 19556-7 | Bldg. A, Staff Restroom, E. Wall | Gray Plaster Fibrous Homogenous | 10% Cellulose 90% Binder | None Detected |

Report

Date Monday, May 09, 2022

Samples Received: 11
Samples Analyzed: 11

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID
MT012219556

| | | | | | |
|---------|----------|----------------------------------|---|-----------------------------|---------------|
| 5420-6A | 19556-8 | Bldg. A, Staff Restroom, W. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-6B | 19556-9 | Bldg. A, Staff Restroom, S. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-6C | 19556-10 | Bldg. A, Staff Restroom, N. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 5420-7 | 19556-11 | Bldg. A, Staff Restroom, N. Wall | White Sheetrock-Joint Compound Fibrous Heterogenous | 10% Cellulose 90% Binder | None Detected |

| | |
|---------------|----------------------|
| Report | |
| Date | Monday, May 09, 2022 |

Samples Received: 11
Samples Analyzed: 11

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219556

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 01:00 PM

Chain-Of-Custody

JOB SITE INFORMATION

Site Earl Warren Elementary School Property
Address 5420 Lowell Street
Sacramento, CA 95820
Unit
Claim#
Job # 41728
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.

Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|--|--------------------------|
| 5420-1A | Bldg. B, Girls Restroom, W. Wall | Texture |
| 5420-1B | Bldg. B, Boys Restroom, E. Wall | Texture |
| 5420-1C | Bldg. B, Boys Restroom, N. Wall | Texture |
| 5420-2 | Bldg. B, Girls Restroom, W. Wall | Sheetrock-Joint Compound |
| 5420-3 | Bldg. B, Boys Restroom, N. Wall, White (Same in all Restrooms for Both Bldgs.) | Grout |
| 5420-4 | Bldg. B, Boys Restroom, Floor, W. Area, Gray (Same in all Restrooms for Both Bldgs.) | Grout |
| 5420-5 | Bldg. A, Staff Restroom, E. Wall | Plaster |
| 5420-6A | Bldg. A, Staff Restroom, W. Wall | Texture |
| 5420-6B | Bldg. A, Staff Restroom, S. Wall | Texture |
| 5420-6C | Bldg. A, Staff Restroom, N. Wall | Texture |
| 5420-7 | Bldg. A, Staff Restroom, N. Wall | Sheetrock-Joint Compound |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 01:00 PM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:23 AM |

Sampler: William Sager

Total Number of Samples 11



PH 916.361.0555 | FX 916.361.0540
service@nall.com

for office use only
KS#
Client PO
Project ID

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 01:00 PM

Chain-Of-Custody | Analytical Data
Heuresis Pb200i

JOB SITE INFORMATION

Site Earl Warren Elementary School Property
Address 5420 Lowell Street
Sacramento, CA 95820
Unit
Claim#
Job # 26275
Chain # 1

TURN AROUND Same Day **LEAD PAINT** Inspection **MEASUREMENT MODE** Standard **SAMPLING METHOD** Heuresis Pb200i **ANALYTICAL DATA** Action Level - 1
Abatement Level - 1
Total Readings - 8

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|------------|-----------|----------------------------|
| 5420-1L | Bldg. B, Boy's & Girl's Restrooms, Walls, Paint | Sheetrock | White | N/A | <LOD |
| 5420-2L | Bldg. B, Boy's & Girl's Restrooms, Walls, Tiles | Ceramic | Blue/White | N/A | <LOD |
| 5420-3L | Bldg. B, Boy's & Girl's Restrooms, Doors, Frames & Trim, Paint | Metal | Blue | N/A | <LOD |
| 5420-4L | Bldg. B, Boy's & Girl's Restrooms, Floors, Tiles | Ceramic | Tan | N/A | <LOD |
| 5420-5L | Bldg. A, Staff Restroom, Walls, Paint | Sheetrock | White | N/A | <LOD |
| 5420-6L | Bldg. A, Staff Restroom, Walls, Tiles | Ceramic | White/Blue | N/A | <LOD |
| 5420-7L | Bldg. A, Staff Restroom, Doors, Frames & Trim, Paint | Metal | Blue | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

Date May 06, 2022
Time 01:00 PM

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 01:00 PM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 01:00 PM |

Total Number of Samples 8

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|---------------------------------------|--------------------|-------|-----------|----------------------------|
| 5420-8L | Bldg. A, Staff Restroom, Floor, Tiles | Ceramic | Tan | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 01:00 PM |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 01:00 PM |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|---|------------------------|
|  | 05/06/2022 01:00 PM |

California Dept. of Public Health
www.2.epa.gov/lead



Sampler: William Sager

Analyst: William Sager

Total Number of Samples 8



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID

MT012219555

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.

Name Paula Lee

Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762

Phone (916) 361 - 0555

Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022

Time 11:30 AM

JOB SITE INFORMATION

Sampler William Sager

Project Elder Creek School Elder Creek Elementary School Property

Address 7934 Lemon Hill Avenue

Sacramento, CA 95824



Analytical Data

POLARIZED LIGHT MICROSCOPY (PLM)

EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|---|--------------------------------------|---------------------------------|------------------------|
| 7934-1A | 19555-1 | Bldg. H, Boys Restroom, Floor (Same in all 3 Restrooms) | Gray Linoleum Fibrous Homogenous | 10% Fiberglass 90% Binder | None Detected |
| 7934-1B | 19555-2 | Bldg. H, Boys Restroom, Floor (Same in all 3 Restrooms) | Yellow Mastic Non-Fibrous Homogenous | 100% Binder | None Detected |
| 7934-2 | 19555-3 | Bldg. H, Girls Restroom, W. Wall, Above Drop Ceiling | White Sheetrock Fibrous Homogenous | 30% Cellulose 70% Binder | None Detected |
| 7934-3 | 19555-4 | Bldg. H, Girls Restroom, E. Wall, Base | Yellow Mastic Non-Fibrous Homogenous | 100% Binder | None Detected |

Report

Date Monday, May 09, 2022

Samples Received: 4
Samples Analyzed: 4

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219555

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 11:30 AM

Chain-Of-Custody

JOB SITE INFORMATION

Site Elder Creek School Elder Creek Elementary School Property
Address 7934 Lemon Hill Avenue
Sacramento, CA 95824
Unit
Claim#
Job # 41727
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.
Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|---|--------------------------|
| 7934-1A | Bldg. H, Boys Restroom, Floor (Same in all 3 Restrooms) | Linoleum |
| 7934-1B | Bldg. H, Boys Restroom, Floor (Same in all 3 Restrooms) | Mastic |
| 7934-2 | Bldg. H, Girls Restroom, W. Wall, Above Drop Ceiling | Sheetrock-Joint Compound |
| 7934-3 | Bldg. H, Girls Restroom, E. Wall, Base | Cove Base Mastic |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 11:30 AM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:23 AM |

Sampler: William Sager

Total Number of Samples 4



KS#
Client PO
Project ID

for office use only

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 11:30 AM

Chain-Of-Custody | Analytical Data

Heuresis Pb200i

JOB SITE INFORMATION

Site Elder Creek School Elder Creek Elementary School Property
Address 7934 Lemon Hill Avenue
Sacramento, CA 95824
Unit
Claim#
Job # 26276
Chain # 1

| | | | | |
|--------------------------------|---------------------------------|-------------------------------------|---|---|
| TURN AROUND Same Day | LEAD PAINT Inspection | MEASUREMENT MODE Standard | SAMPLING METHOD Heuresis Pb200i | ANALYTICAL DATA Action Level - 1 Abatement Level - 1 Total Readings - 1 |
|--------------------------------|---------------------------------|-------------------------------------|---|---|

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--------------------------------|--------------------|-------|-----------|----------------------------|
| 7934-1L | Bldg. H, Exterior Walls, Paint | Wood | White | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 11:30 AM |

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 11:30 AM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 11:30 AM |

Total Number of Samples 1



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID
MT012219551

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 10:30 AM

JOB SITE INFORMATION

Sampler William Sager
Project John H. Still Elementary School Property
Address 2200 John Still Drive
 Sacramento, CA 95832

MicroTest

Laboratories

Analytical Data

POLARIZED LIGHT MICROSCOPY (PLM)

EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|---|--------------------------------------|---------------------------------|------------------------|
| 2200-1A | 19551-1 | Restroom Bldg., Exterior Wall, NW Area | Gray Stucco Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-1B | 19551-2 | Restroom Bldg., Exterior Wall, E. Area | Gray Stucco Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-1C | 19551-3 | Restroom Bldg., Exterior Wall, SW Area | Gray Stucco Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-2A | 19551-4 | Restroom Bldg., Girls Restroom, E. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-2B | 19551-5 | Restroom Bldg., Girls Restroom, S. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-2C | 19551-6 | Restroom Bldg., Boys Restroom, N. Wall | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |

Report
Date Monday, May 09 2022

Samples Received: 14
Samples Analyzed: 14

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219551

| | | | | | |
|---------|----------|--|---|-----------------------------|---------------|
| 2200-3 | 19551-7 | Restroom Bldg., Girls Restroom, E. Wall | White Sheetrock-Joint Compound Fibrous Heterogenous | 10% Cellulose 90% Binder | None Detected |
| 2200-4 | 19551-8 | Restroom Bldg., Boys Restroom, Floor, N. Area, Gray (Same in Girls Restroom) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-5 | 19551-9 | Restroom Bldg., Boys Restroom, E. Wall, White (Same in Girls Restroom) | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-6A | 19551-10 | Bldg. A, Mens Restroom, W. Wall, Light Switch | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-6B | 19551-11 | Bldg. A, Restroom Hallway, E. Wall, Outlet | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-6C | 19551-12 | Bldg. A, Restroom Hallway, W. Wall, Light Switch | White Texture Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2200-7 | 19551-13 | Bldg. A, Restroom Hallway, W. Wall, Light Switch | White Sheetrock-Joint Compound Fibrous Heterogenous | 5% Cellulose 95% Binder | None Detected |
| 2200-8 | 19551-14 | Bldg. A, Womens Restroom, Floor, White (Same in Mens Restroom) | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |

| Report | |
|-------------|----------------------|
| Date | Monday, May 09, 2022 |

Samples Received: 14
Samples Analyzed: 14

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219551

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 10:30 AM

Chain-Of-Custody

JOB SITE INFORMATION

Site John H. Still Elementary School Property
Address 2200 John Still Drive
Sacramento, CA 95832
Unit
Claim#
Job # 41723
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.

Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|--|--------------------------|
| 2200-1A | Restroom Bldg., Exterior Wall, NW Area | Stucco |
| 2200-1B | Restroom Bldg., Exterior Wall, E. Area | Stucco |
| 2200-1C | Restroom Bldg., Exterior Wall, SW Area | Stucco |
| 2200-2A | Restroom Bldg., Girls Restroom, E. Wall | Texture |
| 2200-2B | Restroom Bldg., Girls Restroom, S. Wall | Texture |
| 2200-2C | Restroom Bldg., Boys Restroom, N. Wall | Texture |
| 2200-3 | Restroom Bldg., Girls Restroom, E. Wall | Sheetrock-Joint Compound |
| 2200-4 | Restroom Bldg., Boys Restroom, Floor, N. Area, Gray (Same in Girls Restroom) | Grout |
| 2200-5 | Restroom Bldg., Boys Restroom, E. Wall, White (Same in Girls Restroom) | Grout |
| 2200-6A | Bldg. A, Mens Restroom, W. Wall, Light Switch | Texture |
| 2200-6B | Bldg. A, Restroom Hallway, E. Wall, Outlet | Texture |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 10:30 AM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:09 AM |

Sampler: William Sager

Total Number of Samples 14



Project ID
 MT012219551

| Sample Number: | Location | Description |
|----------------|--|--------------------------|
| 2200-6C | Bldg. A, Restroom Hallway, W. Wall, Light Switch | Texture |
| 2200-7 | Bldg. A, Restroom Hallway, W. Wall, Light Switch | Sheetrock-Joint Compound |
| 2200-8 | Bldg. A, Womens Restroom, Floor, White (Same in Mens Restroom) | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 10:30 AM |

| Received by (Lab) | Date/Time |
|---|-----------------------|
|  | 05/09/2022 9:09 AM |

Sampler: William Sager

Total Number of Samples 14



KS#
Client PO
Project ID

for office use only

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395-3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 10:30 AM

Chain-Of-Custody | Analytical Data

Heuresis Pb200i

JOB SITE INFORMATION

Site John H. Still Elementary School Property
Address 2200 John Still Drive
Sacramento, CA 95832
Unit
Claim#
Job # 26277
Chain # 1

TURN AROUND Same Day **LEAD PAINT** Inspection **MEASUREMENT MODE** Standard **SAMPLING METHOD** Heuresis Pb200i **ANALYTICAL DATA** Action Level - 1
Abatement Level - 1
Total Readings - 8

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|-------|-----------|----------------------------|
| 2200-1L | Restroom Bldg., Boy's & Girl's Restrooms, Walls/Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 2200-2L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, Tiles | Ceramic | White | N/A | <LOD |
| 2200-3L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, Tiles | Ceramic | Green | N/A | <LOD |
| 2200-4L | Restroom Bldg., Boy's & Girl's Restrooms, Walls, Tiles | Ceramic | Brown | N/A | <LOD |
| 2200-5L | Restroom Bldg., Boy's & Girl's Restrooms, Floors, Tiles | Ceramic | Tan | N/A | <LOD |
| 2200-6L | Bldg. A, Men's & Women's Staff Restrooms, Walls/Ceiling, Paint | Sheetrock | Tan | N/A | <LOD |
| 2200-7L | Bldg. A, Men's & Women's Staff Restrooms, Baseboards, Tiles | Ceramic | White | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 10:30 AM |

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 10:30 AM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 10:30 AM |

Total Number of Samples 8

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|-------|-----------|----------------------------|
| 2200-8L | Bldg. A, Men's & Women's Staff Restrooms, Floor, Tiles | Ceramic | Tan | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 10:30 AM |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 10:30 AM |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|---|------------------------|
|  | 05/06/2022 10:30 AM |

California Dept. of Public Health
www.2.epa.gov/lead



Sampler: William Sager

Analyst: William Sager

Total Number of Samples 8



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID
MT012219557

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 2:30 PM

JOB SITE INFORMATION

Sampler William Sager
Project Leonardo Da Vinci K-8
Address 4701 Joaquin Way
 Sacramento, CA 95822

MicroTest
Laboratories
 Analytical Data

POLARIZED LIGHT MICROSCOPY (PLM)

EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|--|------------------------------------|---------------------------------|------------------------|
| 4701-1 | 19557-1 | Bldg. E, Handicap Restroom, N. Wall, White (Same in all 3 Restrooms) | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 4701-2 | 19557-2 | Bldg. E, Handicap Restroom, Floor, S. Area, Gray (Same in all 3 Restrooms) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |

Report
Date Monday, May 09, 2022

Samples Received: 2
Samples Analyzed: 2

Analyst: Nolan Starbuck

Authorized Signatory:


 Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219557

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 02:30 PM

Chain-Of-Custody

JOB SITE INFORMATION

Site Leonardo Da Vinci K-8
Address 4701 Joaquin Way
Sacramento, CA 95822
Unit
Claim#
Job # 41730
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.

Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|--|-------------|
| 4701-1 | Bldg. E, Handicap Restroom, N. Wall, White (Same in all 3 Restrooms) | Grout |
| 4701-2 | Bldg. E, Handicap Restroom, Floor, S. Area, Gray (Same in all 3 Restrooms) | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 02:30 PM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:23 AM |

Sampler: William Sager

Total Number of Samples 2



PH 916.361.0555 | FX 916.361.0540
service@nall.com

KS#
Client PO
Project ID

for office use only

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 02:30 PM

Chain-Of-Custody | Analytical Data

Heuresis Pb200i

JOB SITE INFORMATION

Site Leonardo Da Vinci K-8
Address 4701 Joaquin Way
Sacramento, CA 95822
Unit
Claim#
Job # 26278
Chain # 1

TURN AROUND

Same Day

LEAD PAINT

Inspection

MEASUREMENT MODE

Standard

SAMPLING METHOD

Heuresis Pb200i

ANALYTICAL DATA

Action Level - 1
Abatement Level - 1
Total Readings - 4

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|--------------|-----------|----------------------------|
| 4701-1L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Walls, Tiles | Ceramic | White | N/A | <LOD |
| 4701-2L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Walls, Tiles | Ceramic | Purple | N/A | <LOD |
| 4701-3L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Doors, Frames & Trim, Paint | Metal | Yellow/Green | N/A | <LOD |
| 4701-4L | Bldg. E, Boy's, Girl's & Handicap Restrooms, Floors, Tiles | Ceramic | Gray | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 02:30 PM |

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 02:30 PM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 02:30 PM |

Total Number of Samples 4



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID

MT012219554

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 1:45 PM

JOB SITE INFORMATION

Sampler William Sager
Project Mark Twain Elementary School Property
Address 4914 58th Street
 Sacramento, CA 95820

MicroTest

Laboratories
Analytical Data

POLARIZED LIGHT MICROSCOPY (PLM)

EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|---|-----------------------------------|---------------------------------|------------------------|
| 4914-1 | 19554-1 | Bldg. J, Womens Restroom, W. Wall, White (Same in All 4 Restrooms for Bldgs. J & G) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 4914-2 | 19554-2 | Bldg. J, Womens Restroom, Floor, S. Area, Gray (Same in All 4 Restrooms for Bldgs. J & G) | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |

Report

Date Monday, May 09, 2022

Samples Received: 2
Samples Analyzed: 2

Analyst: Nolan Starbuck

Authorized Signatory:

 Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219554

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample
Date Friday, May 06, 2022
Time 01:45 PM

Chain-Of-Custody

JOB SITE INFORMATION

Site Mark Twain Elementary School Property
Address 4914 58th Street
Sacramento, CA 95820
Unit
Claim#
Job # 41726
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.

Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|---|-------------|
| 4914-1 | Bldg. J, Womens Restroom, W. Wall, White (Same in All 4 Restrooms for Bldgs. J & G) | Grout |
| 4914-2 | Bldg. J, Womens Restroom, Floor, S. Area, Gray (Same in All 4 Restrooms for Bldgs. J & G) | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 01:45 PM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:09 AM |

Sampler: William Sager

Total Number of Samples 2



PH 916.361.0555 | FX 916.361.0540
service@nall.com

for office use only
KS#
Client PO
Project ID

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 01:45 PM

Chain-Of-Custody | Analytical Data
Heuresis Pb200i

JOB SITE INFORMATION

Site Mark Twain Elementary School Property
Address 4914 58th Street
Sacramento, CA 95820
Unit
Claim#
Job # 26279
Chain # 1

TURN AROUND Same Day **LEAD PAINT** Inspection **MEASUREMENT MODE** Standard **SAMPLING METHOD** Heuresis Pb200i **ANALYTICAL DATA** Action Level - 1
Abatement Level - 1
Total Readings - 6

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|------------|-----------|----------------------------|
| 4914-1L | Bldg. J, Women's & Men's Restrooms, Walls, Tiles | Ceramic | White/Blue | N/A | <LOD |
| 4914-2L | Bldg. J, Women's & Men's Restrooms, Doors, Frame & Trim, Paint | Metal | Blue | N/A | <LOD |
| 4914-3L | Bldg. J, Women's & Men's Restrooms, Floors, Tiles | Ceramic | Tan | N/A | <LOD |
| 4914-4L | Bldg. G, Boy's & Girl's Restrooms, Walls, Tiles | Ceramic | White/Blue | N/A | <LOD |
| 4914-5L | Bldg. G, Boy's & Girl's Restrooms, Doors, Frames & Trim, Paint | Metal | Blue | N/A | <LOD |
| 4914-6L | Bldg. G, Boy's & Girl's Restrooms, Floors, Tiles | Ceramic | Tan | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

Date May 06, 2022
Time 01:45 PM

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 01:45 PM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 01:45 PM |

Total Number of Samples 6



MicroTest Laboratories Inc. NVLAP Code: 200999-0
 3110 Gold Canal Dr. Ste. A. Rancho Cordova, CA 95670
 PH 916.567.9808 | FX 916.404.0302
 www.microtestlabsinc.com | service@microtestlabsinc.com

Project ID

MT012219559

CLIENT INFORMATION

Company National Analytical Laboratories, Inc.
Name Paula Lee
Address 2201 Francisco Drive, Ste. 140-261
 El Dorado Hills CA, 95762
Phone (916) 361 - 0555
Email N.A.L. Distribution List

SAMPLE

Date Friday, May 06, 2022
Time 9:30 AM

JOB SITE INFORMATION

Sampler William Sager
Project Rosa Parks K-8 Property
Address 2250 68th Avenue
 Sacramento, CA 95822



POLARIZED LIGHT MICROSCOPY (PLM)

EPA METHOD 600 / R-93 / 116 & EPA – 40 CFR Appendix E to Subpart E of Part 763

| Sample ID | Accession Number | Client Description | Laboratory Description | Non Fibrous / Fibrous Materials | Asbestiform Minerals % |
|-----------|------------------|--|--------------------------------------|---------------------------------|------------------------|
| 2250-1A | 19559-1 | Bldg. E, Boys Restroom, N. Wall | White Plaster Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-1B | 19559-2 | Bldg. E, Boys Restroom, E. Wall | White Plaster Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-1C | 19559-3 | Bldg. E, Boys Restroom, W. Wall | White Plaster Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-2 | 19559-4 | Bldg. E, Boys Restroom, N. Wall, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-3 | 19559-5 | Bldg. E, Boys Restroom, Floor, N. Area, Gray | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-4A | 19559-6 | Bldg. F, Staff All-Gender Restroom, Floor | Gray Linoleum Fibrous Homogenous | 35% Cellulose 65% Binder | None Detected |

Report

Date Monday, May 09, 2022

Samples Received: 12
Samples Analyzed: 12

Analyst: Nolan Starbuck

Authorized Signatory:

Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219559

| | | | | | |
|---------|----------|---|--|-------------|---------------|
| 2250-4B | 19559-7 | Bldg. F, Staff All-Gender Restroom, Floor | Yellow Mastic Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-5 | 19559-8 | Bldg. F, Staff All-Gender Restroom, W. Wall | White Sheetrock Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-6 | 19559-9 | Bldg. F, Staff All-Gender Restroom, S. Wall | Cream Mastic Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-7 | 19559-10 | Bldg. A, Girls Restroom, S. Wall, White | White Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-8 | 19559-11 | Bldg. A, Girls Restroom, Floor, N. Area, Gray | Gray Grout Non-Fibrous Homogenous | 100% Binder | None Detected |
| 2250-9 | 19559-12 | Bldg. A, Girls Restroom, S. Wall | Gray Concrete Non-Fibrous Homogenous | 100% Binder | None Detected |

Report

Date Monday, May 09, 2022

Samples Received: 12
Samples Analyzed: 12

Analyst: Nolan Starbuck

Authorized Signatory:



 Kelly Favero - Lab Manager

This analytical data sheet constitutes a final report. Due to the limitation of Polarized Light Microscopy (PLM), some samples classified as containing no asbestos in materials, NoneDetected (ND), such as floor tiles or like materials, warrant a recommendation for further analysis by Transmission Electron Microscopy (TEM). Results apply to the sample as received. This report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government. All Samples will be held for not less than 30 days, upon which they will then be disposed of. This report shall not be reproduced in full without written authorization from MicroTest Laboratories, Inc. Soil and rock matrices are considered problematic matrices and MicroTest recommends sample homogenization prior to PLM analysis. Thermal decomposition of asbestos fibers can yield non-asbestiform mineral properties. The reporting limit for calibrated visual area estimation quantitation procedures is 1%. The reporting limit for 400/1000 point count quantitation procedures is 0.25% or 0.1% respectively. The sample is considered acceptable unless otherwise noted. Sub-samples are analyzed separately accept when manufactured with multiple layers (i.e. Linoluem, Drywall, etc.) or requested contrarily by the client



Project ID
MT012219559

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email Tina-Alvarez-Bevens@scusd.edu

Sample

Date Friday, May 06, 2022
Time 09:30 AM

Chain-Of-Custody

JOB SITE INFORMATION

Site Rosa Parks K-8 Property
Address 2250 68th Avenue
Sacramento, CA 95822
Unit
Claim#
Job # 41733
Chain # 1

Analysis: PLM | TTFP - 400 PT.CT.

Turn Around Time: Same Day

| Sample Number: | Location | Description |
|----------------|---|-------------|
| 2250-1A | Bldg. E, Boys Restroom, N. Wall | Plaster |
| 2250-1B | Bldg. E, Boys Restroom, E. Wall | Plaster |
| 2250-1C | Bldg. E, Boys Restroom, W. Wall | Plaster |
| 2250-2 | Bldg. E, Boys Restroom, N. Wall, White | Grout |
| 2250-3 | Bldg. E, Boys Restroom, Floor, N. Area, Gray | Grout |
| 2250-4A | Bldg. F, Staff All-Gender Restroom, Floor | Linoleum |
| 2250-4B | Bldg. F, Staff All-Gender Restroom, Floor | Mastic |
| 2250-5 | Bldg. F, Staff All-Gender Restroom, W. Wall | Sheetrock |
| 2250-6 | Bldg. F, Staff All-Gender Restroom, S. Wall | FRP Mastic |
| 2250-7 | Bldg. A, Girls Restroom, S. Wall, White | Grout |
| 2250-8 | Bldg. A, Girls Restroom, Floor, N. Area, Gray | Grout |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 09:30 AM |

| Received by (Lab) | Date/Time |
|-------------------|-----------------------|
| | 05/09/2022 9:32 AM |

Sampler: William Sager

Total Number of Samples 12



Project ID
MT012219559

| Sample Number: | Location | Description |
|----------------|----------------------------------|-------------|
| 2250-9 | Bldg. A, Girls Restroom, S. Wall | Concrete |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 09:30 AM |

| Received by (Lab) | Date/Time |
|---|-----------------------|
|  | 05/09/2022 9:32 AM |

Sampler: William Sager

Total Number of Samples 12



PH 916.361.0555 | FX 916.361.0540
service@nall.com

KS#
Client PO
Project ID

for office use only

CLIENT INFORMATION

Company Sac City Unified School District
Name Mike Taxara
Address 425 First Avenue
Sacramento CA, 95818
Phone (916) 395 - 3980
Email

SAMPLE

Date Friday, May 06, 2022
Time 09:30 AM

Chain-Of-Custody | Analytical Data

Heuresis Pb200i

JOB SITE INFORMATION

Site Rosa Parks K-8 Property
Address 2250 68th Avenue
Sacramento, CA 95822
Unit
Claim#
Job # 26280
Chain # 1

TURN AROUND Same Day **LEAD PAINT** Inspection **MEASUREMENT MODE** Standard **SAMPLING METHOD** Heuresis Pb200i **ANALYTICAL DATA** Action Level - 1
Abatement Level - 1
Total Readings - 10

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|---|--------------------|------------|-----------|----------------------------|
| 2250-1L | Bldg. E., Boy's Restroom, Walls, Ceiling, Paint | Plaster | White | N/A | <LOD |
| 2250-2L | Bldg. E., Boy's Restroom, Walls, Tiles | Ceramic | Blue | Intact | 7.1 |
| 2250-3L | Bldg. E., Boy's Restroom, Floor, Tiles | Ceramic | Blue | N/A | <LOD |
| 2250-4L | Bldg. E., Boy's Restroom, Doors, Frames & Trim, Paint | Metal | Blue/White | N/A | <LOD |
| 2250-5L | Bldg. F, Staff All-Gender Restroom, Ceiling, Paint | Plaster | White | N/A | <LOD |
| 2250-6L | Bldg. F, Staff All-Gender Restroom, Walls (Behind FRP), Paint | Wood | White | N/A | <LOD |
| 2250-7L | Bldg. F, Staff All-Gender Restroom, Doors, Frames & Trim, Paint | Metal | Blue | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 09:30 AM |

California Dept. of Public Health
www.2.epa.gov/lead



| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|------------------------|------------------------|
| | 05/06/2022 09:30 AM |

Sampler: William Sager

Analyst: William Sager

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Received by (Lab) | Date/Time |
|-------------------|------------------------|
| | 05/06/2022 09:30 AM |

Total Number of Samples 10

| Sample ID: | Sample Location Description | Structure Material | Color | Condition | Lead (mg/cm ²) |
|------------|--|--------------------|--------|-----------|----------------------------|
| 2250-8L | Bldg. A, Girl's Restroom, Walls/Ceiling, Paint | Concrete | White | N/A | <LOD |
| 2250-9L | Bldg. A, Girl's Restroom, Walls, Tiles | Ceramic | Yellow | Intact | 6.3 |
| 2250-10L | Bldg. A, Girl's Restroom, Floor, Tiles | Ceramic | Blue | N/A | <LOD |

<LOD Below Limit of Detection | Reading < 0.0

LCM Lead Containing Material | Readings Ranging from 0 to < 1.0 mg/cm²

LBP Lead Based Paint | Readings Greater than 1.0 mg/cm²

ANALYSIS

| | |
|-------------|--------------|
| Date | May 06, 2022 |
| Time | 09:30 AM |

| Relinquished by (Client) | Date/Time |
|--------------------------|-----------|
| | |

| Received by (Tech) | Date/Time |
|--------------------|-----------|
| | |

| Relinquished by (Tech) | Date/Time |
|---|------------------------|
|  | 05/06/2022 09:30 AM |

| Received by (Lab) | Date/Time |
|---|------------------------|
|  | 05/06/2022 09:30 AM |


California Dept. of Public Health
www.2.epa.gov/lead



Sampler: William Sager


Analyst: William Sager

Total Number of Samples 10

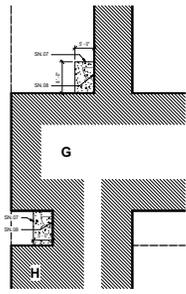

2 (E) DRINKING FOUNTAIN
NOT TO SCALE

3 ENLARGED PLAN - P.O.T.
P=10'0"

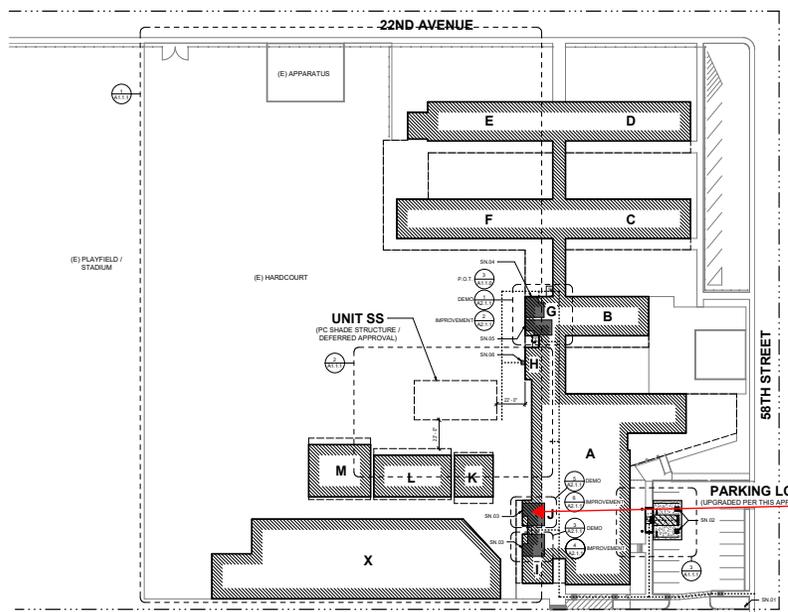

1 SITE PLAN
P=10'0"

| PROPOSED SHED STRUCTURE | | | | |
|-------------------------|----------------|-------------------|-----------|------------------------------|
| UNIT | DESCRIPTION | CONSTRUCTION PERM | OCCUPANCY | ALLOWABLE AREA |
| SS1652 | SHED STRUCTURE | 1-8 OR | A-3 | 8,500 SF MAX 6,000 SF MAX |

| EXISTING BUILDING DESIGNATIONS | | | | |
|--------------------------------|--------------------------------|-------------------------|-----------|-------|
| UNIT | DESCRIPTION | CSA APPLICATION # | AREA (SF) | NOTES |
| A | MULTI-PURPOSE ROOM, CLASSROOMS | 6568, 1540 | 10,775 | |
| B | CLASSROOMS | 6568 | 1,000 | |
| C | CLASSROOMS | 6568 | 2,800 | |
| D | CLASSROOMS | 6568 | 2,800 | |
| E | CLASSROOMS | 6568 | 1,000 | |
| F | CLASSROOMS | 6568 | 3,610 | |
| G | TOILET ROOMS | 6568, THIS APPLICATION | 600 | |
| H | MEDIA / ELECTRICAL | 6568 | 507 | |
| I | RELOCATABLE CLASSROOMS | 11362, THIS APPLICATION | 2,000 | |
| J | RELOCATABLE CLASSROOMS | ES461 | 900 | |
| L | RELOCATABLE CLASSROOMS | - | 1,000 | |
| M | RELOCATABLE CLASSROOMS | - | 1,000 | |

- ### LEGEND
- UNIT DESIGNATION
 - PC SHED STRUCTURE / DEFERRED APPROVAL
 - UNIT DESIGNATION
 - EXISTING BUILDING
 - EXISTING JOINT
 - CONCRETE WALK / PAVING CONTROL JOINT
 - ASPHALT CONCRETE PAVING
- ***** ACCESSIBLE PATH OF TRAVEL
- SEE WALKWAYS SHALL REMOVE A BARRIER FREE P.O.T. ALLOWED UP TO 10' ONLY ABRUPT CHANGES IN ELEVATION UP TO 1/4" ARE ALLOWED TO MAINTAIN A VERTICAL TRANSITION ABRUPT CHANGES IN ELEVATION BETWEEN 1/4" AND 1/2" SHALL BE SMOOTHED WITH A SLOPE NO GREATER THAN 1:48.
 - WALKWAYS SHALL BE FREE OF GRATES UNLESS GRATES ARE REQUIRED. GRATES SHALL BE 1/4" MAXIMUM SIZE. GRATES SHALL BE IN THE DIRECTION OF TRAVEL PER CBC SECTION 109.02.2 AS AN ABRUPT CHANGES IN ELEVATION AT THE EDGE OF ANY WALK WITH AN ADJACENT FLAVOUR SHALL NOT EXCEED 1/4" UNLESS OTHERWISE NOTED.
 - UNIT VERTICAL TO 20 INCHES HORIZONTAL SHALL BE CONSIDERED A RAMP AND SHALL RECEIVE HANDRAILS ON BOTH SIDES OF THE RAMP. HANDRAILS SHALL NOT EXCEED 1/4" UNLESS OTHERWISE NOTED.
 - WALKWAYS SHALL NOT EXCEED 60' UNLESS OTHERWISE NOTED. THE P.O.T. SHALL BE A MINIMUM 48" WIDE. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS.
 - WALKWAYS SHALL NOT EXCEED 60' UNLESS OTHERWISE NOTED. THE P.O.T. SHALL BE A MINIMUM 48" WIDE. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS. THE P.O.T. SHALL BE AT LEAST 48" WIDE AT ALL POINTS.
 - OBJECTS PROTRUDING AND THE P.O.T. SHALL NOT REDUCE THE CLEAR WIDTH OR MANEUVERING SPACE WITHIN THE P.O.T. UNLESS OTHERWISE NOTED.
 - POSSIBLE SPACES 1'6" x 6" x 4' OF ANY WALL AND LOCATIONS FROM BENCH TO WALKWAY SHALL BE SMOOTHED TO MAINTAIN A VERTICAL TRANSITION ABRUPT CHANGES IN ELEVATION BETWEEN 1/4" AND 1/2" SHALL BE SMOOTHED WITH A SLOPE NO GREATER THAN 1:48. GRATES SHALL BE 1/4" MAXIMUM SIZE. GRATES SHALL BE IN THE DIRECTION OF TRAVEL PER CBC SECTION 109.02.2 AS AN ABRUPT CHANGES IN ELEVATION AT THE EDGE OF ANY WALK WITH AN ADJACENT FLAVOUR SHALL NOT EXCEED 1/4" UNLESS OTHERWISE NOTED.

EXISTING PATH OF TRAVEL (POT) ARCHITECT STATEMENT

DESIGN PROFESSIONAL IS GENERALLY RESPONSIBLE FOR CHANGE STATEMENT OF THE POT IDENTIFIED IN THESE CONSTRUCTION DOCUMENTS IS COMPLIANT WITH THE CURRENTLY APPLICABLE CALIFORNIA BUILDING CODES ACCESSIBILITY PROVISIONS FOR PATH OF TRAVEL REQUIREMENTS. THIS PROFESSIONAL IS NOT PROVIDING CONTRACTUAL WARRANTIES AS PART OF THE DESIGN OF THIS PROJECT. THE POT HAS EXAMINED ANY ELEMENTS, COMPONENTS OR PORTIONS OF THE POT THAT WERE DEEMED TO BE NON-COMPLIANT.

IT HAS BEEN IDENTIFIED AND IS BEING CORRECTED AS NECESSARY TO BRING THEM INTO COMPLIANCE. HAS BEEN IDENTIFIED AND IS BEING CORRECTED AS NECESSARY TO BRING THEM INTO COMPLIANCE. HAS BEEN IDENTIFIED AND IS BEING CORRECTED AS NECESSARY TO BRING THEM INTO COMPLIANCE. HAS BEEN IDENTIFIED AND IS BEING CORRECTED AS NECESSARY TO BRING THEM INTO COMPLIANCE.

ANY NON-COMPLIANT ELEMENTS, COMPONENTS OR PORTIONS OF THE POT THAT WILL NOT BE CORRECTED BY THIS PROJECT (BASED ON VERTICAL THRESHOLD LIMITATIONS OR A PHYSICAL UNREASONABLE HURDLES) ARE SO INDICATED IN THESE CONSTRUCTION DOCUMENTS.

PAVING CONSTRUCTION OF POT CHASE WITHIN THE SCOPE OF THE PROPOSED IMPROVEMENTS AS SHOWN ON THIS PLAN SHALL BE IN ACCORDANCE WITH THE CALIFORNIA BUILDING CODES ACCESSIBILITY PROVISIONS FOR PATH OF TRAVEL REQUIREMENTS. THIS PROFESSIONAL IS NOT PROVIDING CONTRACTUAL WARRANTIES AS PART OF THE DESIGN OF THIS PROJECT BY MEANS OF A CONSTRUCTION CHANGE DOCUMENT.

ACCESSIBLE PARKING STALL CALCULATION

| | |
|--------------------------------|------------------------------|
| TOTAL PARKING STALL COUNT | RETAILS |
| REQUIRED ACCESSIBLE STALLS | 1 (1 OF 20 STALLS) |
| REQUIRED VAN ACCESSIBLE STALLS | 1 (1 OF 4 ACCESSIBLE STALLS) |
| ACCESSIBLE STALLS PROVIDED | 1 (20 PARKING STALLS) |

SHEET NOTES

- SS1651 ENLARGED LOT ENTRANCE SIGN REVIEWED
- SS1652 ACCESSIBLE PARKING STALLS PER THIS APPLICATION
- SS1653 ACCESSIBLE STALL TOILET ROOM IMPROVED
- SS1654 PER THIS APPLICATION
- SS1655 ACCESSIBLE TOILET ROOM IMPROVED
- SS1656 PER THIS APPLICATION
- SS1657 ACCESSIBLE TOILET ROOM IMPROVED
- SS1658 PER THIS APPLICATION
- SS1659 ACCESSIBLE TOILET ROOM IMPROVED
- SS1660 PER THIS APPLICATION
- SS1661 REMOVE 45 DOOR THRESHOLD, INSTALL NEW DOOR
- SS1662 IMPROVED PER THIS APPLICATION

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
SACRAMENTO, CA

SHADE STRUCTURE AT MARK TWAIN ELEMENTARY SCHOOL

Revision

SITE PLAN AND CODE INFORMATION

(BUILDING TYPE/NAME)

UNIT A


PROJECT NO: 1664-14

DATE: 02/10/2023

SHEET: 01

A1.1.0

D:\1504.13 Earl Warren Central akadhim.RGA.rvt 5/10/2022 10:24:45 PM

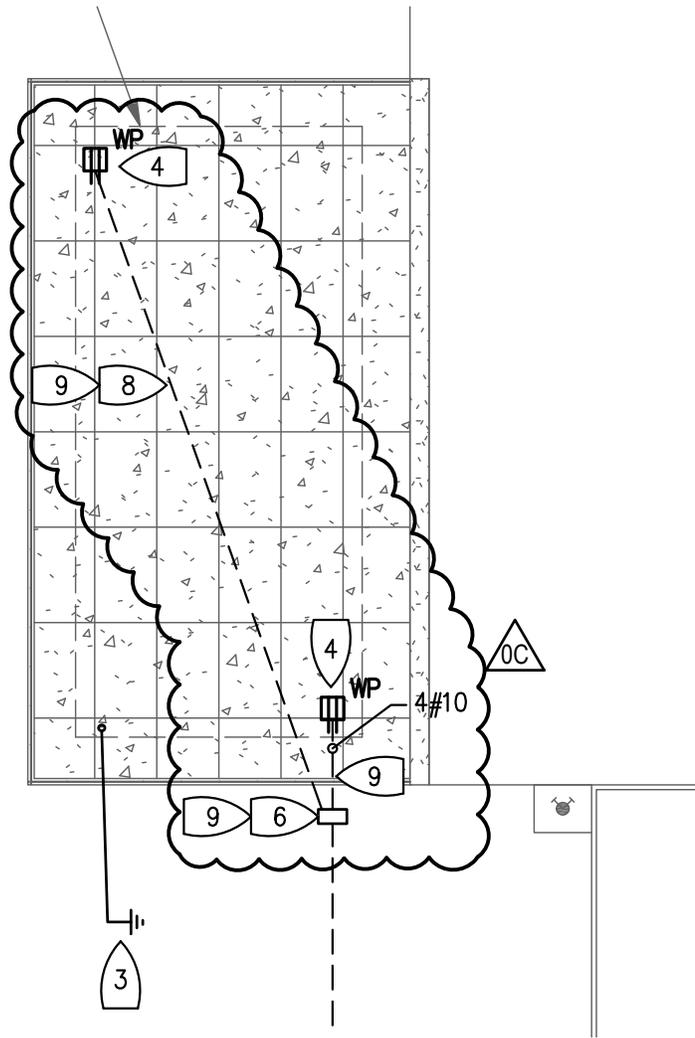

4 LOCKABLE, WEATHERPROOF RECEPTACLE TO HAVE A SINGLE-GANG METAL CUT-IN BACK BOX WITH 2-5/8" DEPTH AND 1" THREADED PORT(S). MOUNT RECEPTACLES 36" ABOVE GRADE UNLESS SPECIFIED OTHERWISE. SEE DETAIL 4/E3.1. 0C

9 PROVIDE 4#10 + 1#10 GND CONDUCTORS FROM PULL BOX TO FIRST SHADE STRUCTURE RECEPTACLE. PULL 2#10 + 1#10 GND CONDUCTORS FROM FIRST RECEPTACLE BACK TO PULL BOX THEN TO SECOND RECEPTACLE. CONDUCTORS TO SHARE 1" CONDUIT. DO NOT SPLICE IN PULL BOX. 0C


ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

REF. E.1.1 0C



SITE PLAN AND KEYED NOTES
 SHADE STRUCTURE AT EARL WARREN
 ELEMENTARY SCHOOL
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
 SACRAMENTO, CA
 DSA APP. 02-120000

DATE: 05/10/22
 PROJECT NO.: 1504.13
 SHEET:
AD0C.13

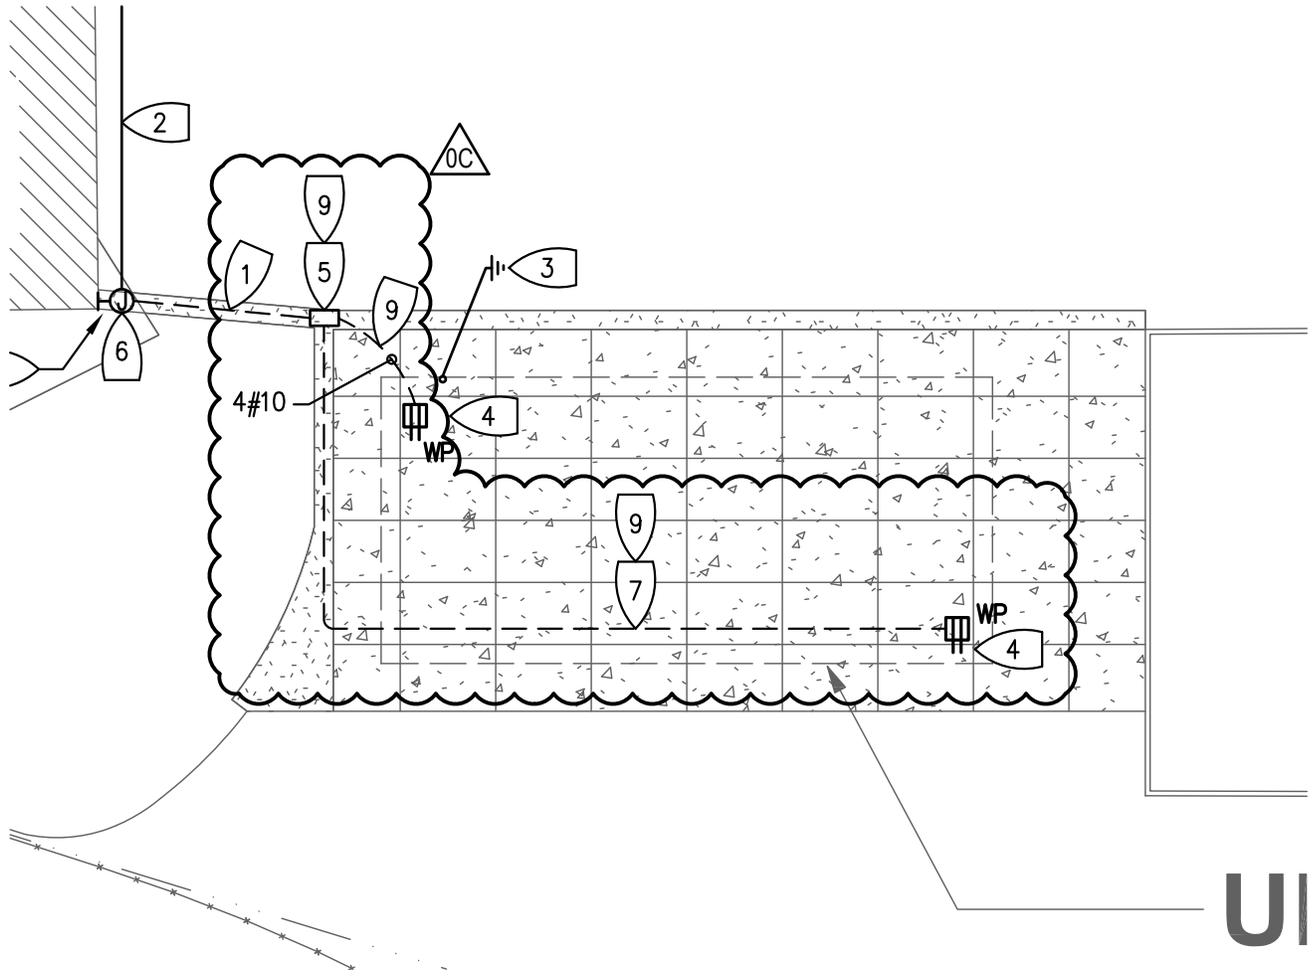

UI

4 LOCKABLE, WEATHERPROOF RECEPTACLE TO HAVE A SINGLE-GANG METAL CUT-IN BACK BOX WITH 2-5/8" DEPTH AND 1" THREADED PORT(S). MOUNT RECEPTACLES 36" ABOVE GRADE UNLESS SPECIFIED OTHERWISE. SEE DETAIL 4/E3.1. 0C

9 PROVIDE 4#10 + 1#10 GND CONDUCTORS FROM PULL BOX TO FIRST SHADE STRUCTURE RECEPTACLE. PULL 2#10 + 1#10 GND CONDUCTORS FROM FIRST RECEPTACLE BACK TO PULL BOX THEN TO SECOND RECEPTACLE. CONDUCTORS TO SHARE 1" CONDUIT. DO NOT SPLICE IN PULL BOX. 0C

ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

REF. E1.1 0C




SITE PLAN AND KEYED NOTES
 SHADE STRUCTURE AT ELDER CREEK
 ELEMENTARY SCHOOL
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
 SACRAMENTO, CA
 DSA APP. 02-120002

DATE: 05/10/22
 PROJECT NO.: 1504.12
 SHEET: AD0C.14

D:\1504.12 Elder Creek_Central_akadhim.RGA.rvt 5/10/2022 10:22:29 PM

D:\1504.14 Mark Twain Central_akadhim.RGA.rvt 5/10/2022 10:26:55 PM

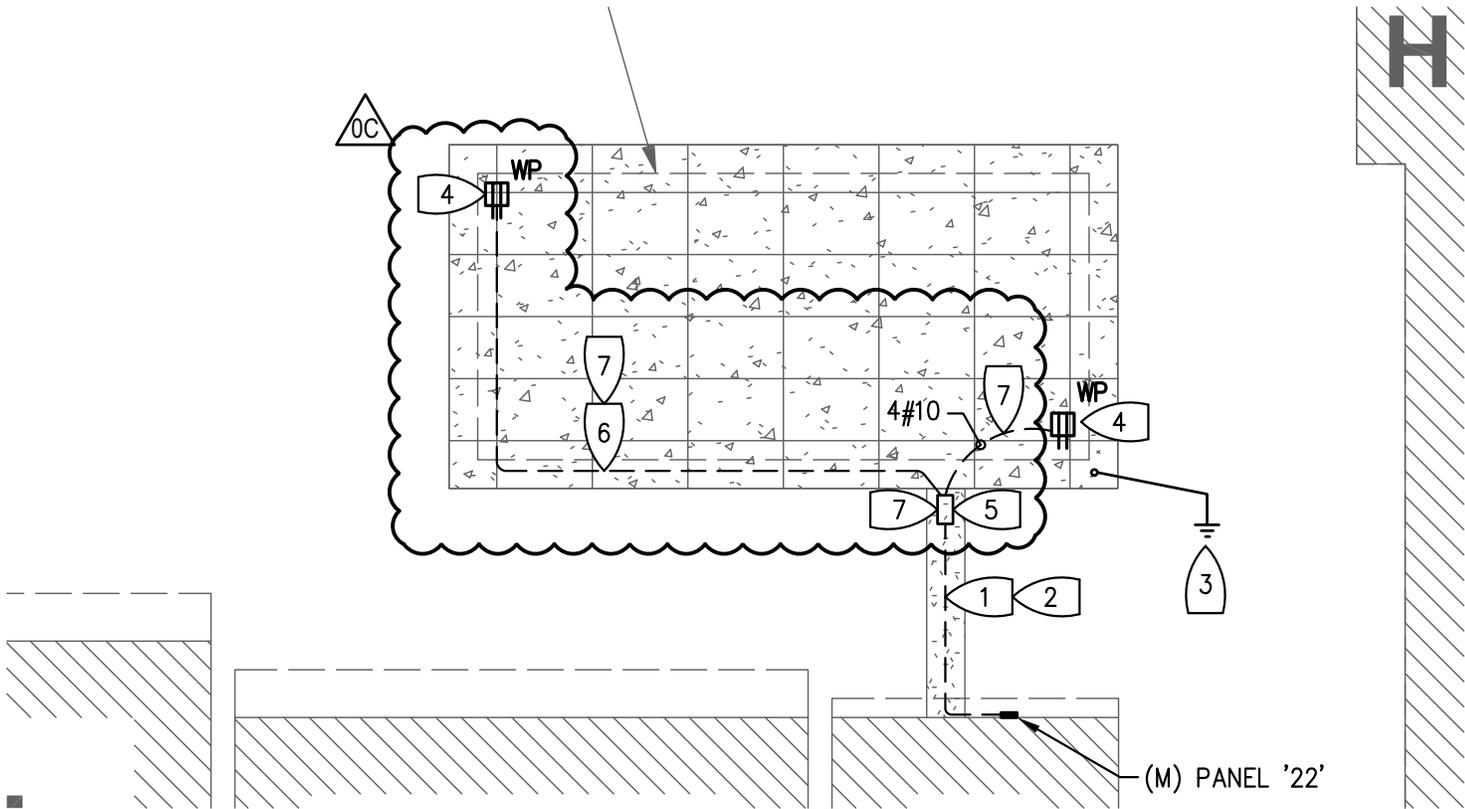

4 LOCKABLE, WEATHERPROOF RECEPTACLE TO HAVE A SINGLE-GANG METAL CUT-IN BACK BOX WITH 2-5/8" DEPTH AND 1" THREADED PORT(S). MOUNT RECEPTACLES 36" ABOVE GRADE UNLESS SPECIFIED OTHERWISE. SEE DETAIL 4/E3.1.

7 PROVIDE 4#10 + 1#10 GND CONDUCTORS FROM PULL BOX TO FIRST SHADE STRUCTURE RECEPTACLE. PULL 2#10 + 1#10 GND CONDUCTORS FROM FIRST RECEPTACLE BACK TO PULL BOX THEN TO SECOND RECEPTACLE. CONDUCTORS TO SHARE 1" CONDUIT. DO NOT SPLICE IN PULL BOX.


ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

REF. E1.1



SITE PLAN AND KEYED NOTES
 SHADE STRUCTURE AT MARK TWAIN
 ELEMENTARY SCHOOL
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
 SACRAMENTO, CA
 DSA APP. 02-120006

DATE: 05/10/22
 PROJECT NO.: 1504.14
 SHEET:
AD0C.15

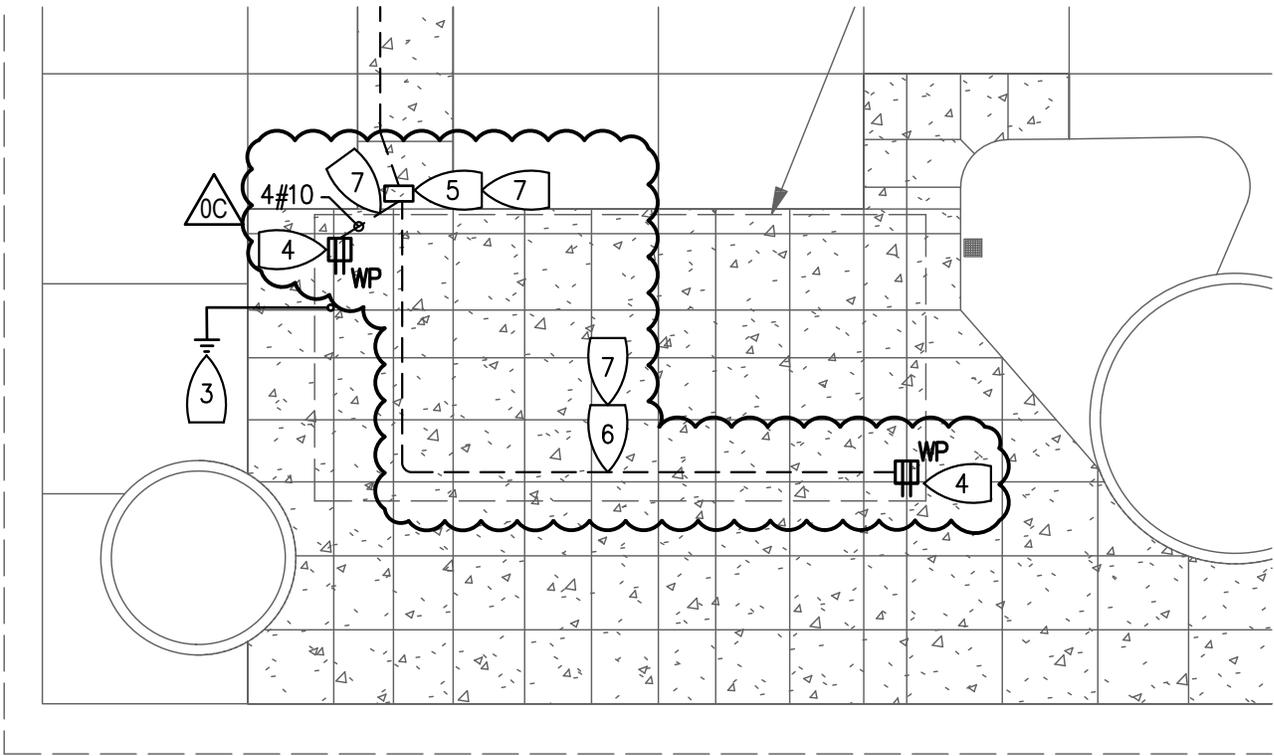

4 LOCKABLE, WEATHERPROOF RECEPTACLE TO HAVE A SINGLE-GANG METAL CUT-IN BACK BOX WITH 2-5/8" DEPTH AND 1" THREADED PORT(S). MOUNT RECEPTACLES 36" ABOVE GRADE UNLESS SPECIFIED OTHERWISE. SEE DETAIL 4/E3.1. 0C

7 PROVIDE 4#10 + 1#10 GND CONDUCTORS FROM PULL BOX TO FIRST SHADE STRUCTURE RECEPTACLE. PULL 2#10 + 1#10 GND CONDUCTORS FROM FIRST RECEPTACLE BACK TO PULL BOX THEN TO SECOND RECEPTACLE. CONDUCTORS TO SHARE 1" CONDUIT. DO NOT SPLICE IN PULL BOX. 0C

ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

REF. E1.1 0C




SITE PLAN AND KEYED NOTES
 SHADE STRUCTURE AT ROSA PARKS MIDDLE SCHOOL
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
 SACRAMENTO, CA
 DSA APP. 02-120007

DATE: 05/10/22
 PROJECT NO.: 1504.10
 SHEET: AD0C.16

D:\1504.10 Rosa Parks Central_akadhim.RGA.rvt 5/10/2022 10:18:17 PM

D:\1504.11 John Still Central_akadhim.RGA.rvt

5/10/2022 10:19:56 PM

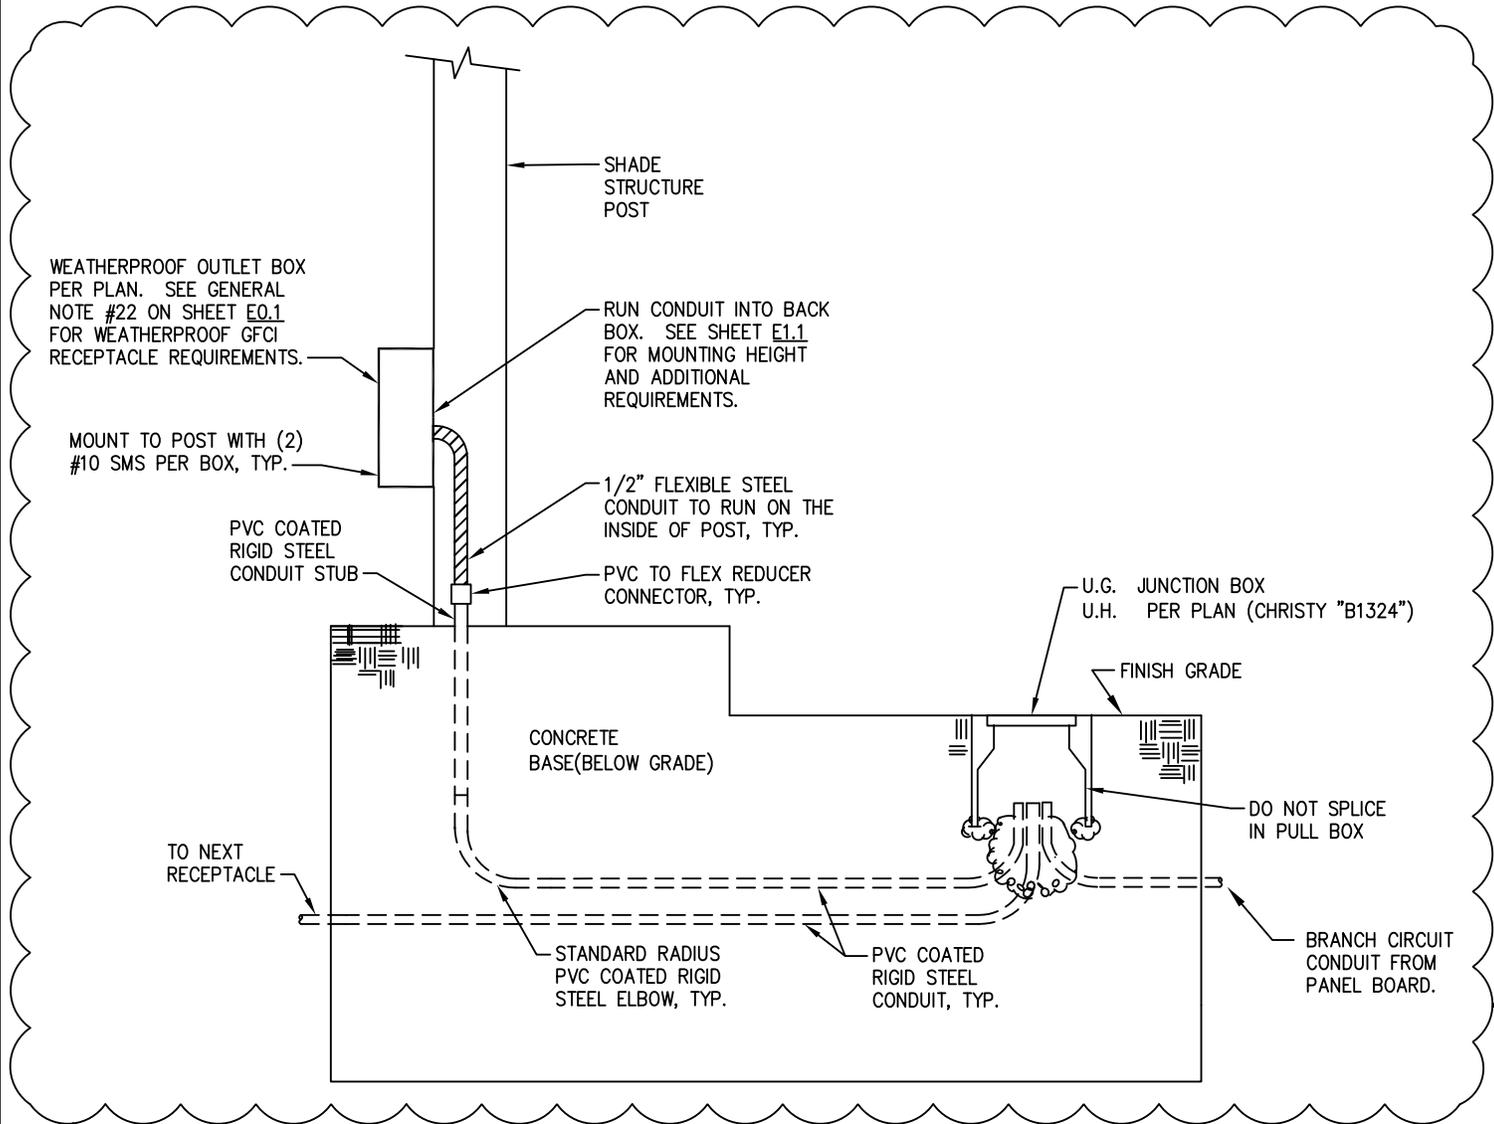

OC

4 CONDUIT STUB IN POST DETAIL
SCALE: NONE

ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

REF. E3.1

OC



CONDUIT STUB IN POST DETAIL
 SHADE STRUCTURE AT VARIOUS ELEMENTARY SCHOOLS
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT
 SACRAMENTO, CA

| | |
|--------------|----------|
| DATE: | 05/10/22 |
| PROJECT NO.: | 1504.11 |
| SHEET: | AD0C.17 |