

January 25, 2018

**Rainforth Grau Architects Project No. 2015-1225.00**

DSA File and Application No. 34-53/02-115661

PTN: 67439-338

**ADDENDUM NO. 04**

Sutter Middle School – HVAC Replacement  
Sacramento, California



---

Rainforth Grau Architects

---

Beuhler & Beuhler Structural Engineers, Inc.

---

Harry A. Yee & Associates, Inc.

1. ALL WORKMANSHIP, MATERIALS, APPLIANCES AND EQUIPMENT which may be included in the following items shall be the same relative quantity as described for similar work set forth in the original or main specifications of which these Addendum items shall be considered a part.
2. ADDENDA
  - A. Addendum No. 3
    1. Due to a technical discrepancy in the previous file the addendum was originally posted as incomplete. It is reposted in its entirety (15 pages) for download. Please download the complete addendum and retain with your project files.
3. ADDENDUM DRAWINGS (included with this Addendum)  
The following Addendum drawings modify or supplement the issued bid documents.
  - AD4.01 REVISION TO SHEET S1.1.1

4. PROJECT MANUAL:

A. Section 01 1100, Summary of Work, Addendum #3

1. Article 1.3, Work by Others: Delete this article in its entirety.

**Contractor is to include necessary removal of the hazardous material in the bid.**

5. DRAWINGS

A. Sheet A2.2.1, Unit C – Floor Plan

1. General Notes: ADD note to read, “6. Patch concrete where anchors have been removed.”
2. Sheet Note SN.02: REVISE to read, “SN.02 not used.”

B. Sheets A2.3.1 - A2.3.3, Unit D - Floor Plans

1. General Notes: ADD note to read, “6. Patch concrete where anchors have been removed.”

C. Sheet A8.1.2, Details

1. Detail 11, Kitchen Wall at column: ADD note to read, “Provide corner guards as shown: 2-inch x 2-inch x 16 gauge stainless steel, type 304, with #4 Satin finish, as manufactured by Koroseal Wall Protection Systems or accepted equal. Length to be 8'-0". Install to walls securely in accordance with manufacturer's written instructions.”
2. Detail 12, Kitchen Wall – Column Section: REVISE “4” x 18 GA. studs” to read “3-4” x 18 GA. steel studs”.


D. Sheet S1.1.1, Repair Details

1. Detail 12, Infill Existing Penetration at Slab or Wall.
  - a. DELETE detail in its entirety and REPLACE with drawing AD4.01 included with this addendum.

E. Sheet E2.1.7, Unit A1 – Foodservice Demolition Floor Plan


1. Demolition Notes: REVISE Note 2 to read, “Remove existing floor receptacles including box and wiring. Abandon conduit below floor. Patch floor to match existing.”

\* \* \* END OF ADDENDUM \* \* \*

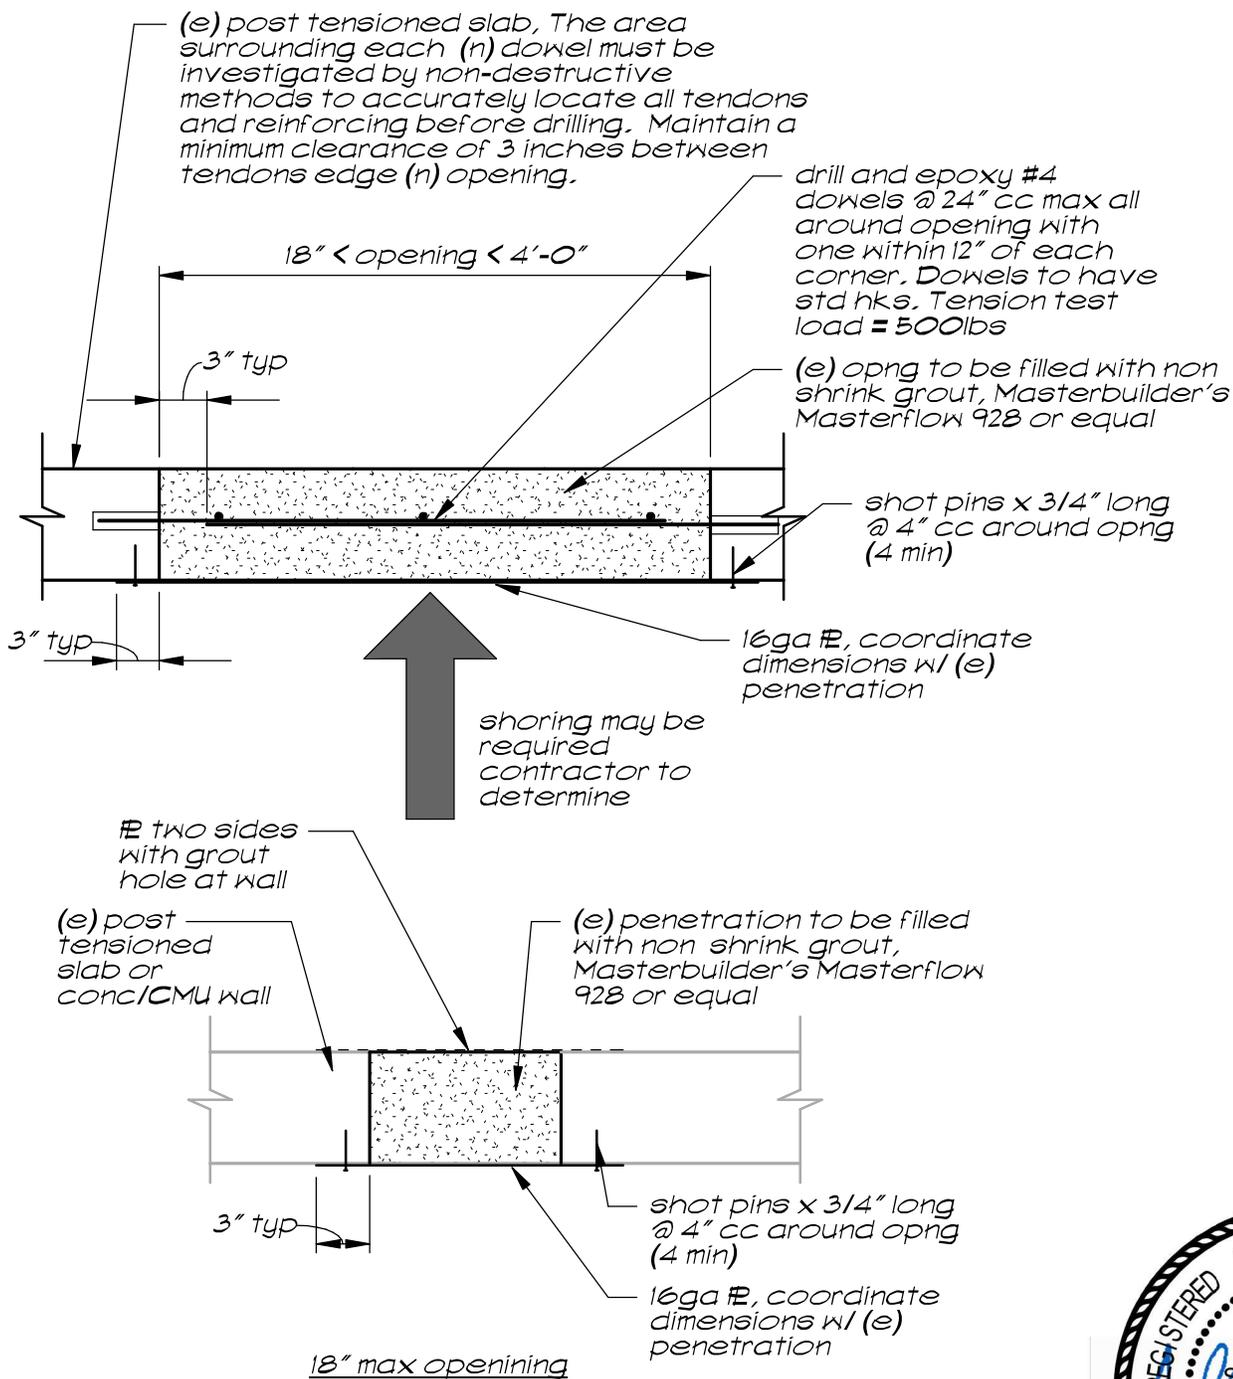

# infill (e) penetration at slab or wall

12  
SI.1.1

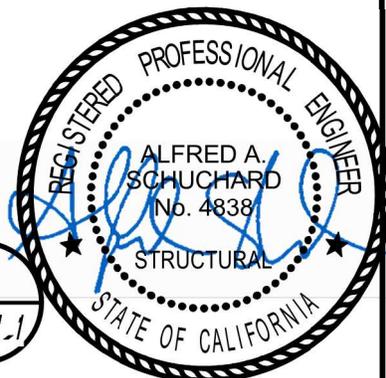

ALL FEATURES, NOTES AND DIMENSIONS NOT SPECIFICALLY SHOWN OR NOTED AS CHANGED SHALL REMAIN AS SHOWN ON PREVIOUSLY ISSUED DOCUMENTS.

ADDENDUM #4

4



INFILL (E) PENETRATION AT SLAB OR WALL  
 SUTTER MIDDLE SCHOOL - HVAC REPLACEMENT  
 SACRAMENTO CITY UNIFIED SCHOOL DISTRICT  
 SACRAMENTO, CA  
 DSA APP.02-115661

DATE: 1/25/18  
 PROJECT NO.: 15-1225  
 SHEET:

**AD4.01**

FILE NO. 34-53