

Project Manual

Shade Structures - Group 1B

Sacramento City Unified School District Sacramento, California RGA Job Number 21-1504 March 30, 2022

Shade Structure at Alice Birney Public Waldorf K-8 School RGA Job Number 21-1504 Page 2

IDENTIFICATION STAMP DIV. OF THE STATE ARCHITECT

APP: 02-119978 INC:

REVIEWED FOR

SS 🗹 FLS 🗹 ACS 🗹

Architect
Rainforth Grau Architects
2101 Capitol Avenue, Suite 100
Sacramento, CA 95816
916.368.7990



Civil Engineer

Warren Consulting Engineers 1117 Windfield Way, Suite 110 El Dorado Hills, CA 95762 (916) 985-1870 Fax (916) 985-1877



Electrical Engineer



Shade Structure at John Bidwell Elementary School RGA Job Number 21-1504 Page 2 IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT

APP: 02-119979 INC:

REVIEWED FOR

SS 🗹 FLS 🗹

FLS 🗹 ACS 🗹

DATE: <u>03/30/2022</u>

Architect

Rainforth Grau Architects 2101 Capitol Avenue, Suite 100 Sacramento, CA 95816 916.368.7990



Civil Engineer

Warren Consulting Engineers 1117 Windfield Way, Suite 110 El Dorado Hills, CA 95762 (916) 985-1870 Fax (916) 985-1877



Electrical Engineer



Shade Structure at Leataata Floyd Elementary School RGA Job Number 21-1504 Page 2

IDENTIFICATION STAMP DIV. OF THE STATE ARCHITECT

APP: 02-119977 INC: REVIEWED FOR

SS 🗹

FLS 🗹 ACS 🗹

DATE: 03/30/2022

Architect

Rainforth Grau Architects 2101 Capitol Avenue, Suite 100 Sacramento, CA 95816 916.368.7990



Civil Engineer

Warren Consulting Engineers 1117 Windfield Way, Suite 110 El Dorado Hills, CA 95762 (916) 985-1870 Fax (916) 985-1877



Electrical Engineer



Shade Structure at John D. Sloat Elementary School RGA Job Number 21-1504 Page 2

IDENTIFICATION STAMP
DIV. OF THE STATE ARCHITECT

APP: 02-119974 INC:

REVIEWED FOR

SS 🗹 FLS 🗹

FLS 🗹 ACS 🗹

03/30/2022

Architect

Rainforth Grau Architects 2101 Capitol Avenue, Suite 100 Sacramento, CA 95816 916.368.7990



Civil Engineer

Warren Consulting Engineers 1117 Windfield Way, Suite 110 El Dorado Hills, CA 95762 (916) 985-1870 Fax (916) 985-1877



Electrical Engineer



PROJECT MANUAL

PROJECT/CONTRACT NUMBER: 454-1B

Shade Structures - Group 1B

SITE	ADDRESS	DSA NO.
Alice Birney Public Waldorf K-8	6251 13th Street, Sacramento, CA 95831	02-119978
John Bidwell Elementary	1730 65th Avenue Sacramento, CA 95822	02-119979
Leataata Floyd Elementary	401 McClatchy Way Sacramento, CA 95818	02-119977
John D Sloat Elementary	7525 Candlewood Way Sacramento, CA 95822	02-119974



SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

DOCUMENT 00 01 10

TABLE OF CONTENTS

Procurement and Contracting Requirements

Division 0	Section 00 01 01 00 01 03 00 01 10 00 01 15 Section 00 11 16	Title Project Title Page Seals Pages Table of Contents List of Drawings and Tables Solicitation Title Notice to Bidders
	<u>Instruct</u>	ions for Procurement
Division 0	<u>Section</u> 00 21 13	<u>Title</u> Instructions to Bidders
	<u>Avai</u>	lable Information
Division 0	<u>Section</u> 00 31 19 00 31 32	<u>Title</u> Existing Conditions Geotechnical Data
	Procurement	t Forms and Supplements
Division 0	Section 00 41 13 00 43 13 00 43 36 00 45 01 00 45 19 00 45 19.01 00 45 26 00 45 46.01 00 45 46.02 00 45 46.03 00 45 46.04 00 45 46.05 00 45 46.05 00 45 46.06 00 45 46.07 00 45 46.08 00 45 46.10 00 45 46.11 00 45 46.12 00 45 49 00 45 90	Title Bid Form and Proposal Bid Bond Designated Subcontractors List Site Visit Certification Non-Collusion Declaration Iran Contracting Act Certification Workers' Compensation Certification Prevailing Wage and Related Labor Requirements Certification Disabled Veteran Business Enterprise Participation Certification Drug-Free Workplace Certification Tobacco-Free Environment Certification Hazardous Materials Certification Lead-Based Materials Certification Imported Materials Certification Criminal Background Investigation/Fingerprinting Certification Buy American Certification Roofing Project Certification Federal Debarment Certification Federal Byrd Anti-Lobbying Certification Registered Subcontractors List Post Bid Interview

Contracting Forms and Supplements

Contracting Forms and Supplements			
Division 0	Section	<u>Title</u>	
	00 52 13	Agreement Form – Stipulated Sum (Single-Prime Contract)	
	00 56 00 00 57 00	Escrow Bid Documentation Escrow Agreement in Lieu of Retention	
	<u>F</u>	Project Forms	
Division 0	Section 00 61 13.13 00 61 13.16 00 63 40 00 63 47 00 63 57 00 63 63 00 65 19.26 00 65 36	Title Performance Bond Payment Bond Allowance Expenditure Directive Form Daily Force Account Report Proposed Change Order Form Change Order Form Agreement and Release of Any and All Claims Guarantee Form	
	Conuiti	tons of the Contract	
Division 0	<u>Section</u> 00 72 13	<u>Title</u> General Conditions – Stipulated Sum (Single-Prime Contract)	
	00 73 13 00 73 56	Special Conditions Hazardous Materials Procedures and Requirements	
	<u>Gene</u>	ral Requirements	
Division 1	<u>Section</u> 01 11 00	<u>Title</u> Summary of Work	
	Price and	Payment Procedures	
Division 1	Section 01 21 00 01 22 00 01 25 13 01 26 00 01 29 00	Title Allowance Alternatives and Unit Prices Product Options and Substitutions Changes in the Work Application for Payment and Conditional and Unconditional Waiver and Release Forms	
	Administrative Requirements		
Division 1	<u>Section</u> 01 31 19 01 32 13 01 33 00 01 35 13.23	Title Project Meetings Scheduling of Work Submittals Site Standards	

Quality Requirements

Division 1	<u>Section</u>	<u>Title</u>
	01 41 00	Regulatory Requirements
	01 42 13	Abbreviations and Acronyms
	01 42 16	Definitions
	01 42 19	References
	01 43 00	Materials and Equipment
	01 45 00	Quality Control

Temporary Facilities and Controls

Division 1	<u>Section</u>	<u>Title</u>
	01 50 00	Temporary Facilities and Controls
	01 50 13	Construction Waste Management and Disposal
	01 52 13	Field Offices

Product Requirements

Division 1	<u>Section</u>	<u>Title</u>
	01 64 00	Owner-Furnished Products
	01 66 00	Product Delivery, Storage and Handling

Execution and Closeout Requirements

<u>Division 1</u>	<u>Section</u>	<u>Title</u>
	01 71 23	Field Engineering
	01 73 29	Cutting and Patching
	01 76 00	Alteration Project Procedures
	01 77 00	Contract Closeout and Final Cleaning
	01 78 23	Operation and Maintenance Data
	01 78 36	Warranties
	01 78 39	Record Documents

Technical Specifications

DIVISION 02 - EXISTING CONDITIONS - NOT USED

DIVISION 03 - CONCRETE - NOT USED

DIVISION 04 - MASONRY - NOT USED

DIVISION 05 - METALS

DIVISION 05 - METALS

SECTION 05 5000 - Metal Fabrications

DIVISION 06 - WOOD, PLASTICS, AND COMPOSITES - NOT USED

DIVISION 07 - THERMAL AND MOISTURE PROTECTION - NOT USED

DIVISION 08 - OPENINGS - NOT USED

DIVISION 09 - FINISHES - NOT USED

DIVISION 10 - SPECIALTIES

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

SECTION 10 1400 - Signage

10 2113 - Plastic Toilet Compartments

10 2813 - Toilet Accessories

DIVISION 11 - EQUIPMENT - NOT USED

DIVISION 12 - FURNISHINGS - NOT USED

DIVISION 13 - SPECIAL CONSTRUCTION - NOT USED

DIVISION 14 - CONVEYING EQUIPMENT - NOT USED

DIVISION 21 - FIRE SUPPRESSION - NOT USED

DIVISION 22 - PLUMBING - NOT USED

DIVISION 23 - HEATING, VENTILATING AND AIR CONDITIONING (HVAC) - NOT USED

DIVISION 26 - ELECTRICAL

SECTION 26 0150 - Electrical Basic Materials and Methods

DIVISION 27 - COMMUNICATIONS - NOT USED

DIVISION 28 - ELECTRONIC SAFETY AND SECURITY - NOT USED

DIVISION 31 - EARTHWORK

SECTION 31 0000 - Earthwork 31 2333 - Trenching and Backfilling

DIVISION 32 - EXTERIOR IMPROVEMENTS

SECTION 32 1200 - Asphalt Concrete Paving

32 1600 - Site Concrete

32 3119 - Decorative Metal Fences and Gates (All-Welded)

DIVISION 33 - UTILITIES - NOT USED

SECTION 33 4000 - Storm Drainage Utilities

DOCUMENT 00 01 15

LIST OF DRAWINGS AND TABLES

DRAWINGS

Alice Birney Public Waldorf K-8

Sheet Index

GENERAL

A0.1 COVER SHEET

A0.2 TYPICAL MOUNTING HEIGHTS AND DETAILS

A0.7 LOCAL FIRE AUTHORITY SITE PLAN

CIVIL

C0.1 CIVIL GENERAL NOTES AND ABBREVIATIONS
C1.1 DEMOLITION, GRADING AND PAVING PLAN

ARCHITECTURAL

A1.1.0 SITE PLAN AND CODE INFORMATION

A1.1.1 PARTIAL SITE PLANS AND DETAILS

A2.1.1 TOILET ROOM DEMOLITION AND IMPROVEMENT PLANS AND INTERIOR ELEVATIONS

ELECTRICAL

E0.1 SYMBOLS, NOTES
E1.1 SITE PLAN - ELECTRICAL

E2.1 ONE LINE DIAGRAM

E3.1 DETAILS

TOTAL SHEET COUNT: 12

John Bidwell Elementary

Sheet Index

GENERAL

A0.1 COVER SHEET

A0.2 TYPICAL MOUNTING HEIGHTS AND DETAILS

A0.7 LOCAL FIRE AUTHORITY SITE PLAN

CIVIL

C0.1 CIVIL GENERAL NOTES AND ABBREVIATIONS

C1.1 DEMOLITION PLAN

C2.1 GRADING AND PAVING PLAN

ARCHITECTURAL

A1.1.0 SITE PLAN AND CODE INFORMATION

A1.1.1 PARTIAL SITE PLANS AND DETAILS

A2.1.1 TOILET ROOM DEMOLITION AND IMPROVEMENT PLANS AND INTERIOR ELEVATIONS

ELECTRICAL

E0.1 SYMBOLS, NOTES
 E1.1 SITE PLAN - ELECTRICAL
 E2.1 ONE LINE DIAGRAM

E3.1 DETAILS

TOTAL SHEET COUNT:13

Leataata Floyd Elementary

Sheet Index

GENERAL

A0.1 COVER SHEET

A0.2 TYPICAL MOUNTING HEIGHTS AND DETAILS

A0.7 LOCAL FIRE AUTHORITY SITE PLAN

CIVIL

C0.1 CIVIL GENERAL NOTES AND ABBREVIATIONS

C1.1 DEMOLITION PLAN

C2.1 GRADING, DRAINAGE AND PAVING PLAN

C3.1 DETAILS AND SECTIONS

ARCHITECTURAL

A1.1.0 SITE PLAN AND CODE INFORMATION
A1.1.1 PARTIAL SITE PLANS AND DETAILS
A1.1.2 PARTIAL SITE PLANS AND DETAILS

A2.1.1 TOILET ROOM DEMOLTION AND IMPROVEMENT PLANS AND INTERIOR ELEVATIONS

ELECTRICAL

E0.1 SYMBOLS, NOTESE1.1 SITE PLAN - ELECTRICALE2.1 ONE LINE DIAGRAM

E3.1 DETAILS
E3.2 DETAILS
TOTAL SHEET COUNT: 16

John D Sloat Elementary

Sheet Index

GENERAL

A0.1 COVER SHEET

A0.2 TYPICAL MOUNTING HEIGHTS AND DETAILS

A0.7 LOCAL FIRE AUTHORITY SITE PLAN

CIVIL

C0.1 CIVIL GENERAL NOTES AND ABBREVIATIONS

C1.1 DEMOLITION PLAN

C2.1 GRADING AND PAVING PLANC3.1 DETAILS AND SECTIONS

ARCHITECTURAL

A1.1.0 SITE PLAN AND CODE INFORMATION
A1.1.1 PARTIAL SITE PLANS AND DETAILS

A2.1.1 TOILET ROOM DEMOLITION AND IMPROVEMENT PLANS AND INTERIOR ELEVATIONS

ELECTRICAL

E0.1 SYMBOLS, NOTES
E1.1 SITE PLAN - ELECTRICAL
E2.1 ONE LINE DIAGRAM

E3.1 DETAILS

TOTAL SHEET COUNT: 14

TABLES - n/a

END OF DOCUMENT

DOCUMENT 00 11 16

NOTICE TO BIDDERS

1. Notice is hereby given that the governing board ("Board") of the Sacramento City Unified School District ("District") will receive sealed bids for the following project, Bid No. 454-1B. ("Project" or "Contract"):

Shade Structures Group 1B

2. The Project consists of:

Selective demolition and construction necessary for the installation of (4) PC Shade Structures, installation of shade structures, installation of (4) concrete pads, upgrades to accessible paths of travel and restrooms and related site work, Hazmat abatement (where required), electrical work and utility relocation and/or replacement.

3. To bid on this Project, the Bidder is required to possess one or more of the following State of California contractors' license(s):

A - General Engineering or B - General Building

The Bidder's license(s) must remain active and in good standing throughout the term of the Contract.

- 4. To bid on this Project, the Bidder is required to be registered as a public works contractor with the Department of Industrial Relations pursuant to the Labor Code.
- 5. Contract Documents will be available on or after April 21, 2022 for review at the District Facilities Office, and may be downloaded from the District's website, using the link www.scusd.edu/construction-projects-bids.
- 6. Sealed bids will be received until 2:00pm on May 16, 2022, at the District Facilities Office, 5735 47th Avenue, Sacramento, California 95824 at or after which time the bids will be opened and publicly read aloud. Any bid that is submitted after this time shall be nonresponsive and returned to the bidder. Any claim by a bidder of error in its bid must be made in compliance with section 5100 et seq. of the Public Contract Code.
- 7. All bids shall be on the form provided by the District. Each bid must conform and be responsive to all pertinent Contract Documents, including, but not limited to, the Instructions to Bidders.
- 8. A bid bond by an admitted surety insurer on the form provided by the District a cashier's check or a certified check, drawn to the order of the Sacramento City Unified School District, in the amount of ten percent (10%) of the total bid price, shall accompany the Bid Form and Proposal, as a guarantee that the Bidder will, within seven (7) calendar days after the date of the Notice of Award, enter into a contract with the District for the performance of the services as stipulated in the bid.
- 9. A mandatory pre-bid conference and site visit will be held at 9:00am on May 3, 2022 at Alice Birney Public Waldorf K-8 School, 6251 13th Street,

<u>Sacramento</u>, <u>California</u>. All participants are required to sign in front of the <u>Administration</u> Building. The site visit is expected to take approximately <u>1 hour</u>. Failure to attend or tardiness will render bid ineligible.

- 10. The successful Bidder shall be required to furnish a 100% Performance Bond and a 100% Payment Bond if it is awarded the Contract for the Work.
- 11. The successful Bidder may substitute securities for any monies withheld by the District to ensure performance under the Contract, in accordance with the provisions of section 22300 of the Public Contract Code.
- 12. The successful bidder will be required to certify that it either meets the Disabled Veteran Business Enterprise ("DVBE") goal of three percent (3%) participation or made a good faith effort to solicit DVBE participation in this Contract if it is awarded the Contract for the Work.
- 13. The Contractor and all Subcontractors under the Contractor shall pay all workers on all Work performed pursuant to this Contract not less than the general prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work as determined by the Director of the Department of Industrial Relations, State of California, for the type of work performed and the locality in which the work is to be performed within the boundaries of the District, pursuant to section 1770 et seq. of the California Labor Code. Prevailing wage rates are also available from the District or on the Internet at: http://www.dir.ca.gov.
- 14. This Project is subject to labor compliance monitoring and enforcement by the Department of Industrial Relations pursuant to Labor Code section 1771.4 and subject to the requirements of Title 8 of the California Code of Regulations. The successful Bidder shall comply with all requirements of Division 2, Part 7, Chapter 1, Articles 1-5 of the Labor Code.
- 15. The District has entered into a Project Labor Agreement that is applicable to this Project. A copy of the Project Labor Agreement is available for review at the District Facilities Office and may be downloaded from the District's website, using the https://www.scusd.edu/pod/project-labor-agreement link. The successful bidder and all subcontractors will be required to agree to be bound by the Project Labor Agreement.
- 16. The Contractor and all Subcontractors under the Contractor shall comply with applicable federal, State, and local requirements relating to COVID-19 or other public health emergency/epidemic/pandemic including, if required, preparing, posting, and implementing a Social Distancing Protocol. Contractor shall further comply with the California Department of Public Health's August 11, 2021, Order requiring workers on District sites to be fully vaccinated against COVID-19, or else subject to weekly testing for COVID-19.
- 17. This Project is funded in whole or in part with federal funds, and therefore the Contractor shall comply with the Davis-Bacon Act, applicable reporting requirements, and any other applicable requirements for federal funding. This Project is also subject to Buy American requirements.
- 18. The District shall award the Contract, if it awards it at all, to the lowest responsive responsible bidder based on:

- A. Based on a process that conceals the identity of bidders from the District until the bids have been ranked.
- 19. The Board reserves the right to reject any and all bids and/or waive any irregularity in any bid received. If the District awards the Contract, the security of unsuccessful bidder(s) shall be returned within sixty (60) days from the time the award is made. Unless otherwise required by law, no bidder may withdraw its bid for ninety (90) days after the date of the bid opening.

END OF DOCUMENT

DOCUMENT 00 21 13

INSTRUCTIONS TO BIDDERS

Bidders shall follow the instructions in this document, and shall submit all documents, forms, and information required for consideration of a bid.

Sacramento City Unified School District ("District") will evaluate information submitted by the apparent low Bidder and, if incomplete or unsatisfactory to District, Bidder's bid may be rejected at the sole discretion of District.

1. Bids are requested for a general construction contract, or work described in general, for the following project ("Project" or "Contract"):

Site adapt and shade structure installation at 4 locations. Selective demolition and construction necessary for the installation of PC Shade Structures, installation of (4) shade structures, installation of (4) concrete pads, upgrades to accessible paths of travel and restrooms and related site work, Hazmat abatement (where required), electrical work and utility relocation and/or replacement.

- 2. A Bidder and its subcontractors must possess the appropriate State of California contractors' license and must maintain the license throughout the duration of the project. Bidders must also be registered as a public works contractor with the Department of Industrial Relations pursuant to the Labor Code. Bids submitted by a contractor who is not properly licensed or registered shall be deemed nonresponsive and will not be considered.
- 3. District will receive sealed bids from bidders as stipulated in the Notice to Bidders.
 - a. All bids must be sealed in an envelope, marked with the name and address of the Bidder, name of the Project, the Project Number and/or bid number, and time of bid opening.
 - b. Bids must be submitted to the District Office by date and time shown in the Notice to Bidders.
 - c. Bids must contain all documents as required herein.
- 4. Bidders are advised that on the date that bids are opened, telephones will not be available at the District Offices for use by bidders or their representatives.
- 5. Bids will be opened at or after the time indicated for receipt of bids.
- 6. Bidders must submit bids on the documents titled Bid Form and Proposal, and must submit all other required District forms. Bids not submitted on the District's required forms shall be deemed nonresponsive and shall not be considered. Additional sheets required to fully respond to requested information are permissible.
- 7. Bidders shall not modify the Bid Form and Proposal or qualify their bids. Bidders shall not submit to the District a re-formatted, re-typed, altered, modified, or otherwise recreated version of the Bid Form and Proposal or other District-provided document.

- 8. Bids shall be clearly written and without erasure or deletions. District reserves the right to reject any bid containing erasures, deletions, or illegible contents.
- 9. Bidders must supply all information required by each Bid Document. Bids must be full and complete. District reserves the right in its sole discretion to reject any bid as nonresponsive as a result of any error or omission in the bid. Bidders must complete and submit all of the following documents with the Bid Form and Proposal:
 - a. Bid Bond on the District's form, or other security.
 - b. Designated Subcontractors List.
 - c. Site Visit Certification, if a site visit was required.
 - d. Non-Collusion Declaration.
 - e. Iran Contracting Act Certification, if contract value is \$1,000,000 or more.
 - f. Federal Debarment Certification.
 - g. Federal Byrd Anti-Lobbying Certification, if contract value is \$100,000 or more.
- 10. Bidders must submit with their bids cash, a cashier's check or a certified check payable to District, or a bid bond by an admitted surety insurer of not less than ten percent (10%) of amount of Base Bid, plus all additive alternates ("Bid Bond"). If Bidder chooses to provide a Bid Bond as security, Bidder must use the required form of corporate surety provided by District. The Surety on Bidder's Bid Bond must be an insurer admitted in the State of California and authorized to issue surety bonds in the State of California. Bids submitted without necessary bid security will be deemed nonresponsive and will not be considered.
- 11. If Bidder to whom the Contract is awarded fails or neglects to enter into the Contract and submit required bonds, insurance certificates, and all other required documents, within **SEVEN** (7) calendar days after the date of the Notice of Award, District may deposit Bid Bond, cash, cashier's check, or certified check for collection, and proceeds thereof may be retained by District as liquidated damages for failure of Bidder to enter into Contract, in the sole discretion of District. It is agreed that calculation of damages District may suffer as a result of Bidder's failure to enter into the Contract would be extremely difficult and impractical to determine and that the amount of the Bidder's required bid security shall be the agreed and conclusively presumed amount of damages.
- 12. Bidders must submit with the bid the Designated Subcontractors List for those subcontractors who will perform any portion of Work, including labor, rendering of service, or specially fabricating and installing a portion of the Work or improvement according to detailed drawings contained in the plans and specifications, in excess of one half of one percent (0.5%) of total bid. Failure to submit this list when required by law shall result in bid being deemed nonresponsive and the bid will not be considered.
- 13. All of the listed subcontractors are required to be registered as a public works contractor with the Department of Industrial Relations pursuant to the Labor Code.

- a. An inadvertent error in listing the California contractor license number on the Designated Subcontractors List shall not be grounds for filing a bid protest or grounds for considering the bid nonresponsive if the correct contractor's license number is submitted to the District within 24 hours after the bid opening and the corrected number corresponds with the submitted name and location for that subcontractor.
- b. An inadvertent error listing an unregistered subcontractor shall not be grounds for filing a bid protest or grounds for considering the bid nonresponsive provided that any of the following apply:
 - (1) The subcontractor is registered prior to the bid opening.
 - (2) The subcontractor is registered and has paid the penalty registration fee within 24 hours after the bid opening.
 - (3) The subcontractor is replaced by another registered subcontractor pursuant to Public Contract Code section 4107.
- 14. If a mandatory pre-bid conference and site visit ("Site Visit") is required as referenced in the Notice to Bidders, then Bidders must submit the Site Visit Certification with their Bid. District will transmit to all prospective Bidders of record such Addenda as District in its discretion considers necessary in response to questions arising at the Site Visit. Oral statements shall not be relied upon and will not be binding or legally effective. Addenda issued by the District as a result of the Site Visit, if any, shall constitute the sole and exclusive record and statement of the results of the Site Visit.
- 15. Bidders shall submit the Non-Collusion Declaration with their bids. Bids submitted without the Non-Collusion Declaration shall be deemed nonresponsive and will not be considered.
- 16. The Contractor and all Subcontractors under the Contractor shall pay all workers on all work performed pursuant to the Contract not less than the general prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work as determined by the Director of the Department of Industrial Relations, State of California, for the type of work performed and the locality in which the work is to be performed within the boundaries of the District, pursuant to sections 1770 et seq. of the California Labor Code. Copies of the general prevailing rates of per diem wages for each craft, classification, or type of worker needed to execute the Contract, as determined by Director of the Department of Industrial Relations, are available upon request at the District's principal office. Prevailing wage rates are also available on the internet at http://www.dir.ca.gov.

Since the Project is funded in whole or in part with federal funds, the Contractor and all Subcontractors under the Contractor shall comply with the Davis-Bacon Act, applicable reporting requirements, and any other applicable requirements for federal funding. If a conflict exists with a state requirement, the more stringent provision shall control.

17. The District has entered into a Project Labor Agreement that is applicable to this Project. A copy of the Project Labor Agreement is available for review at the District Facilities Office and may be downloaded from the District's website, using the https://www.scusd.edu/pod/project-labor-agreement link. The successful bidder and

- all subcontractors will be required to agree to be bound by the Project Labor Agreement.
- 18. Section 17076.11 of the Education Code requires school districts using funds allocated pursuant to the State of California School Facility Program for the construction and/or modernization of school building(s) to have a participation goal for disabled veteran business enterprises ("DVBE") of at least three percent (3%) per year of the overall dollar amount expended on projects that receive state funding or demonstrate its good faith effort to solicit DVBE participation in this Contract. In order to meet this requirement by demonstrating a good faith effort, Bidder must advertise for DVBE-certified subcontractors and suppliers before submitting its Bid. For any project that is at least partially state-funded, the lowest responsive responsible Bidder awarded the Contract must submit certification of compliance with the procedures for implementation of DVBE contracting goals with its signed Agreement. DVBE Certification form is attached. Do not submit this form with your Bid.
- 19. Submission of bid signifies careful examination of Contract Documents and complete understanding of the nature, extent, and location of Work to be performed. Bidders must complete the tasks listed below as a condition to bidding, and submission of a bid shall constitute the Bidder's express representation to District that Bidder has fully completed the following:
 - a. Bidder has visited the Site, if required, and has examined thoroughly and understood the nature and extent of the Contract Documents, Work, Site, locality, actual conditions, as-built conditions, and all local conditions and federal, state and local laws, and regulations that in any manner may affect cost, progress, performance, or furnishing of Work or that relate to any aspect of the means, methods, techniques, sequences, or procedures of construction to be employed by Bidder and safety precautions and programs incident thereto;
 - b. Bidder has conducted or obtained and has understood all examinations, investigations, explorations, tests, reports, and studies that pertain to the subsurface conditions, as-built conditions, underground facilities, and all other physical conditions at or contiguous to the Site or otherwise that may affect the cost, progress, performance, or furnishing of Work, as Bidder considers necessary for the performance or furnishing of Work at the Contract Sum, within the Contract Time, and in accordance with the other terms and conditions of Contract Documents, including specifically the provisions of the General Conditions; and no additional examinations, investigations, explorations, tests, reports, studies, or similar information or data are or will be required by Bidder for such purposes;
 - c. Bidder has correlated its knowledge and the results of all such observations, examinations, investigations, explorations, tests, reports, and studies with the terms and conditions of the Contract Documents;
 - d. Bidder has given the District prompt written notice of all conflicts, errors, ambiguities, or discrepancies that it has discovered in or among the Contract Documents and the actual conditions, and the written resolution(s) thereof by the District is/are acceptable to Bidder;

- e. Bidder has made a complete disclosure in writing to the District of all facts bearing upon any possible interest, direct or indirect, that Bidder believes any representative of the District or other officer or employee of the District presently has or will have in this Contract or in the performance thereof or in any portion of the profits thereof;
- f. Bidder must, prior to bidding, perform the work, investigations, research, and analysis required by this document and that Bidder represented in its Bid Form and Proposal and the Agreement that it performed prior to bidding. Contractor under this Contract is charged with all information and knowledge that a reasonable bidder would ascertain from having performed this required work, investigation, research, and analysis. Bid prices must include entire cost of all work "incidental" to completion of the Work.
- g. Conditions Shown on the Contract Documents: Information as to underground conditions, as-built conditions, or other conditions or obstructions, indicated in the Contract Documents, e.g., on Drawings or in Specifications, has been obtained with reasonable care, and has been recorded in good faith. However, District only warrants, and Bidder may only rely, on the accuracy of limited types of information.
 - (1) As to above-ground conditions or as-built conditions shown or indicated in the Contract Documents, there is no warranty, express or implied, or any representation express or implied, that such information is correctly shown or indicated. This information is verifiable by independent investigation and Bidder is required to make such verification as a condition to bidding. In submitting its Bid, Bidder shall rely on the results of its own independent investigation. In submitting its Bid, Bidder shall not rely on District-supplied information regarding above-ground conditions or as-built conditions.
 - (2) As to any subsurface condition shown or indicated in the Contract Documents, Bidder may rely only upon the general accuracy of actual reported depths, actual reported character of materials, actual reported soil types, actual reported water conditions, or actual obstructions shown or indicated. District is not responsible for the completeness of such information for bidding or construction; nor is District responsible in any way for any conclusions or opinions that the Bidder has drawn from such information; nor is the District responsible for subsurface conditions that are not specifically shown (for example, District is not responsible for soil conditions in areas contiguous to areas where a subsurface condition is shown).
- h. Conditions Shown in Reports and Drawings Supplied for Informational Purposes: Reference is made to the document entitled Geotechnical Data, and the document entitled Existing Conditions, for identification of:
 - (1) Subsurface Conditions: Those reports of explorations and tests of subsurface conditions at or contiguous to the Site that have been utilized by Architect in preparing the Contract Documents; and
 - (2) Physical Conditions: Those drawings of physical conditions in or relating to existing surface or subsurface structures at or contiguous to

- the Site that has been utilized by Architect in preparing the Contract Documents.
- (3) These reports and drawings are <u>not</u> Contract Documents and, except for any "technical" data regarding subsurface conditions specifically identified in Geotechnical Data and Existing Conditions, and underground facilities data, Bidder may not in any manner rely on the information in these reports and drawings. Subject to the foregoing, Bidder must make its own independent investigation of all conditions affecting the Work and must not rely on information provided by District.
- 20. Bids shall be based on products and systems specified in Contract Documents or listed by name in Addenda. Whenever in the Specifications any materials, process, or article is indicated or specified by grade, patent, or proprietary name, or by name of manufacturer, that Specification shall be deemed to be followed by the words "or equal." Bidder may, unless otherwise stated, offer any material, process, or article that shall be substantially equal or better in every respect to that so indicated or specified. The District is not responsible and/or liable in any way for a Contractor's damages and/or claims related, in any way, to that Contractor's basing its bid on any requested substitution that the District has not approved in advance and in writing. Contractors and materials suppliers who submit requests for substitutions prior to the award of the Contract must do so in writing and in compliance with Public Contract Code section 3400. All requests must comply with the following:
 - a. District must receive any notice of request for substitution of a specified item a minimum of **TEN** (10) calendar days prior to bid opening. The Successful Bidder will not be allowed to substitute specified items unless properly noticed.
 - b. Within 35 days after the date of the Notice of Award, the Successful Bidder shall submit data substantiating the request(s) for all substitution(s) containing sufficient information to assess acceptability of product or system and impact on Project, including, without limitation, the requirements specified in the Special Conditions and the Specifications. Insufficient information shall be grounds for rejection of substitution.
 - c. Approved substitutions, if any, shall be listed in Addenda. District reserves the right not to act upon submittals of substitutions until after bid opening.
 - d. Substitutions may be requested after Contract has been awarded only if indicated in and in accordance with requirements specified in the Special Conditions and the Specifications.
- 21. Bidders may examine any available "as-built" drawings of previous work by giving District reasonable advance notice. District will not be responsible for accuracy of "as-built" drawings. The document entitled Existing Conditions applies to all supplied "as-built" drawings.
- 22. All questions about the meaning or intent of the Contract Documents are to be directed via email to the District to <u>ICS</u>, (<u>dave@icscm.com</u>). Interpretations or clarifications considered necessary by the District in response to such questions will be issued in writing by Addenda and emailed, faxed, mailed, or delivered to all parties recorded by the District as having received the Contract Documents or posted

- on the District's website at www.scusd.edu/construction-projects-bids. Questions received less than SEVEN (7) calendar days prior to the date for opening bids may not be answered. Only questions answered by formal written Addenda will be binding. Oral and other interpretations or clarifications will be without legal effect.
- 23. Addenda may also be issued to modify other parts of the Contract Documents as deemed advisable by the District.
- 24. Each Bidder must acknowledge each Addendum in its Bid Form and Proposal by number or its Bid shall be considered non-responsive. Each Addendum shall be part of the Contract Documents. A complete listing of Addenda may be secured from the District.
- 25. This Contract may include alternates. Alternates are defined as alternate products, materials, equipment, systems, methods, or major elements of the construction that may, at the District's option and under terms established in the Contract and pursuant to section 20103.8 of the Public Contract Code, be selected for the Work.
- 26. The District shall award the Contract, if it awards it at all, to the lowest responsive responsible bidder based on the criteria as indicated in the Notice to Bidders. In the event two or more responsible bidders submit identical bids, the District shall select the Bidder to whom to award the Contract by lot.
- 27. Discrepancies between written words and figures, or words and numerals, will be resolved in favor of figures or numerals.
- 28. Bidders in contention for contract awards shall be required to attend a Post-Bid interview, which will be set within three (3) calendar days following bid opening. A duly authorized representative of the apparent low bidder is required to attend the Post Bid Interview, in person. The apparent low bidder's authorized representative(s) must have (1) knowledge of how the bid submitted was prepared, (2) the person responsible for supervising performance of the Work, and (3) the authority to bind the apparent low bidder. Failure to attend the Post Bid Interview as scheduled will be considered just cause for the District to reject the Bid as nonresponsive.
- 29. Any bid protest by any Bidder regarding any other bid must be submitted in writing to the District, before 5:00 p.m. of the **THIRD** (**3rd**) business day following bid opening.
 - a. Only a Bidder who has actually submitted a bid, and who could be awarded the Contract if the bid protest is upheld, is eligible to submit a bid protest. Subcontractors are not eligible to submit bid protests. A Bidder may not rely on the bid protest submitted by another Bidder.
 - b. A bid protest must contain a complete statement of any and all bases for the protest and all supporting documentation. Materials submitted after the bid protest deadline will not be considered.
 - c. The protest must refer to the specific portions of all documents that form the basis for the protest.
 - (1) Without limitation to any other basis for protest, an inadvertent error in listing the California contractor's license number on the Designated

Subcontractors List shall not be grounds for filing a bid protest or grounds for considering the bid nonresponsive if the correct contractor's license number is submitted to the District within 24 hours after the bid opening and the corrected number corresponds with the submitted name and location for that subcontractor.

- (2) Without limitation to any other basis for protest, an inadvertent error listing an unregistered subcontractor shall not be grounds for filing a bid protest or grounds for considering the bid nonresponsive provided that any of the following apply:
 - (i) The subcontractor is registered prior to the bid opening.
 - (ii) The subcontractor is registered and has paid the penalty registration fee within 24 hours after the bid opening.
 - (iii) The subcontractor is replaced by another registered subcontractor pursuant to Public Contract Code section 4107.
- d. The protest must include the name, address and telephone number of the person representing the protesting party.
- e. The party filing the protest must concurrently transmit a copy of the protest and any attached documentation to all other parties with a direct financial interest that may be adversely affected by the outcome of the protest. Such parties shall include all other bidders or proposers who appear to have a reasonable prospect of receiving an award depending upon the outcome of the protest.
- f. The procedure and time limits set forth in this paragraph are mandatory and are each bidder's sole and exclusive remedy in the event of bid protest. Failure to comply with these procedures shall constitute a waiver of any right to further pursue the bid protest, including filing a Government Code Claim or legal proceedings.
- 30. The Bidder to whom Contract is awarded shall execute and submit the following documents by 5:00 p.m. of the **SEVENTH** (7th) calendar day following the date of the Notice of Award. Failure to properly and timely submit these documents entitles District to reject the bid as nonresponsive.
 - a. Agreement: To be executed by successful Bidder. Submit four (4) copies, each bearing an original signature.
 - b. Performance Bond (100%): On the form provided in the Contract Documents and fully executed as indicated on the form.
 - c. Payment Bond (Contractor's Labor and Material Bond) (100%): On the form provided in the Contract Documents and fully executed as indicated on the form.
 - d. Insurance Certificates and Endorsements as required.
 - e. Workers' Compensation Certification.

- f. Prevailing Wage and Related Labor Requirements Certification.
- g. Disabled Veteran Business Enterprise Participation Certification.
- h. Drug-Free Workplace Certification.
- i. Tobacco-Free Environment Certification.
- j. Hazardous Materials Certification.
- k. Lead-Based Materials Certification.
- I. Imported Materials Certification.
- m. Criminal Background Investigation/Fingerprinting Certification.
- n. Buy American Certification.
- o. Registered Subcontractors List: Must include Department of Industrial Relations (DIR) registration number of each subcontractor for all tiers.
- 31. Time for Completion: District may issue a Notice to Proceed within **NINETY** (90) days from the date of the Notice of Award. Once Contractor has received the Notice to Proceed, Contractor shall complete the Work within the period of time indicated in the Contract Documents.
 - a. In the event that the District desires to postpone issuing the Notice to Proceed beyond this 90-day period, it is expressly understood that with reasonable notice to the Contractor, the District may postpone issuing the Notice to Proceed.
 - b. It is further expressly understood by Contractor that Contractor shall not be entitled to any claim of additional compensation as a result of the postponement of the issuance of the Notice to Proceed beyond a 90-day period. If the Contractor believes that a postponement of issuance of the Notice to Proceed will cause a hardship to the Contractor, the Contractor may terminate the Contract. Contractor's termination due to a postponement beyond this 90-day period shall be by written notice to District within **TEN** (10) calendar days after receipt by Contractor of District's notice of postponement.
 - c. It is further understood by the Contractor that in the event that Contractor terminates the Contract as a result of postponement by the District, the District shall only be obligated to pay Contractor for the Work that Contractor had performed at the time of notification of postponement and which the District had in writing authorized Contractor to perform prior to issuing a Notice to Proceed.
 - d. Should the Contractor terminate the Contract as a result of a notice of postponement, District shall have the authority to award the Contract to the next lowest responsive responsible bidder.
- 32. District reserves the right to reject any or all bids, including without limitation the right to reject any or all nonconforming, nonresponsive, unbalanced, or conditional

bids, to re-bid, and to reject the bid of any bidder if District believes that it would not be in the best interest of the District to make an award to that bidder, whether because the bid is not responsive or the bidder is unqualified or of doubtful financial ability or fails to meet any other pertinent standard or criteria established by District. District also reserves the right to waive any inconsequential deviations or irregularities in any bid. For purposes of this paragraph, an "unbalanced bid" is one having nominal prices for some work items and/or enhanced prices for other work items.

- 33. It is the policy of the District that no qualified person shall be excluded from participating in, be denied the benefits of, or otherwise be subjected to discrimination in any consideration leading to the award of contract, based on race, color, gender, sexual orientation, political affiliation, age, ancestry, religion, marital status, national origin, medical condition or disability. The Successful Bidder and its subcontractors shall comply with applicable federal and state laws, including, but not limited to the California Fair Employment and Housing Act, beginning with Government Code section 12900, and Labor Code section 1735.
- 34. Prior to the award of Contract, District reserves the right to consider the responsibility of the Bidder. District may conduct investigations as District deems necessary to assist in the evaluation of any bid and to establish the responsibility, including, without limitation, qualifications and financial ability of Bidders, proposed subcontractors, suppliers, and other persons and organizations to perform and furnish the Work in accordance with the Contract Documents to District's satisfaction within the prescribed time.
- 35. Bidder expressly acknowledges that it is familiar with and capable of complying with applicable federal, State, and local requirements relating to COVID-19 or other public health emergency/epidemic/pandemic including, if required, preparing, posting, and implementing a Social Distancing Protocol, and such costs shall be included in the bid as an allowance. Any unused portion of the allowance designated for COVID-19 or other public health emergency/epidemic/pandemic compliance will revert back to the District documented by a deductive change order.

END OF DOCUMENT

DOCUMENT 00 31 19

EXISTING CONDITIONS

1. Summary

This document describes existing conditions at or near the Project, and use of information available regarding existing conditions. This document is **not** part of the Contract Documents. See General Conditions for definition(s) of terms used herein.

- 2. Reports and Information on Existing Conditions
 - a. Documents providing a general description of the Site and conditions of the Work may have been collected by the Sacramento City Unified School District ("District"), its consultants, contractors, and tenants. These documents may, but are not required to, include previous contracts, contract specifications, tenant improvement contracts, as-built drawings, utility drawings, and information regarding underground facilities.
 - b. Information regarding existing conditions may be inspected at the District offices or the Construction Manager's offices, if any, and copies may be obtained at cost of reproduction and handling upon Bidder's agreement to pay for such copies. These reports, documents, and other information are <u>not</u> part of the Contract Documents. These reports, documents, and other information do <u>not</u> excuse Contractor from fulfilling Contractor's obligation to independently investigate any or all existing conditions or from using reasonable prudent measures to avoid damaging existing improvements.
 - c. Information regarding existing conditions may also be included in the Project Manual, but shall **not** be considered part of the Contract Documents.
 - d. Prior to commencing this Work, Contractor and the District's representative shall survey the Site to document the condition of the Site. Contractor will record the survey in digital videotape format and provide an electronic copy to the District within fourteen (14) days of the survey.
 - e. Contractor may also document any pre-existing conditions in writing, provided that both the Contractor and the District's representative agree on said conditions and sign a memorandum documenting the same.
 - f. The reports and other data or information regarding existing conditions and underground facilities at or contiguous to the Project are the following:
 - (1) Original Construction Drawings.
 - (2) Survey of Site.
 - (3) Geotechnical Report(s).
 - (4) Hazardous Material Report(s).
 - (5) Videotaped Survey(s).

3. Use of Information

- Information regarding existing conditions was obtained only for use of District and its consultants, contractors, and tenants for planning and design and is not part of the Contract Documents.
- b. District does not warrant, and makes no representation regarding, the accuracy or thoroughness of any information regarding existing conditions. Bidder represents and agrees that in submitting a bid it is not relying on any information regarding existing conditions supplied by District.
- c. Under no circumstances shall District be deemed to warrant or represent existing above-ground conditions, as-built conditions, or other actual conditions, verifiable by independent investigation. These conditions are verifiable by Bidder by the performance of its own independent investigation that Bidder must perform as a condition to bidding and Bidder should not and shall not rely on this information or any other information supplied by District regarding existing conditions.
- d. Any information shown or indicated in the reports and other data supplied herein with respect to existing underground facilities at or contiguous to the Project may be based upon information and data furnished to District by the District's employees and/or consultants or builders of such underground facilities or others. District does not assume responsibility for the completeness of this information, and Bidder is solely responsible for any interpretation or conclusion drawn from this information.
- e. District shall be responsible only for the general accuracy of information regarding underground facilities, and only for those underground facilities that are owned by District, and only where Bidder has conducted the independent investigation required of it pursuant to the Instructions to Bidders, and discrepancies are not apparent.

4. Investigations/Site Examinations

- a. Before submitting a bid, each Bidder is responsible for conducting or obtaining any additional or supplementary examinations, investigations, explorations, tests, studies, and data concerning conditions (surface, subsurface, and underground facilities) at or contiguous to the Site or otherwise, that may affect cost, progress, performance, or furnishing of Work or that relate to any aspect of the means, methods, techniques, sequences, or procedures of construction to be employed by Bidder and safety precautions and programs incident thereto or that Bidder deems necessary to determine its Bid for performing and furnishing the Work in accordance with the time, price, and other terms and conditions of Contract Documents.
- b. On request, District will provide each Bidder access to the Site to conduct such examinations, investigations, explorations, tests, and studies, as each Bidder deems necessary for submission of a bid. Bidders must fill all holes and clean up and restore the Site to its former condition upon completion of its explorations, investigations, tests, and studies. Such investigations and Site examinations may be performed during any and all Site visits indicated in the Notice to Bidders and only under the provisions of the Contract

Documents, including, but not limited to, proof of insurance and obligation to indemnify against claims arising from such work, and District's prior approval.

END OF DOCUMENT

DOCUMENT 00 31 32

GEOTECHNICAL DATA

1. Summary

This document describes geotechnical data at or near the Project that is in the District's possession available for Contractor's review, and use of data resulting from various investigations. This document is **not** part of the Contract Documents. See General Conditions for definition(s) of terms used herein.

2. Geotechnical Reports

- a. Geotechnical reports may have been prepared for and around the Site and/or in connection with the Work by soil investigation engineers hired by Sacramento City Unified School District ("District"), and its consultants, contractors, and tenants.
- Geotechnical reports may be inspected at the District offices or the Construction Manager's offices, if any, and copies may be obtained at cost of reproduction and handling upon Bidder's agreement to pay for such copies. These reports are <u>not</u> part of the Contract Documents.
- c. The reports and drawings of physical conditions that may relate to the Project are the following:

N/A

3. Use of Data

- a. Geotechnical data were obtained only for use of District and its consultants, contractors, and tenants for planning and design and are <u>not</u> a part of Contract Documents.
- b. Except as expressly set forth below, District does not warrant, and makes no representation regarding, the accuracy or thoroughness of any geotechnical data. Bidder represents and agrees that in submitting a bid it is not relying on any geotechnical data supplied by District, except as specifically allowed below.
- c. Under no circumstances shall District be deemed to make a warranty or representation of existing above ground conditions, as-built conditions, geotechnical conditions, or other actual conditions verifiable by independent investigation. These conditions are verifiable by Bidder by the performance of its own independent investigation that Bidder should perform as a condition to bidding and Bidder must not and shall not rely on information supplied by District.

- 4. Limited Reliance Permitted on Certain Information
 - a. Reference is made herein for identification of:

Reports of explorations and tests of subsurface conditions at or contiguous to the Site that have been utilized by District in preparation of the Contract Documents.

Drawings of physical conditions in or relating to existing subsurface structures (except underground facilities) that are at or contiguous to the Site and have been utilized by District in preparation of the Contract Documents.

- b. Bidder may rely upon the general accuracy of the "technical data" contained in the reports and drawings identified above, but only insofar as it relates to subsurface conditions, provided Bidder has conducted the independent investigation required pursuant to Instructions to Bidders, and discrepancies are not apparent. The term "technical data" in the referenced reports and drawings shall be limited as follows:
 - (1) The term "technical data" shall include actual reported depths, reported quantities, reported soil types, reported soil conditions, and reported material, equipment or structures that were encountered during subsurface exploration. The term "technical data" does not include, and Bidder may not rely upon, any other data, interpretations, opinions or information shown or indicated in such drawings or reports that otherwise relate to subsurface conditions or described structures.
 - (2) The term "technical data" shall not include the location of underground facilities.
 - (3) Bidder may not rely on the completeness of reports and drawings for the purposes of bidding or construction. Bidder may rely upon the general accuracy of the "technical data" contained in such reports or drawings.
 - (4) Bidder is solely responsible for any interpretation or conclusion drawn from any "technical data" or any other data, interpretations, opinions, or information provided in the identified reports and drawings.
- 5. Investigations/Site Examinations
 - a. Before submitting a bid, each Bidder is responsible for conducting or obtaining any additional or supplementary examinations, investigations, explorations, tests, studies, and data concerning conditions (surface, subsurface, and underground facilities) at or contiguous to the Site or otherwise, that may affect cost, progress, performance, or furnishing of Work or that relate to any aspect of the means, methods, techniques, sequences, or procedures of construction to be employed by Bidder and safety precautions and programs incident thereto or that Bidder deems necessary to determine its Bid for performing and furnishing the Work in accordance with the time, price, and other terms and conditions of Contract Documents.
 - b. On request, District will provide each Bidder access to the Site to conduct such examinations, investigations, explorations, tests, and studies, as each

Bidder deems necessary for submission of a bid. Bidders must fill all holes and clean up and restore the Site to its former condition upon completion of its explorations, investigations, tests, and studies. Such investigations and Site examinations may be performed during any and all Site visits indicated in the Notice to Bidders and only under the provisions of the Contract Documents, including, but not limited to, proof of insurance and obligation to indemnify against claims arising from such work, and District's prior approval.

END OF DOCUMENT

DOCUMENT 00 41 13

BID FORM AND PROPOSAL

"Owner")	Unified School Distri	ct ("District" or
From: (Proper Name of Bidder)		
The undersigned declares that Bidder has read a including, without limitation, the Notice to Bidder agrees and proposes to furnish all necessary laborates and furnish all work in accordance with the terms. Documents, including, without limitation, the Dragon for the following project known as:	rs and the Instructio or, materials, and ec s and conditions of t	ns to Bidders, and quipment to perform he Contract
("Project" or "Contract") and will accept in full palump sum amount, all taxes included:	ayment for that Work	k the following total
Alice Birney Public Waldorf K-8		
BASE BID	dollars	\$
Allowance:		
Twenty-five thousand and no/100 Allowance	dollars	\$25,000.00
Additive/Deductive Alternates:		
Bid Alternate #1		
Bid Additive/Deductive	dollars	\$
TOTAL for Alice Birney Public Waldorf K-8	(Base bid + Allowand	e + Bid Alternate #1)
TOTAL BID	dollars	\$

John Bidwell Elementary		
	dollars	\$
BASE BID		
Allowance:		
Twenty-five thousand and no/100 Allowance	dollars	\$ 25,000.00
Additive/Deductive Alternates:		
Bid Alternate #1		
	dollars	\$
Bid Additive/Deductive		
TOTAL for John Bidwell Elementary (Base bid + Allowance + Bid Alternate #1)		
TOTAL BID	dollars	\$
<u>Leataata Floyd Elementary</u>		
	dollars	\$
BASE BID		
Allowance:		
Twenty-five thousand and no/100	dollars	\$25,000.00
Allowance		
Additive/Deductive Alternates:		
Bid Alternate #1		
	dollars	\$
Bid Additive/Deductive		

TOTAL for Leataata Floyd Elementary (Base bid + Allowance + Bid Alternate #1)

______dollars \$ ______

John D. Sloat Elementary

BASE BID	_ dollars	\$
Allowance:		
Twenty-five thousand and no/100 Allowance	_ dollars	\$25,000.00
Additive/Deductive Alternates:		
Bid Alternate #1		
Bid Additive/Deductive	_ dollars	\$
TOTAL for John D. Sloat Elementary (Base bid + Allo	wance + Bid <i>A</i>	Alternate #1)
	_ dollars	\$
TOTAL BID		

TOTAL FOR SHADE STRUCTURES GROUP 1B

TOTAL BID – ALICE BIRNEY PUBLIC WALDORF K-8	dollars	\$
TOTAL BID – JOHN BIDWELL ELEMENTARY	dollars	\$
TOTAL BID – LEATAATA FLOYD ELEMENTARY	dollars	\$
TOTAL BID – JOHN D. SLOAT ELEMENTARY	dollars	\$
TOTAL BID - FOR ALL SITES	_ dollars	\$

Descriptions of alternates are primarily scope definitions and do not necessarily detail the full range of materials and processes needed to complete the construction.

[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK]

Additional Detail Regarding Calculation of Base Bid

6. <u>Allowance</u>. The Bidder's Base Bid and each alternate shall include a \$25,000.00 per site allowance for Unforeseen Conditions and complying with applicable federal, State, and local requirements relating to COVID-19 or other public health emergency/epidemic/pandemic.

The above allowance shall only be allocated for unforeseen items or COVID-19 or other public health emergency/epidemic/pandemic compliance relating to the Work. Contractor shall not bill for or be due any portion of this allowance unless the District has identified specific work, Contractor has submitted a price for that work or the District has proposed a price for that work, the District has accepted the cost for that work, and the District has prepared an Allowance Expenditure Directive incorporating that work. Contractor hereby authorizes the District to execute a unilateral deductive change order at or near the end of the Project for all or any portion of the allowance not allocated. Any unused portion of the allowance will revert back to the District documented by a deductive change order.

- 7. The undersigned has reviewed the Work outlined in the Contract Documents and fully understands the scope of Work required in this Proposal, understands the construction and project management function(s) is described in the Contract Documents, and that each Bidder who is awarded a contract shall be in fact a prime contractor, not a subcontractor, to the District, and agrees that its Proposal, if accepted by the District, will be the basis for the Bidder to enter into a contract with the District in accordance with the intent of the Contract Documents.
- 8. The undersigned has notified the District in writing of any discrepancies or omissions or of any doubt, questions, or ambiguities about the meaning of any of the Contract Documents, and has contacted the Construction Manager before bid date to verify the issuance of any clarifying Addenda.
- 9. The undersigned agrees to commence work under this Contract on the date established in the Contract Documents and to complete all work within the time specified in the Contract Documents.
- 10. The liquidated damages clause of the General Conditions and Agreement is hereby acknowledged.
- 11. It is understood that the District reserves the right to reject this bid and that the bid shall remain open to acceptance and is irrevocable for a period of ninety (90) days.
- 12. The following documents are attached hereto:
 - Bid Bond on the District's form or other security
 - Designated Subcontractors List
 - Site Visit Certification
 - Non-Collusion Declaration
 - Iran Contracting Act Certification

 No. ______, Dated ______
 No. ______, Dated _______

 No. ______, Dated _______
 No. ______, Dated _______

 No. ______, Dated _______
 No. ______, Dated _________

Receipt and acceptance of the following Addenda is hereby acknowledged:

- 14. Bidder acknowledges that the license required for performance of the Work is a **A-General Engineering or B General Building** license.
- 15. Bidder hereby certifies that Bidder is able to furnish labor that can work in harmony with all other elements of labor employed or to be employed on the Work.
- 16. Bidder specifically acknowledges and understands that if it is awarded the Contract, that it shall perform the Work of the Project while complying with all requirements of the Department of Industrial Relations.
- 17. Bidder hereby certifies that its bid includes sufficient funds to permit Bidder to comply with all local, state or federal labor laws or regulations during the Project, including payment of prevailing wage, and that Bidder will comply with the provisions of Labor Code section 2810(d) if awarded the Contract
- 18. [Bidder agrees to comply with all requirements of the Project Labor Agreement].
- 19. Bidder specifically acknowledges and understands that if it is awarded the Contract, that it shall perform the Work of the Project while complying with the Davis Bacon Act, applicable reporting requirements, and any and all other applicable requirements for federal funding. If a conflict exists, the more stringent requirement shall control.
- 20. Bidder represents that it is competent, knowledgeable, and has special skills with respect to the nature, extent, and inherent conditions of the Work to be performed. Bidder further acknowledges that there are certain peculiar and inherent conditions existent in the construction of the Work that may create, during the Work, unusual or peculiar unsafe conditions hazardous to persons and property.
- 21. Bidder expressly acknowledges that it is aware of such peculiar risks and that it has the skill and experience to foresee and to adopt protective measures to adequately and safely perform the Work with respect to such hazards.
- 22. Bidder expressly acknowledges that it is familiar with and capable of complying with applicable federal, State, and local requirements relating to COVID-19 or other public health emergency/epidemic/pandemic including, if required, preparing, posting, and implementing a Social Distancing Protocol.
- 23. Bidder expressly acknowledges that it is aware that if a false claim is knowingly submitted (as the terms "claim" and "knowingly" are defined in the California False Claims Act, Gov. Code, § 12650 et seq.), the District will be entitled to civil remedies set forth in the California False Claim Act. It may also be considered fraud and the Contractor may be subject to criminal prosecution.

13.

24. The undersigned Bidder certifies that it is, at the time of bidding, and shall be throughout the period of the Contract, licensed by the State of California to do the type of work required under the terms of the Contract Documents and registered as a public works contractor with the Department of Industrial Relations. Bidder further certifies that it is regularly engaged in the general class and type of work called for in the Contract Documents.

Furthermore, Bidder hereby certifies to the District that all representations, certifications, and statements made by Bidder, as set forth in this bid form, are true and correct and are made under penalty of perjury.

Dated this	day of			20
Name of Bidder:				
Type of Organization:				
Signature:				
Print Name:				
Title:				
Address of Bidder:				
Taxpayer Identification No.	of Bidder:			
Telephone Number:				
Fax Number:				
E-mail:		Web Page:		
Contractor's License No(s):	No.:	_Class:	_ Expiration Date:	
	No.:	_ Class:	_ Expiration Date:	
	No.:	_ Class:	_ Expiration Date:	
Public Works Contractor Reg	gistration No.:			

DOCUMENT 00 43 13

BID BOND

(Note: If Bidder is providing a bid bond as its bid security, Bidder must use this form, NOT a surety company form.)

KNOW ALL PERSONS BY THESE PRESENTS:	
That the undersigned,	, as Principal ("Principal"),
andSurety ("Surety"), a corporation organized and existing us the State of California and authorized to do business as a are held and firmly bound unto the Sacramento City Unific Sacramento County, State of California, as Obligee, in an (10%) of the Base Bid plus alternates, in the sum of	surety in the State of California, ed School District ("District") of
	Dollars (\$)
lawful money of the United States of America, for the pay to be made, we, and each of us, bind ourselves, our heirs successors, and assigns, jointly and severally, firmly by t	, executors, administrators,
THE CONDITION OF THIS OBLIGATION IS SUCH that who bid to the District for all Work specifically described in the following project:	accompanying bid for the
NOW, THEREFORE, if the Principal is awarded the Contract required under the Contract Documents, after the prescrip rincipal for signature, enters into a written contract, in twith the bid, and files two bonds, one guaranteeing faithful guaranteeing payment for labor and materials as required conditions to the Contract between the Principal and the the Principal shall fully reimburse and save harmless the sustained by the Obligee through failure of the Principal thand to file the required performance and labor and materic conditions to the Contract between the Principal and the this obligation shall be null and void; otherwise, it shall be effect. The full payment of the sum stated above shall be to execute the Contract within seven (7) days of the date Principal.	bed forms are presented to he prescribed form in accordance ful performance and the other d by law, and meets all other Obligee becoming effective, or if Obligee from any damage o enter into the written contract ial bonds, and to meet all other Obligee becoming effective, then e and remain in full force and e due immediately if Principal fails

Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the Contract or the call for bids, or to the work to be performed thereunder, or the specifications accompanying the same, shall in any way affect its obligation under this bond, and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of the Contract or the call for bids, or to the work, or to the specifications.

In the event suit is brought upon this bond by the Obligee and judgment is recovered, the Surety shall pay all costs incurred by the Obligee in such suit, including a reasonable attorneys' fee to be fixed by the Court.

bidder may withdraw its bid fo	r ninety (90) days after the date of t	the bid opening.
	nstrument has been duty executed by day of	
	Principal	
	Ву	
	Surety	
	Ву	
	Name of California Ago	ent of Surety
	Address of California A	Agent of Surety

If the District awards the bid, the security of unsuccessful bidder(s) shall be returned within sixty (60) days from the time the award is made. Unless otherwise required by law, no

Bidder must attach Power of Attorney and Certificate of Authority for Surety and a Notarial Acknowledgment for all Surety's signatures. The California Department of Insurance must authorize the Surety to be an admitted Surety Insurer.

END OF DOCUMENT

Telephone Number of California Agent of Surety

DOCUMENT 00 43 36

<u>DESIGNATED SUBCONTRACTORS LIST</u> (Public Contact Code Sections 4100-4114)

PROJECT:

California contractor license number of render service to the Bidder in or about fabricate and install a portion of the Viplans and specifications in an amount	tit must clearly set forth below the name, location and of each subcontractor who will perform work or labor of the construction of the Work or who will specially Work according to detailed drawings contained in the tin excess of one-half of one percent (0.5%) of of Work that each will perform. Vendors or suppliers of d.
Bidder lists more than one subcontract perform that portion itself or be subject to the subject	r, if Bidder fails to list as to any portion of Work, or if ctor to perform the same portion of Work, Bidder must ected to penalty under applicable law. In case more the same kind of Work, state the portion of the kind of form.
or in addition to those subcontractors	d Bidder intends to use subcontractors different from slisted for work under the Base Bid, Bidder must list in an amount in excess of one half of one percent salternate(s).
If further space is required for the list of page 2 showing the required inform	t of proposed subcontractors, attach additional copies nation, as indicated below.
Subcontractor Name:	
CA Cont. Lic. #:	Location:
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
CA Cont. Lic. #:	Location:
DIR Registration #:	
-	
	Location:
סזע הפטוטוו # :	

Portion of Work:

Subcontractor Name:	
	Location:
DIR Registration #:	
	Location:
DIR Registration #:	
CA Cont. Lic. #:	Location:
DIR Registration #:	
Portion of Work:	
CA Cont. Lic. #:	Location:
DIR Registration #:	
	Location:
DIR Registration #:	
Portion of Work:	
Date: _	
Proper Name of Bidder: _	
Signature:	
Print Name:	
Title:	
_	END OF DOCUMENT

DOCUMENT 00 45 01

SITE VISIT CERTIFICATION

TO BE EXECUTED BY BIDDER AND SUBMITTED WITH BID IF SITE VISIT WAS MANDATORY

PROJECT:	
Check option that applies:	
pages of information, and construction and labor. I	ed the Site of the proposed Work, received the attached became fully acquainted with the conditions relating to fully understand the facilities, difficulties, and restrictions f the Work under contract.
acquainted with the condi-	(Bidder's representative) visited the Site reived the attached pages of information, and became fully tions relating to construction and labor. The Bidder's stood the facilities, difficulties, and restrictions attending the der contract.
Engineers, its Construction and consultants from any	ne Sacramento City Unified School District, its Architect, its n Manager, and all of their respective officers, agents, employees damage, or omissions, related to conditions that could have been and/or the Bidder's representative's visit to the Site.
I certify under penalty of is true and correct.	perjury under the laws of the State of California that the foregoin
Date:	
Proper Name of Bidder:	
Signature:	
Print Name:	
Title:	

ATTACHMENTS:

- 1.
- 2.
- 3.

DOCUMENT 00 45 19

NON-COLLUSION DECLARATION (Public Contract Code Section 7106)

The undersigned declare	es:	
I am the	of	, the party making the foregoing bid. [Name of Firm]
The bid is not made in t company, association, o sham. The bidder has not a false or sham bid. The or agreed with any bidder has not in ar communication, or confebidder, or to fix any ove other bidder. All statement indirectly, submitted his or divulged information association, organization	he interest organization of directly of bidder has er or anyon manner, erence with erhead, profents contains or her bid or data relan, bid depos	of, or on behalf of, any undisclosed person, partnership, or corporation. The bid is genuine and not collusive or or indirectly induced or solicited any other bidder to put in a not directly or indirectly colluded, conspired, connived, be else to put in a sham bid, or to refrain from bidding. directly or indirectly, sought by agreement, anyone to fix the bid price of the bidder or any other fit, or cost element of the bid price, or of that of any price or any breakdown thereof, or the contents thereof, ative thereto, to any corporation, partnership, company, sitory, or to any member or agent thereof, to effectuate a paid, and will not pay, any person or entity for such
partnership, joint ventui	re, limited l resents tha	on on behalf of a bidder that is a corporation, iability company, limited liability partnership, or any t he or she has full power to execute, and does execute, lder.
		under the laws of the State of California that the nat this declaration is executed on
-		[Date]
at [City]		ate]
Date:		
Proper Name of Bidder:		
Signature:		
Print Name:		
Title:		
		END OF DOCUMENT

DOCUMENT 00 45 19.01

IRAN CONTRACTING ACT CERTIFICATION (Public Contract Code Sections 2202-2208)

ect").
ract for goods or services of this certification pursuant to Public
e following two options. To complete the certification below. To complete certification below, and attach
rrent list of persons engaged in ifornia Department of General ode section 2203(b), and we are not allars (\$20,000,000) or more in credit other person will use the credit to in Iran and is identified on the current in Iran created by DGS.
written exemption from the ntract Code sections 2203(c) and (d). ating the exemption approval is
OF PERJURY, that I am duly OPTION selected above. This lifornia.
Federal ID Number (or n/a)
Date Executed

DOCUMENT 00 45 26

WORKERS' COMPENSATION CERTIFICATION

PROJECT/COM			between the Sacramento City
	ol District ("Distr or "Bidder") ("C	ict") and Contract" or "Project").	
Labor Code so	ection 3700, in r	relevant part, provides:	
	employer excep of the following		payment of compensation in one or
a.		ed against liability to pay cor uthorized to write compensa	mpensation by one or more ation insurance in this state; and/or
b.	self-insure, wh Director of Indi		, , ,
employer to be insurance in a	pe insured again accordance with	of section 3700 of the Labor st liability for workers' comp the provisions of that code, g the performance of the Wo	pensation or to undertake self- and I will comply with such
Date:			
Proper Name	of Contractor:		
Signature:			
Print Name:			
Title:			
•			the above certificate must being any Work under this Contract.)

PREVAILING WAGE AND RELATED LABOR REQUIREMENTS CERTIFICATION

PROJECT/CONTRACT NO.: _		between the Sacramento City
Unified School District ("Distri		
("Contractor" or "Bidd	ler") ("Contract" or "Project").
payroll records, and apprentic	ailing wages, benefits, on-sit ce and trainee employment r out limitation, labor compliar	nia Public Works Contract e audits with 48-hours' notice, requirements, for all Work on the nce monitoring and enforcement by
minimum wages, withholding, employment requirements, ed	, payrolls and basic records, qual employment opportunit nd Related Act requirements and any and all other applica	requirements, Copeland Act , Contract Work Hours and Safety
Date:		
Proper Name of Contractor:		
Signature:		
Print Name:		
Title:		

DISABLED VETERAN BUSINESS ENTERPRISE PARTICIPATION CERTIFICATION

PROJECT/CONTRACT NO.:	between the Sacramento City
Unified School District ("District") and	,
("Contractor" or "Bidder") ("Contract" or "Project").	

GENERAL INSTRUCTIONS

Section 17076.11 of the Education Code requires school districts using, or planning to use, funds allocated pursuant to the State of California School Facility Program ("Program") for the construction and/or modernization of school buildings to have a participation goal for disabled veteran business enterprises ("DVBE") of at least three percent (3%) per year of the overall dollar amount expended each year by the school district on projects that receive state funding. Therefore, the lowest responsive responsible Bidder awarded the Contract must submit this document to the District with its executed Agreement, identifying the steps contractor took to solicit DVBE participation in conjunction with this Contract. **Do not submit this form with your bids.**

PART I – Method of Compliance with DVBE Participation Goals. Check the appropriate box to indicate your method of committing the contract dollar amount.

YOUR BUSINESS ENTERPRISE	AND YOU WILL	AND YOU WILL
IS:		
1.01 ☐ Disabled veteran owned	Include a copy of your	Complete Part 1 of this
and your forces will	DVBE letter from Office	form and the
perform at least 3% of this	of Small Business and	Certification
Contract	Disabled Veterans	
	Business Enterprise	
	Services ("OSDS")*	
1.02 ☐ Disabled veteran owned	Use DVBE	Include a copy of each
but is unable to perform	subcontractors	DVBE's letter from OSDS
3% of this Contract with	/suppliers to bring the	(including yours, if
your forces	Contract participation to	applicable), and
,	at least 3%	complete Part 1 of this
1.03 ☐ NOT disabled veteran	Use DVBE	form and the
owned	subcontractors	Certification
	/suppliers for at least	
	3% of this Contract	
1.04□ Unable to meet the	Make good faith efforts,	Complete all of this form
required participation goals	including contacts,	and the Certification
after good faith efforts	advertisement and DVBE	
	solicitation	

^{*} A DVBE letter from OSDS is obtained from the participating DVBE.

You must complete the following table to show the dollar amount of DVBE participation:

		TOTAL CONTRACT PRICE
1.01	Prime Bidder, if DVBE (own participation)	\$
1.02	DVBE Subcontractor or Supplier	
	A.	
	В.	
	C.	
	D.	
1.03	Subtotal (A & B)	
1.04	Non-DVBE	
1.05	Total Bid	

PART II – Contacts. To identify DVBE subcontractors/suppliers for participation in your contract, you must contact each of the following categories. You should contact several DVBE organizations.

CATEGORY	TELEPHONE NUMBER	DATE CONTACTED	PERSON CONTACTED	
A. The District, if any			*	
B. OSDS, provides assistance locating DVBEs at https://caleprocure.ca.gov/pages/PublicS earch/supplier-search.aspx	(916) 375- 4940		*	
C. DVBE Organization (List)			*	

^{*}Write "recorded message" in this column, if applicable.

PART III – Advertisement. You must advertise for DVBE participation in both a trade and focus paper. List the advertisement you place to solicit DVBE participation. Advertisements should be published at least fourteen (14) days prior to bid/proposal opening; if you cannot advertise fourteen (14) days prior, advertisements should be published as soon as possible. Advertisements must include that your firm is seeking DVBE participation, the project name and location, and your firm's name, your contact person, and telephone number. Attach copies of advertisements to this form.

FOCUS/TRADE PAPER NAME	CHECK ONE		DATE OF ADVERTISEMENT
	TRADE	FOCUS	

PART IV – DVBE Solicitations. List DVBE subcontractors/suppliers that were invited to bid. Use the following instructions to complete the remainder of this section (read the three columns as a sentence from left to right). If you need additional space to list DVBE solicitations, please use a separate page and attach to this form.

IF THE DVBE	THEN			AND	
was selected to participate	Check "YES" in the		include a copy of their DVBE		
	"SELECTED" co	olumn		letter(s) from	OSDS
was NOT selected to	Check "NO" in	the		state why in the "REASON	
participate	"SELECTED" co	olumn		NOT SELECTED" column	
did not respond to your	Check the "NO RESPONSE"				
solicitation	column.				
DVBE CONTACTED		SELEC	CTED	REASON NOT SELECTED	NO RESPONSE
		YES	NO		

A copy of this form must be retained by you and may be subject to a future audit.

CERTIFICATION

I,, certify that I am the bidder's and that I have made a diligent effort to ascertain the facts with regard to the representations made herein. In making this certification, I am aware of section 12 seq. of the Government Code providing for the imposition of treble damages for ma false claims.			
Date:			
Proper Name of Contractor:			
Signature:			
Print Name:			
Title:			

DRUG-FREE WORKPLACE CERTIFICATION

PROJECT/CONTRACT NO.:	between the Sacramento City
Unified School District ("District") and	•
("Contractor" or "Bidder") ("Contract" or "Project")	ct").

This Drug-Free Workplace Certification form is required from the successful Bidder pursuant to Government Code section 8350 et seq., the Drug-Free Workplace Act of 1990. The Drug-Free Workplace Act of 1990 requires that every person or organization awarded a contract or grant for the procurement of any property or service from any state agency must certify that it will provide a drug-free workplace by doing certain specified acts. In addition, the Act provides that each contract or grant awarded by a state agency may be subject to suspension of payments or termination of the contract or grant, and the contractor or grantee may be subject to debarment from future contracting, if the contracting agency determines that specified acts have occurred.

The District is not a "state agency" as defined in the applicable section(s) of the Government Code, but the District is a local agency and public school district under California law and requires all contractors on District projects to comply with the provisions and requirements of the Drug-Free Workplace Act of 1990.

Contractor must also comply with the provisions of Health & Safety Code section 11362.3 which prohibits the consumption or possession of cannabis or cannabis products in any public place, including school grounds, and specifically on school grounds while children are present.

Contractor shall certify that it will provide a drug-free workplace by doing all of the following:

- a. Publishing a statement notifying employees that the unlawful manufacture, distribution, dispensation, possession, or use of a controlled substance is prohibited in the person's or organization's workplace and specifying actions which will be taken against employees for violations of the prohibition.
- b. Establishing a drug-free awareness program to inform employees about all of the following:
 - (1) The dangers of drug abuse in the workplace.
 - (2) The person's or organization's policy of maintaining a drug-free workplace.
 - (3) The availability of drug counseling, rehabilitation, and employee-assistance programs.
 - (4) The penalties that may be imposed upon employees for drug abuse violations.
- c. Requiring that each employee engaged in the performance of the contract or grant be given a copy of the statement required above, and that, as a

condition of employment on the contract or grant, the employee agrees to abide by the terms of the statement.

I, the undersigned, agree to fulfill the terms and requirements of Government Code section 8355 listed above and will publish a statement notifying employees concerning (a) the prohibition of controlled substance at the workplace, (b) establishing a drug-free awareness program, and (c) requiring that each employee engaged in the performance of the Contract be given a copy of the statement required by section 8355(a), and requiring that the employee agree to abide by the terms of that statement.

I also understand that if the District determines that I have either (a) made a false certification herein, or (b) violated this certification by failing to carry out the requirements of section 8355, that the Contract awarded herein is subject to termination, suspension of payments, or both. I further understand that, should I violate the terms of the Drug-Free Workplace Act of 1990, I may be subject to debarment in accordance with the requirements of the aforementioned Act.

I acknowledge that I am aware of the provisions of and hereby certify that I will adhere to the requirements of the Drug-Free Workplace Act of 1990 and Health and Safety Code section 11362.3.

Date:	
Proper Name of Contractor:	
Signature:	
Print Name:	
Title:	
	END OF DOCUMENT

TOBACCO-FREE ENVIRONMENT CERTIFICATION

Unified School District ("Distri	ict") and
	ler") ("Contract" or "Project").
This Tobacco-Free Environme	nt Certification form is required from the successful Bidder.
Health & Safety Code section et seq., and District Board po free environments. Smoking or in District property. District owned vehicles and vehicles of a smoking includes the use of a in any manner or in any form circumventing the prohibition	n, 20 U.S.C. section 6083, Labor Code section 6400 et seq., 104350 et seq., Business and Professions Code section 22950 licies, all District sites, including the Project site, are tobaccoand the use of tobacco products by all persons is prohibited or troperty includes school buildings, school grounds, school-buned by others while on District property. The prohibition on any electronic smoking device that creates an aerosol or vapor, and the use of any oral smoking device for the purpose of of tobacco smoking. Further, Health & Safety Code section g or use of cannabis or cannabis products in any place where l.
at District sites, including the requirements of that policy ar	re of the District's policy regarding tobacco-free environments Project site and hereby certify that I will adhere to the nd not permit any of my firm's employees, agents, subcontractors' employees or agents, to use tobacco and/or
Date:	
Proper Name of Contractor:	
Signature:	
Print Name:	
Title:	
	END OF DOCUMENT

PROJECT/CONTRACT NO.:

between the Sacramento City

HAZARDOUS MATERIALS CERTIFICATION

	CT/CONTRACT NO.: District ("District") and	d	_ between Sacramento City Unified
("Cont	ractor" or "Bidder") ("C	contract" or "Project").	
25.	polychlorinated bipher Environmental Protect material, or any other laws, rules, or regulati or incorporated in any	yl (PCB), or any material listion Agency or federal or sta material defined as being hons, ("New Hazardous Mate way into the Project or in a	sbestos-containing materials, sted by the federal or state ate health agencies as a hazardous nazardous under federal or state erial"), shall be furnished, installed, any tools, devices, clothing, or or's work on the Project for District.
26.		ifies that it has instructed id dards, hazards, risks, and l	ts employees with respect to the iabilities.
27.	but not limited to chry actinolite. Any or all r	sotile, crocidolite, amosite,	all be defined as all items containing anthophyllite, tremolite, and than one-tenth of one percent taining material.
28.	Material shall be settle testing procedure, at t	d by electron microscopy o	not material is New Hazardous r other appropriate and recognized The costs of any such tests shall be New Hazardous Material.
29.	installed with equipme	nt containing New Hazardo	Material or Work or material us Material will be immediately ctor's expense at no additional cost
30.	Procedures & Requirer Contractor certifies the applicable to the Work	nents, and shall comply wit at it is knowledgeable of, ar including, but not limited t	nt titled Hazardous Materials h all the provisions outlined therein. nd shall comply with, all laws to, all federal, state, and local laws, ances applicable to the Work.
Date:			
Proper	Name of Contractor:		
Signat	ure:		
Print N	lame:		
Title:			
		END OF DOCUMENT	

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

LEAD-BASED MATERIALS CERTIFICATION

PROJECT/CONTRACT NO.:	between the Sacramento City
Unified School District ("District") and	·
("Contractor" or "Bidder") ("Contract" or "Project")	ct").

This certification provides notice to the Contractor that:

- (1) Contractor's work may disturb lead-containing building materials.
- (2) Contractor shall notify the District if any work may result in the disturbance of lead-containing building materials.
- (3) Contractor shall comply with the Renovation, Repair and Painting Rule, if lead-based paint is disturbed in a six-square-foot or greater area indoors or a 20-square-foot or greater area outdoors.

1. Lead as a Health Hazard

Lead poisoning is recognized as a serious environmental health hazard facing children today. Even at low levels of exposure, much lower than previously believed, lead can impair the development of a child's central nervous system, causing learning disabilities, and leading to serious behavioral problems. Lead enters the environment as tiny lead particles and lead dust disburses when paint chips, chalks, peels, wears away over time, or is otherwise disturbed. Ingestion of lead dust is the most common pathway of childhood poisoning; lead dust gets on a child's hands and toys and then into a child's mouth through common hand-to-mouth activity. Exposures may result from construction or remodeling activities that disturb lead paint, from ordinary wear and tear of windows and doors, or from friction on other surfaces.

Ordinary construction and renovation or repainting activities carried out without lead-safe work practices can disturb lead-based paint and create significant hazards. Improper removal practices, such as dry scraping, sanding, or water blasting painted surfaces, are likely to generate high volumes of lead dust.

Because the Contractor and its employees will be providing services for the District, and because the Contractor's work may disturb lead-containing building materials, CONTRACTOR IS HEREBY NOTIFIED of the potential presence of lead-containing materials located within certain buildings utilized by the District. All school buildings built prior to 1978 are presumed to contain some lead-based paint until sampling proves otherwise.

2. Overview of California Law

Education Code section 32240 et seq. is known as the Lead-Safe Schools Protection Act. Under this act, the Department of Health Services is to conduct a sample survey of schools in the State of California for the purpose of developing risk factors to predict lead contamination in public schools. (Ed. Code, § 32241.)

Any school that undertakes any action to abate existing risk factors for lead is required to utilize trained and state-certified contractors, inspectors, and workers. (Ed. Code, § 32243, subd. (b).) Moreover, lead-based paint, lead plumbing, and solders, or other potential sources of lead contamination, shall not be utilized in the construction of any new school facility or the modernization or renovation of any existing school facility. (Ed. Code, § 32244.)

Both the Federal Occupational Safety and Health Administration ("Fed/OSHA") and the California Division of Occupational Safety and Health ("Cal/OSHA") have implemented safety orders applicable to all construction work where a contractor's employee may be occupationally exposed to lead.

The OSHA Regulations apply to all construction work where a contractor's employee may be occupationally exposed to lead. The OSHA Regulations contain specific and detailed requirements imposed on contractors subject to those regulations. The OSHA Regulations define construction work as work for construction, alteration, and/or repair, including painting and decorating. Regulated work includes, but is not limited to, the following:

- a. Demolition or salvage of structures where lead or materials containing lead are present;
- b. Removal or encapsulation of materials containing lead;
- c. New construction, alteration, repair, or renovation of structures, substrates, or portions thereof, that contain lead, or materials containing lead;
- d. Installation of products containing lead;
- e. Lead contamination/emergency cleanup;
- f. Transportation, disposal, storage, or containment of lead or materials containing lead on the site or location at which construction activities are performed; and
- g. Maintenance operations associated with the construction activities described in the subsection.

Because it is assumed by the District that all painted surfaces (interior as well as exterior) within the District contain some level of lead, it is imperative that the Contractor, its workers and subcontractors fully and adequately comply with all applicable laws, rules and regulations governing lead-based materials (including title 8, California Code of Regulations, section 1532.1).

Contractor shall notify the District if any Work may result in the disturbance of lead-containing building materials. Any and all Work that may result in the disturbance of lead-containing building materials shall be coordinated through the District. A signed copy of this Certification shall be on file prior to beginning Work on the Project, along with all current insurance certificates.

3. Renovation, Repair and Painting Rule, Section 402(c)(3) of the Toxic Substances Control Act

The EPA requires lead safe work practices to reduce exposure to lead hazards created by renovation, repair and painting activities that disturb lead-based paint. Pursuant to the Renovation, Repair and Painting Rule (RRP), renovations in homes, childcare facilities, and schools built prior to 1978 must be conducted by certified renovations firms, using renovators with training by a EPA-accredited training provider, and fully and adequately complying with all applicable laws, rules and regulations governing lead-based materials, including those rules and regulations appearing within title 40 of the Code of Federal Regulations as part 745 (40 CFR 745).

The RRP requirements apply to all contractors who disturb lead-based paint in a six-square-foot or greater area indoors or a 20-square-foot or greater area outdoors. If a DPH-certified inspector or risk assessor determines that a home constructed before 1978 is lead-free, the federal certification is not required for anyone working on that particular building.

4. Contractor's Liability

If the Contractor fails to comply with any applicable laws, rules, or regulations, and that failure results in a site or worker contamination, the Contractor will be held solely responsible for all costs involved in any required corrective actions, and shall defend, indemnify, and hold harmless the District, pursuant to the indemnification provisions of the Contract, for all damages and other claims arising therefrom.

If lead disturbance is anticipated in the Work, only persons with appropriate accreditation, registrations, licenses, and training shall conduct this Work.

It shall be the responsibility of the Contractor to properly dispose of any and all waste products, including, but not limited to, paint chips, any collected residue, or any other visual material that may occur from the prepping of any painted surface. It will be the responsibility of the Contractor to provide the proper disposal of any hazardous waste by a certified hazardous waste hauler. This company shall be registered with the Department of Transportation (DOT) and shall be able to issue a current manifest number upon transporting any hazardous material from any school site within the District.

The Contractor shall provide the District with any sample results prior to beginning Work, during the Work, and after the completion of the Work. The District may request to examine, prior to the commencement of the Work, the lead training records of each employee of the Contractor.

THE CONTRACTOR HEREBY ACKNOWLEDGES, UNDER PENALTY OF PERJURY, THAT IT:

- **1.** HAS RECEIVED NOTIFICATION OF POTENTIAL LEAD-BASED MATERIALS ON THE OWNER'S PROPERTY;
- 2. IS KNOWLEDGEABLE REGARDING AND WILL COMPLY WITH ALL APPLICABLE LAWS, RULES, AND REGULATIONS GOVERNING WORK WITH, AND DISPOSAL, OF LEAD.

OF AND BIND THE CONTRAC AUTHORITY.	TOR. THE DISTRICT MAY REQUIRE PROOF OF SUCH
Date:	
Proper Name of Contractor:	
Signature:	
Print Name:	
Title:	

THE UNDERSIGNED WARRANTS THAT HE/SHE HAS THE AUTHORITY TO SIGN ON BEHALF

DOCUMENT 00 45 46.07 IMPORTED MATERIALS CERTIFICATION

PROJECT/CONTRACT NO.: Unified School District ("District") and ("Contractor" or "Bidder") ("Contract" or "Project"			between the Sacramento City	
Unified School E	District ("District") and actor" or "Bidder") ("Contract" o	or "Project").		
This form shall I any soils, aggre the District at le any environmen of the California Code ("CEQA"), including require	pe executed by all entities that, gate, or related materials ("Fill'east ten (10) days before delivental review of the Project performental Quality Act, section and all requirements of section ements for a Phase I environment of Education and Depart	in any way, provi ') to the Project S ry. All Fill shall sa med pursuant to t tion 21000 et seq 17210 et seq. of ental assessment	ite and shall be provided to atisfy all requirements of the statutes and guidelines of the Public Resources the Education Code, acceptable to the State of	
Certification of:	Delivery Firm/TransporterWholesalerDistributor	⊓ Broker	□ Manufacturer□ Retailer	
Type of Entity	□ Corporation□ Limited Partnership□ Sole Proprietorship	□ General Partn□ Limited Liabili□ Other		
Name of firm ("	Firm"):			
Mailing address	:			
Addresses of bra	anch office used for this Project	:	_	
If subsidiary, na	me and address of parent com	pany:		
Safety Code and material. I furth materials provide supplied by this defined in section	e below, I hereby certify that I and the sections referenced thereiner certify on behalf of the Firm led, delivered, and/or supplied Firm to the Project Site are freon 25260 of the Health and Safeake this certification on behalf of	n regarding the do that all soils, agg or that will be pro e of any and all ha ety Code. I furthe	efinition of hazardous pregates, or related vided, delivered, and/or azardous material as	
Date:				
Proper Name of	Firm:			
Signature:				
Print Name:				
Title:	END OF DO	DCUMENT		

CRIMINAL BACKGROUND INVESTIGATION /FINGERPRINTING CERTIFICATION

Sc	hool District ("District") and
("(Contractor" or "Bidder") ("Contract" or "Project").
Co ce	e undersigned does hereby certify to the District that I am a representative of the ontractor currently under contract with the District; that I am familiar with the facts herein rtified; and that I am authorized and qualified to execute this certificate on behalf of ontractor.
	ontractor certifies that it has taken at least one of the following actions (check all that ply):
	Pursuant to Education Code section 45125.2(a), Contractor has installed or will install, prior to commencement of Work, a physical barrier at the Work Site, that will limit contact between Contractor's employees, Subcontractors or suppliers and District pupils at all times; and/or
	Pursuant to Education Code section 45125.2(a), Contractor certifies that all employees will be under the continual supervision of, and monitored by, an employee of the Contractor who the California Department of Justice ("DOJ") has ascertained, or as described below, will ascertain, has not been convicted of a violent or serious felony. The name and title of the employee who will be supervising Contractor's and its subcontractors' or suppliers' employees is:
	Name:
	Title:
	NOTE : If Contractor is a sole proprietor, and elects the above option, Contractor must have the above-named employee's fingerprints prepared and submitted by District for submission to the DOJ, in accordance with Education Code section 45125.1(h). No work shall commence until such determination by DOJ has been made.
	Pursuant to Education Code section 45125.2(a), the District will take appropriate steps to protect the safety of any pupils that may come in contact with Contractor's employees, subcontractors or suppliers so that the fingerprinting and criminal background investigation requirements of Education Code section 45125.2 shall not apply to Contractor under the Contract.
	The Work on the Contract is either (i) at an unoccupied school site and no employee of Contractor and/or subcontractor or supplier of any tier of the Contract shall come in contact with the District pupils or (ii) if Contractor's employees or any subcontractor or supplier of any tier of the Contract interacts with pupils, such interaction shall only take place under the immediate supervision and control of the pupil's parent or guardian or a school employee, so that the fingerprinting and criminal background investigation requirements of Education Code section 45125.1 shall not apply to Contractor under the Contract.

□ The Contractor, who is not a sole proprietor, has complied with the fingerprinting requirements of Education Code section 45125.1 with respect to all Contractor's employees and all of its Subcontractors' employees who may have contact with District pupils in the course of providing services pursuant to the Contract, and the DOJ has determined (A) that none of those employees has been convicted of a felony, as that term is defined in Education Code section 45122.1 and/or (B) that the prohibition does not apply to an employee as provided by Education Code section 45125.1(e)(2) or (3). When the Contractor performs the criminal background check, it shall immediately provide any subsequent arrest and conviction information it receives to the District pursuant to the subsequent arrest service. No work shall commence until the Department of Justice ascertains that Contractor's employees and any subcontractors' employees have not been convicted of a felony as defined in Government Code Section 45122.1.

A complete and accurate list of Contractor's employees and of all of its subcontractors' employees who may come in contact with District pupils during the course and scope of the Contract is attached hereto as ATTACHMENT "A;" and/or

□ The Contractor is a sole proprietor and intends to comply with the fingerprinting requirements of Education Code section 45125.1(h) with respect to all Contractor's employees who may have contact with District pupils in the course of providing services pursuant to the Contract, and hereby agrees to the District's preparation and submission of fingerprints such that the DOJ may determine (A) that none of those employees has been convicted of a felony, as that term is defined in Education Code section 45122.1 and/or (B) that the prohibition does not apply to an employee as provided by Education Code section 45125.1(e)(2) or (3). No work shall commence until the Department of Justice ascertains that Contractor's employees and any subcontractors' employees have not been convicted of a felony as defined in Government Code Section 45122.1.

Contractor's responsibility for background clearance extends to all of its employees, Subcontractors or suppliers, and employees of Subcontractors or suppliers coming into contact with District pupils regardless of whether they are designated as employees or acting as independent contractors of the Contractor.

[CONTINUED ON NEXT PAGE]

ATTACHMENT "A"

List of Employees/Subcontractors

Name/Company:
Name/Company:
If further space is required for the list of employees/subcontractors, attach additional copies of this page.
Date:
Proper Name of Contractor:
Signature:
Print Name:
Title:

BUY AMERICAN CERTIFICATION

Unified School District ("District		between the Sacramento City
	der") ("Contract" or "Pro	eject").
projects for the construction, maintenance of a public build stimulus funds, with the exce Bonds, be produced in the Urthis requirement because (1) produced in sufficient quantit	installation, repairs, rer ling or public work funded eption of projects funded nited States of America, it is inconsistent with the cies or of satisfactory qua	and manufactured goods used in novation, modernization, or ed in part or in whole by federal by Qualified School Construction unless a federal department waives ne public interest, (2) the goods are not ality in the United States, or (3) the verall by more than twenty-five percent
	oods produced in the Uni	cuted agreement, identifying the steps ited States of America in carrying out th its bid.
Contractor shall retain a copy	of this form and may b	e subject to a future audit.
	CERTIFICATIO	ON
	cured goods produced in	at Contractor will use on the Project the United States of America except s requirement.
Ι,		nat I am the Contractor's
true and correct. In making	this certification, I am a	tions and covenants made herein are ware of section 12650 et seq. of the ble damages for making false claims.
Date:		
Proper Name of Contractor:		
Signature:		
Print Name:		
Title:		-

FEDERAL DEBARMENT CERTIFICATION

PROJECT/CONTRACT NO.:between the Sacramento City Unified School District ("District") and ("Contractor" or "Bidder") ("Contract" or "Project").
1. Bidder certifies to the best of its knowledge and belief, that it and its principals:
a. Are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded by any Federal department or Board;
b. Have not within a three-year period preceding this bid been convicted of or had a civil judgment rendered against them for commission of fraud or a criminal offense in connection with obtaining, attempting to obtain, or performing a public (Federal, State or local) transaction or contract under a public transaction; violation of Federal or State antitrust statutes or commission of embezzlement, theft, forgery, bribery, falsification or destruction of records, making false statements, or receiving stolen property;
c. Are not presently indicted for or otherwise criminally or civilly charged by a governmental entity (Federal, State or local) with commission of any of the offenses enumerated in paragraph $(1)(b)$ of this certification; and
d. Have not within a three-year period preceding this application/proposal had one or more public transactions (Federal, State or local) terminated for cause or default.
2. Where Bidder is unable to certify to any of the statements in this certification, Bidder shall attach an explanation to this certification.
3. Bidder agrees to include the following certification in all subcontracts, for all lower tiers:
"Debarment and Suspension Certification – By submission of its proposal, the contractor (or vendor, or consultant, depending on the transaction) certifies to the best of its knowledge and belief that it and its principals are not presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from covered transactions by any Federal department or agency in accordance with 2 CFR 200.213 and 2 CFR 180."
Date:
Proper Name of Contractor:
Signature:
Print Name:
Title:

BYRD ANTI-LOBBYING CERTIFICATION

Applicable to Grants, Subgrants, Cooperative Agreements, and Contracts Exceeding \$100,000 in Federal Funds

Submission of this certification is a prerequisite for making or entering into this transaction and is imposed by section 1352, Title 31, U.S. Code. This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

The undersigned certifies, to the best of their knowledge and belief, that:

- (1) No Federal appropriated funds have been paid or will be paid, by or on behalf of the undersigned, to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment or modification of any Federal contract, grant, loan, or cooperative agreement.
- (2) If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure of Lobbying Activities," in accordance with its instructions.
- (3) The undersigned shall require that the language of this certification be included in the award documents of all sub-awards at all tiers (including subcontracts, sub-grants, and contracts under grants, loans, and cooperative agreements) and that all sub- recipients shall certify and disclose accordingly.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by section 1352, title 31, United States Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than \$10,000 and not more than \$100,000 for each such failure.

Contractor		
Address		
Certified by: (type or print)		
Title		
Signature		
Date		

Complete this form to disclose lobbying activities pursuant to 31 U.S.C. 1352

(See following page for public burden disclosure)

2. Status of Federal Action:

3. Report Type:

□ contract □ grant □ cooperative agreement loan □ loan guarantee □ loan insurance	□ proposal/offe □ initial award □ post-award		□ initial filing □ material change For material change only: Yearquarter Date of last report
4. Name and Address of Reporting EPrimeSubawardee Tier,	•		g Entity in No. 4 is Subawardee, and Address of Prime:
Congressional District, if known:		Congressional	District, if known:
6. Federal Department/Agency:			ogram Name/Description: r, if applicable:
8. Federal Action Number, if know	n:	9. Award Am	ount, <i>if known:</i>
10a. Name and Address of Lobbyin (if individual, last name, first name,			ials Performing Services (including ferent from No. 10a) st name, MI):
11. Information requested through authorized by title 31 U.S.C. section disclosure of lobbying activities is representation of fact upon which placed by the tier above when this was made or entered into. This dis required pursuant to 31 U.S.C. 135 information will be reported to the semi-annually and will be available inspection. Any person who fails to required disclosure shall be subject penalty of not less than \$10,000 a than \$100,000 for each such failure.	n 1352. This a material reliance was transaction closure is 2. This Congress e for public of file the ct to a civil and not more	Print Name: _	Date:
Federal Use Only			or Local Reproduction m - LLL (Rev. 7-97)

INSTRUCTIONS FOR COMPLETION OF SF-LLL, DISCLOSURE OF LOBBYING ACTIVITIES

This disclosure form shall be completed by the reporting entity, whether subawardee or prime Federal recipient, at the initiation or receipt of a covered Federal action, or a material change to a previous filing, pursuant to Title 31, U.S.C. section 1352. The filing of a form is required for each payment or agreement to make payment to any lobbying entity for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with a covered Federal action. Complete all items that apply for both the initial filing and material change report. Refer to the implementing guidance published by the Office of Management and Budget for additional information.

- 1. Identify the type of covered Federal action for which lobbying activity is and/or has been secured to influence the outcome of a covered Federal action.
- 2. Identify the status of the covered Federal action.
- 3. Identify the appropriate classification of this report. If this is a follow up report caused by a material change to the information previously reported, enter the year and quarter in which the change occurred. Enter the date of the last previously submitted report by this reporting entity for this covered Federal action.
- 4. Enter the full name, address, city, State and zip code of the reporting entity. Include Congressional District, if known. Check the appropriate classification of the reporting entity that designates if it is, or expects to be, a prime or subaward recipient. Identify the tier of the subawardee, e.g., the first subawardee of the prime is the 1st tier. Subawards include but are not limited to subcontracts, subgrants and contract awards under grants.
- 5. If the organization filing the report in item 4 checks "Subawardee," then enter the full name, address, city, State and zip code of the prime Federal recipient. Include Congressional District, if known.
- 6. Enter the name of the federal agency making the award or loan commitment. Include at least one organizational level below agency name, if known. For example, Department of Transportation, United States Coast Guard.
- 7. Enter the Federal program name or description for the covered Federal action (item 1). If known, enter the full Catalog of Federal Domestic Assistance (CFDA) number for grants, cooperative agreements, loans, and loan commitments.
- 8. Enter the most appropriate Federal identifying number available for the Federal action identified in item 1 (e.g., Request for Proposal (RFP) number; Invitations for Bid (IFB) number; grant announcement number; the contract, grant, or loan award number; the application/proposal control number assigned by the Federal agency). Included prefixes, e.g., "RFP-DE-90-001."
- 9. For a covered Federal action where there has been an award or loan commitment by the Federal agency, enter the Federal amount of the award/loan commitment for the prime entity identified in item 4 or 5.
- 10. (a) Enter the full name, address, city, State and zip code of the lobbying registrant under the Lobbying Disclosure Act of 1995 engaged by the reporting entity identified in item 4 to influence the covered Federal action.
- (b) Enter the full names of the individual(s) performing services, and include full address if different from 10(a). Enter Last Name, First Name, and Middle Initial (MI).
- 11. The certifying official shall sign and date the form, print his/her name, title, and telephone number.

According to the Paperwork Reduction Act, as amended, no persons are required to respond to a collection of information unless it displays a valid OMB control Number. The valid OMB control number for this information collection is OMB No. 0348-0046. Public reporting burden for this collection of information is estimated to average 10 minutes per response, including time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding the burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to the Office of Management and Budget, Paperwork Reduction Project (0348-0046), Washington, DC 20503.

DOCUMENT 00 45 49

REGISTERED SUBCONTRACTORS LIST (Labor Code Section 1771.1)

PROJECT:	
Date Submitted (for Updates):	
ontractor acknowledges and agrees that it must clearly set forth below the name a epartment of Industrial Relations (DIR) registration number of each subcontractor ers who will perform work or labor or render service to Contractor or its subcontrate about the construction of the Work at least two (2) weeks before the subcontractor service to perform work. This document is to be updated as all tiers of abcontractors are identified.	for all actors in
ontractor acknowledges and agrees that, if Contractor fails to list as to any subcon any tier who performs any portion of Work, the Contract is subject to cancellation ontractor will be subjected to penalty under applicable law.	
further space is required for the list of proposed subcontractors, attach additional page 2 showing the required information, as indicated below.	copies
ubcontractor Name:	
DIR Registration #:	
Portion of Work:	
ubcontractor Name:	
DIR Registration #:	
Portion of Work:	
ubcontractor Name:	
DIR Registration #:	
Portion of Work:	
ubcontractor Name:	
DIR Registration #:	
Portion of Work:	
ubcontractor Name:	
DIR Registration #:	
Portion of Work:	

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Subcontractor Name:	
DIR Registration #:	
Portion of Work:	
Date:	
Name of Contractor:	
Signature:	
Print Name:	
Title:	

DOCUMENT 00 45 90

POST BID INTERVIEW

PART 5 - GENERAL

5.01 SUMMARY

If requested by the District, this Section requires the apparent low bidder to attend and participate in a Post Bid Interview with the Construction Manager, prior to award of any contract by the District. The Post Bid Interview will be scheduled by the Construction Manager within three (3) calendar days after the date of bid.

5.02 REQUIRED ATTENDANCE

- A. A duly authorized representative of the apparent low bidder is required to attend the Post Bid Interview, in person.
- B. The apparent low bidder's authorized representative(s) must have (1) knowledge of how the bid submitted was prepared, (2) the person responsible for supervising performance of the Work, and (3) the authority to bind the apparent low bidder.
- C. Failure to attend the Post Bid Interview as scheduled will be considered just cause for the District to reject the Bid as nonresponsive.

5.03 POST BID INTERVIEW PROCEDURE

- A. The Construction Manager will review the Bid with the attendees.
- B. The Construction Manager will review the Contract Documents with the attendees, including but not limited to:
 - (1) Insurance
 - (2) Bonding
 - (3) Addenda
 - (4) Pre-Bid Clarifications
 - (5) Scope of Work
 - (6) Bid Packages Descriptions
 - (7) Bid Alternates
 - (8) Contract Plans
 - (9) Contract Specifications
 - (10) Project Schedule and Schedule Requirements

- (11) Critical Dates Requirement for Other Bid Packages
- (12) Prevailing Wage Requirements
- (13) Liquidated Damages
- (14) Required Documentation for Contract Administration
- (15) Contract Coordination Requirements

5.04 POST BID INTERVIEW DOCUMENTATION

The Construction Manager will document the Post Bid Interview on the form attached to this Section. Both the apparent low bidder and the Construction Manager are required to sign the Post Bid Interview Documentation.

[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK]

POST BID INTERVIEW

CONSTRUCTION MANAGER

[Name] [Address 1] [Address 2] [Phone]		-	[Fax]			
BIDDE	R:					
DATE:			TIME:	PHONE:		
V.		RODUCTIONS: Present				
	A.		CONTRACTOR	CONTR	RACTOR	
			[CM]	[C	[M]	
VI.	PRO	POSED CONTRA	CT:			
VII.		RPOSE OF INTER\ LOWING:	/IEW IS TO ASSURE A MUTUA	AL UNDERSTANDING C)F THE	
	Α.	Do you acknowle	edge submission of a complet	te and accurate bid?	Yes	No
	В.		edge the Bid Document subm nd can you meet those timelir		Yes	No
	C.	Do you acknowled documents?	edge the requirements for the	e escrow of bid	Yes	No
VIII.	D. CO	Are you comfort NTRACTUAL REQU	able with your listed subcont JIREMENTS:	ractors?	Yes	No
	Α.	Do you understa	and you are a prime contracto	or?	Yes	No
	В.	Can you meet sp	pecified insurance requiremen	nts?	Yes	No
			our policies that require Addi nts exceed the minimum cove		Yes	No
			uesting that the District acce olicy to meet the policy limit?		Yes	No

		3.	underlying policy and the start of the coverage under the Umbrella or Excess Liability Insurance Policy?	Yes	No
	C.		I you provide the Performance Bond and Labor and Material nd for 100% of the Contract Price as stipulated?	Yes	No
		1.	Cost for bonds:%	Yes	No
		2.	Is the cost of your bonds in your base bid?	Yes	No
		3.	Is your surety licensed to issue bonds in California?	Yes	No
	D.	Do	you understand the fingerprinting requirements?	Yes	No
	E.	Is i	t understood that all workers must be paid prevailing wage?	Yes	No
	F.	reg	t understood that all subcontractors of every tier must be istered as a public works contractor with the Department of ustrial Relations?	Yes	No
IX.	SCO	OPE (OF WORK:		
	A.	Ack	knowledged Receipt of Addenda #1	Yes	No
	В.		the costs for addenda items included in your bid? (if blicable)	Yes	No
	C.		you have a complete understanding of your Scope of Work der the proposed Agreement?	Yes	No
	D.	the	whave re-reviewed the documents and understand the Scope of Work. Are there any items that require clarification? The rest please identify them.	Yes	No
		1.			
		2.			
		3.			
		Is ((are) there additional cost(s) for the above item(s)?	Yes	No
	E.	Is t	the cost for allowance included in your bid?	Yes	No
	F.	Hav	ve you reviewed bid alternative(s) #1? (if applicable)	Yes	No

	G.	Are	the costs for bid alternatives included in your bid?	Yes	No
	Н.		the plans and specifications clear and understandable to your sfaction?	Yes	No
	I.		you acknowledge that the time to submit notice of requests for stitution of specified materials has expired?	Yes	No
Χ.	SCI	HEDL	JLE:		
	Α.		you acknowledge and agree to the stipulated completion dates milestones in the contract?	Yes	No
		1.	Will you provide a detailed construction schedule to within the required ten (10) days of the Notice to Proceed, per the contract?	Yes	No
		2.	Can you meet the submittal deadline?	Yes	No
		3.	It is understood that the Project schedule is critical and that that weekend and overtime work may be required to meet the milestones.	Yes	No
		4.	It is understood that if rain does occur, then all dewatering and protection of work is required, per the contract. If not, what do you believe must change and why?	Yes	No
	В.	dep	ntify critical materials, deliveries, long lead items and other pendencies, including Owner Furnished items that could affect completion of your work.	Yes	No
		2.			
		3.			
		4.			
		5.			
	C.	Do oth	you understand that there is going to be maintenance and er construction taking place on site during the course of the ject?	Yes	No

XI. EXECUTION OF WORK

	A.	Do you understand the access to the site?		Yes	No	
	В.	Do you understand the staging area restric	ctions?	Yes	No	
	C.	Have you included protection of [asphalt,	floors, and roofs]?	Yes	No	
	D.	Do you understand that the site is occupie administrators, parents, etc.?	d by students, teachers,	Yes	No	
XII.	СО	NTRACTOR COMMENTS/SUGGESTIONS:				
	1.					
	2.					
	3.					
	4.					
	5.					
Your Docu The fo the co	You agree the information contained herein is part of your contractual obligations. Your signature acknowledges your agreement to perform all Work in the Contract Documents, and that costs for all Work are included in your bid. The foregoing information is true and accurate, and I am authorized to sign as an officer of the company I am representing. [Company Name]					
Signa	ture		Title:			
Date:						
XIV.	СО	NSTRUCTION MANAGER				
Signa	ure		Title:			
Date:						

DOCUMENT 00 52 13

AGREEMENT

THIS AGREEMENT IS MADE AND ENTERED INTO THIS	DAY OF
, 20, by and between the Sacramento City	Unified School District ("District") and
	("Contractor")
("Agreement").	 ,

WITNESSETH: That the parties hereto have mutually covenanted and agreed, and by these presents do covenant and agree with each other, as follows:

15. **The Work**: Contractor agrees to furnish all tools, equipment, apparatus, facilities, labor, and material necessary to perform and complete in a good and workmanlike manner, the work of the following project:

Shade Structures Group 1B

("Project" or "Contract" or "Work")

It is understood and agreed that the Work shall be performed and completed as required in the Contract Documents including, without limitation, the Drawings and Specifications and submission of all documents required to secure funding or by the Division of the State Architect for close-out of the Project, under the direction and supervision of, and subject to the approval of, the District or its authorized representative.

- 16. **The Contract Documents**: The complete Contract consists of all Contract Documents as defined in the General Conditions and incorporated herein by this reference. Any and all obligations of the District and Contractor are fully set forth and described in the Contract Documents. All Contract Documents are intended to cooperate so that any Work called for in one and not mentioned in the other or vice versa is to be executed the same as if mentioned in all Contract Documents.
- 17. **Interpretation of Contract Documents:** Should any question arise concerning the intent or meaning of Contract Documents, including the Drawings or Specifications, the question shall be submitted to the District for interpretation. If a conflict exists in the Contract Documents, valid, written modifications, beginning with the most recent, shall control over this Agreement (if any), which shall control over the Special Conditions, which shall control over any Supplemental Conditions, which shall control over the General Conditions, which shall control over the remaining Division 0 documents, which shall control over Division 1 Documents which shall control over Division 2 through Division 49 documents, which shall control over figured dimensions, which shall control over large-scale drawings, which shall control over small-scale drawings. In the case of a discrepancy or ambiguity solely between and among the Drawings and Specifications, the discrepancy or ambiguity shall be resolved in favor of the interpretation that will provide District with the functionally complete and operable Project described in the Drawings and Specifications. In no case shall a document calling for lower quality and/or quantity material or workmanship control. The decision of the District in the matter shall be final.

- 18. **Time for Completion**: It is hereby understood and agreed that the Work under this Contract shall be completed by October 31, 2022.
- 19. **Completion Extension of Time**: Should the Contractor fail to complete this Contract, and the Work provided herein, within the time fixed for completion, due allowance being made for the contingencies provided for herein, the Contractor shall become liable to the District for all loss and damage that the District may suffer on account thereof. The Contractor shall coordinate its Work with the Work of all other contractors. The District shall not be liable for delays resulting from Contractor's failure to coordinate its Work with other contractors in a manner that will allow timely completion of Contractor's Work. Contractor shall be liable for delays to other contractors caused by Contractor's failure to coordinate its Work with the Work of other contractors.
- 20. **Liquidated Damages**: Time is of the essence for all work under this Agreement. It is hereby understood and agreed that it is and will be difficult and/or impossible to ascertain and determine the actual damage that the District will sustain in the event of and by reason of Contractor's delay; therefore, Contractor agrees that it shall pay to the District the sum of **five-hundred**_dollars (\$500.00) per day as liquidated damages for each and every day's delay beyond the time herein prescribed in completion of the Work.

It is hereby understood and agreed that this amount is not a penalty.

In the event that any portion of the liquidated damages is not paid to the District, the District may deduct that amount from any money due or that may become due the Contractor under this Agreement, and such deduction does not constitute a withholding or penalty. The District's right to assess liquidated damages is as indicated herein and in the General Conditions.

The time during which the Contract is delayed for cause, as hereinafter specified, may extend the time of completion for a reasonable time as the District may grant, provided that Contractor has complied with the claims procedure of the Contract Documents. This provision does not exclude the recovery of damages by either party under other provisions in the Contract Documents.

- 21. **Loss Or Damage**: The District and its agents and authorized representatives shall not in any way or manner be answerable or suffer loss, damage, expense, or liability for any loss or damage that may happen to the Work, or any part thereof, or in or about the same during its construction and before acceptance, and the Contractor shall assume all liabilities of every kind or nature arising from the Work, either by accident, negligence, theft, vandalism, or any cause whatsoever; and shall hold the District and its agents and authorized representatives harmless from all liability of every kind and nature arising from accident, negligence, or any cause whatsoever.
- 22. **Limitation Of District Liability:** District's financial obligations under this Contract shall be limited to the payment of the compensation provided in this Contract. Notwithstanding any other provision of this Contract, in no event shall District be liable, regardless of whether any claim is based on contract or tort, for any special, consequential, indirect or incidental damages, including, but not limited to, lost profits or revenue, lost bonding capacity, arising out of or in connection with this Contract for the services performed in connection with this Contract.

- 23. **Insurance and Bonds**: Prior to issuance of the Notice to Proceed by the District, Contractor shall provide all required certificates of insurance, insurance endorsements, and payment and performance bonds as evidence thereof.
- 24. **Prosecution of Work**: If the Contractor should neglect to prosecute the Work properly or fail to perform any provisions of this Contract, the District, may, pursuant to the General Conditions and without prejudice to any other remedy it may have, make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor.
- 25. **Authority of Architect, Project Inspector, and DSA**: Contractor hereby acknowledges that the Architect(s), the Project Inspector(s), and the Division of the State Architect ("DSA") have authority to approve and/or suspend Work if the Contractor's Work does not comply with the requirements of the Contract Documents, Title 24 of the California Code of Regulations, and all applicable laws and regulations. The Contractor shall be liable for any delay caused by its non-compliant Work.
- 26. **Assignment of Contract**: Neither the Contract, nor any part thereof, nor any moneys due or to become due thereunder, may be assigned by the Contractor without the prior written approval of the District, nor without the written consent of the Surety on the Contractor's Performance Bond (the "Surety"), unless the Surety has waived in writing its right to notice of assignment.
- 27. **Classification of Contractor's License**: Contractor hereby acknowledges that it currently holds valid Class A or B Contractor's license(s) issued by the State of California, Contractors' State License Board, in accordance with division 3, chapter 9, of the Business and Professions Code and in the classification called for in the Contract Documents.
- 28. **Registration as Public Works Contractor**: The Contractor and all Subcontractors currently are registered as public works contractors with the Department of Industrial Relations, State of California, in accordance with Labor Code section 1771.1.
- 29. **Payment of Prevailing Wages**: The Contractor and all Subcontractors shall pay all workers on all Work performed pursuant to this Contract not less than the general prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work as determined by the Director of the Department of Industrial Relations, State of California, for the type of work performed and the locality in which the work is to be performed within the boundaries of the District, pursuant to sections 1770 et seq. of the California Labor Code. The Contractor and all Subcontractors shall comply with the Davis Bacon Act, applicable reporting requirements, and any other applicable requirements for federal funding. If a conflict exists, the more stringent provision shall control over this Agreement.
- 30. **Labor Compliance Monitoring and Enforcement**: This Project is subject to labor compliance monitoring and enforcement by the Department of Industrial Relations pursuant to Labor Code section 1771.4 and Title 8 of the California Code of Regulations. Contractor specifically acknowledges and understands that it shall perform the Work of this Agreement while complying with all the applicable provisions of Division 2, Part 7, Chapter 1, of the Labor Code, including, without limitation, the requirement that the Contractor and all of its Subcontractors shall

timely submit complete and accurate electronic certified payroll records as required by the Contract Documents, or the District may not issue payment.

31. **Contract Price**: In consideration of the foregoing covenants, promises, and agreements on the part of the Contractor, and the strict and literal fulfillment of each and every covenant, promise, and agreement, and as compensation agreed upon for the Work and construction, erection, and completion as aforesaid, the District covenants, promises, and agrees that it will well and truly pay and cause to be paid to the Contractor in full, and as the full Contract Price and compensation for construction, erection, and completion of the Work hereinabove agreed to be performed by the Contractor, the following price:

		Dollars
(\$),	

in lawful money of the United States, which sum is to be paid according to the schedule provided by the Contractor and accepted by the District and subject to additions and deductions as provided in the Contract. This amount supersedes any previously stated and/or agreed to amount(s).

- 32. **No Representations:** No representations have been made other than as set forth in writing in the Contract Documents, including this Agreement. Each of the Parties to this Agreement warrants that it has carefully read and understood the terms and conditions of this Agreement and all Contract Documents, and that it has not relied upon the representations or advice of any other Party or any attorney not its own.
- 33. **Entire Agreement:** The Contract Documents, including this Agreement, set forth the entire agreement between the parties hereto and fully supersede any and all prior agreements, understandings, written or oral, between the parties hereto pertaining to the subject matter thereof.
- 34. **Severability**: If any term, covenant, condition, or provision in any of the Contract Documents is held by a court of competent jurisdiction to be invalid, void or unenforceable, the remainder of the provisions in the Contract Documents shall remain in full force and effect and shall in no way be affected, impaired, or invalidated thereby.
- 35. **Authority of Signatories**: Each party has the full power and authority to enter into and perform this Contract, and the person signing this Contract on behalf of each party has been properly authorized and empowered to enter into this Contract. This Contract may be executed in one or more counterparts, each of which shall be deemed an original. For this Agreement, and for all Contract Documents requiring a signature, a facsimile or electronic signature shall be deemed to be the equivalent of the actual original signature. All counterparts so executed shall constitute one Contract binding all the Parties hereto.

[SIGNATURES ON FOLLOWING PAGE]

IN WITNESS WHEREOF, accepted and agreed on the date indicated above:

DOCUMENT 00 56 00

ESCROW BID DOCUMENTATION

1. Requirement to Escrow Bid Documentation

- a. Contractor shall submit, within <u>SEVEN</u> (7) calendar days after the date of the Notice of Award, one copy of all documentary information received or generated by Contractor in preparation of bid prices for this Contract, as specified herein. This material is referred to herein as "Escrow Bid Documentation." The Escrow Bid Documentation of the Contractor will be held in escrow for the duration of the Contract.
- b. Contractor agrees, as a condition of award of the Contract, that the Escrow Bid Documentation constitutes all written information used in the preparation of its bid, and that no other written bid preparation information shall be considered in resolving disputes or claims. Contractor also agrees that nothing in the Escrow Bid Documentation shall change or modify the terms or conditions of the Contract Documents.
- c. The Escrow Bid Documentation will not be opened by District except as indicated herein. The Escrow Bid Documentation will be used only for the resolution of change orders and claims disputes.
- d. Contractor's submission of the Escrow Bid Documentation, as with the bonds and insurance documents required, is considered an essential part of the Contract award. Should the Contractor fail to make the submission within the allowed time specified above, District may deem the Contractor to have failed to enter into the Contract, and the Contractor shall forfeit the amount of its bid security, accompanying the Contractor's bid, and District may award the Contract to the next lowest responsive responsible bidder.
- e. NO PAYMENTS WILL BE MADE, NOR WILL DISTRICT ACCEPT PROPOSED CHANGE ORDERS UNTIL THE ABOVE REQUIRED INFORMATION IS SUBMITTED AND APPROVED.
- f. The Escrow Bid Documentation shall be submitted in person by an authorized representative of the Contractor to the District.

2. Ownership of Escrow Bid Documentation

- a. The Escrow Bid Documentation is, and shall always remain, the property of Contractor, subject to review by District, as provided herein.
- b. Escrow Bid Documentation constitute trade secrets, not known outside Contractor's business, known only to a limited extent and only by a limited number of employees of Contractor, safeguarded while in Contractor's possession, extremely valuable to Contractor, and could be extremely valuable to Contractor's competitors by virtue of reflecting Contractor's contemplated techniques of construction. Subject to the provisions herein, District agrees to safeguard the Escrow Bid Documentation, and all

information contained therein, against disclosure to the fullest extent permitted by law.

3. Format and Contents of Escrow Bid Documentation

- a. Contractor may submit Escrow Bid Documentation in its usual cost-estimating format; a standard format is not required. The Escrow Bid Documentation shall be submitted in the language (e.g., English) of the specification.
- b. Escrow Bid Documentation must clearly itemize the estimated costs of performing the work of each bid item contained in the bid schedule, separating bid items into sub-items as required to present a detailed cost estimate and allow a detailed cost review. The Escrow Bid Documentation shall include all subcontractor bids or quotes, supplier bids or quotes, quantity takeoffs, crews, equipment, calculations of rates of production and progress, copies of quotes from subcontractors and suppliers, and memoranda, narratives, add/deduct sheets, and all other information used by the Contractor to arrive at the prices contained in the bid proposal. Estimated costs should be broken down into Contractor's usual estimate categories such as direct labor, repair labor, equipment ownership and operation, expendable materials, permanent materials, and subcontract costs as appropriate. All labor rates must be broken down to specify any and all burden costs including, but not limited to, health and welfare pay, vacation and holiday pay, pension contributions, training rates, benefits of any kind, insurance of any kind, workers' compensation, liability insurance, truck expenses, supply expenses of any kind, payroll taxes, and any other taxes of any kind. Plant and equipment and indirect costs should be detailed in the Contractor's usual format. The Contractor's allocation of indirect costs, contingencies, markup, and other items to each bid item shall be identified.
- c. All costs shall be identified. For bid items amounting to less than \$10,000, estimated unit costs are acceptable without a detailed cost estimate, provided that labor, equipment, materials, and subcontracts, as applicable, are included and provided that indirect costs, contingencies, and markup, as applicable, are allocated.
- d. Bid Documentation provided by District should not be included in the Escrow Bid Documentation unless needed to comply with the following requirements.

4. Submittal of Escrow Bid Documentation

- a. The Escrow Bid Documentation shall be submitted by the Contractor in a sealed container within **SEVEN** (7) calendar days after the date of the Notice of Award. The container shall be clearly marked on the outside with the Contractor's name, date of submittal, project name and the words "Escrow Bid Documentation Intended to be opened in the presence of Authorized Representatives of Both District and Contractor".
- b. By submitting Escrow Bid Documentation, Contractor represents that the material in the Escrow Bid Documentation constitutes all the documentary information used in preparation of the bid and that the Contractor has personally examined the contents of the Escrow Bid Documentation container and has found that the documents in the container are complete.

- c. If Contractor's proposal is based upon subcontracting any part of the work, each subcontractor whose total subcontract price exceeds 5 percent of the total contract price proposed by Contractor, shall provide separate Escrow Documents to be included with those of Contractor. Those documents shall be opened and examined in the same manner and at the same time as the examination described above for Contractor.
- d. If Contractor wishes to subcontract any portion of the Work after award, District retains the right to require Contractor to submit Escrow Documents for the Subcontractor before the subcontract is approved.

5. Storage, Examination and Final Disposition of Escrow Bid Documentation

- a. The Escrow Bid Documentation will be placed in escrow, for the life of the Contract, in a mutually agreeable institution. The cost of storage will be paid by Contractor for the duration of the project until final Contract payment. The storage facilities shall be the appropriate size for all the Escrow Bid Documentation and located conveniently to both District's and Contractor's offices.
- b. The Escrow Bid Documentation shall be examined by both District and Contractor, at any time deemed necessary by either District or Contractor, to assist in the negotiation of price adjustments and change orders or the settlement of disputes and claims. In the case of legal proceedings, Escrow Bid Documentation shall be used subject to the terms of an appropriate protective order if requested by Contractor and ordered by a court of competent jurisdiction. Examination of the Escrow Bid Documentation is subject to the following conditions:
 - (1) As trade secrets, the Escrow Bid Documentation is proprietary and confidential to the extent allowed by law.
 - (2) District and Contractor shall each designate, in writing to the other party **SEVEN** (7) calendar days prior to any examination, the names of representatives who are authorized to examine the Escrow Bid Documentation. No other person shall have access to the Escrow Bid Documentation.
 - (3) Access to the documents may take place only in the presence of duly designated representatives of the District and Contractor. If Contractor fails to designate a representative or appear for joint examination on <u>SEVEN</u> (7) calendar days' notice, then the District representative may examine the Escrow Bid Documents alone upon an additional <u>THREE</u> (3) calendar days' notice if a representative of the Contractor does not appear at the time set.
 - (4) If a subcontractor has submitted sealed information to be included in the Escrow Bid Documents, access to those documents may take place only in the presence of a duly designated representative of the District, Contractor and that subcontractor. If that subcontractor fails to designate a representative or appear for joint examination on <u>SEVEN</u> (7) calendar days' notice, then the District representative and/or the

Contractor may examine the Escrow Bid Documentation without that subcontractor present upon an additional **THREE** (3) calendar days' notice if a representative of that subcontractor does not appear at the time set.

c. The Escrow Bid Documentation will be returned to Contractor at such time as the Contract has been completed and final settlement has been achieved.

DOCUMENT 00 57 00

<u>(Public Contact Code Section 22300)</u>

(Note: Contractor must use this form.)

This I	scro	w Agreement in Lieu of Ret day of	ention ("Escrow Agreement") is made and entered into . 20 . by and between
the S Avenue	acrar ue, S e add	mento City Unified School Dacramento, California 9582 dress is	
Califo	rnia	("Escrow Agent"), a st whose address is	ate or federally chartered bank in the state of
	·		
For the follow		nsideration hereinafter set	forth, District, Contractor, and Escrow Agent agree as
36.			Public Contract Code of the State of California, which is nce, Contractor has the following two (2) options:
		required to be withheld be entered into between Dis	crow Agent as a substitute for retention earnings Or District pursuant to the Construction Contract No Crict and Contractor for the
			Project, in the amount of
		dated,	Dollars (\$) , 20, (the "Contract"); or
			tractor, District shall make payments of the retention ferenced Contract directly to Escrow Agent.
	opt dep tim leas	tion), Escrow Agent shall no posit. The market value of t nes from substitution until t	securities as a substitute for Contract earnings (first bify District within ten (10) calendar days of the he securities at the time of substitution and at all he termination of the Escrow Agreement shall be at then required to be withheld as retention under the District and Contractor.
		curities shall be held in the all designate Contractor as	name of Sacramento City Unified School District, and peneficial owner.
37.	wo	uld be withheld from progre	ayments to Contractor for those funds which otherwise ess payments pursuant to Contract provisions, provided ities in form and amount specified above.

When District makes payment of retentions earned directly to Escrow Agent, Escrow Agent shall hold them for the benefit of Contractor until the time that the escrow created under this Escrow Agreement is terminated. Contractor may direct the investment of the payments into securities. All terms and conditions of this Escrow

Agreement and the rights and responsibilities of the Parties shall be equally

applicable and binding when District pays Escrow Agent directly.

38.

- 39. Contractor shall be responsible for paying all fees for the expenses incurred by Escrow Agent in administering the Escrow Account, and all expenses of District. The District will charge Contractor \$______ for each of District's deposits to the escrow account. These expenses and payment terms shall be determined by District, Contractor, and Escrow Agent.
- 40. Interest earned on securities or money market accounts held in escrow and all interest earned on that interest shall be for sole account of Contractor and shall be subject to withdrawal by Contractor at any time and from time to time without notice to District.
- 41. Contractor shall have the right to withdraw all or any part of the principal in the Escrow Account only by written notice to Escrow Agent accompanied by written authorization from District to Escrow Agent that District consents to withdrawal of amount sought to be withdrawn by Contractor.
- 42. District shall have the right to draw upon the securities and/or withdraw amounts from the Escrow Account in the event of default by Contractor. Upon seven (7) days' written notice to Escrow Agent from District of the default, if applicable, Escrow Agent shall immediately convert the securities to cash and shall distribute the cash as instructed by District. Escrow Agent shall not be authorized to determine the validity of any notice of default given by District pursuant to this paragraph, and shall promptly comply with District's instructions to pay over said escrowed assets. Escrow Agent further agrees to not interplead the escrowed assets in response to a conflicting demand.
- 43. Upon receipt of written notification from District certifying that the Contract is final and complete, and that Contractor has complied with all requirements and procedures applicable to the Contract, Escrow Agent shall release to Contractor all securities and interest on deposit less escrow fees and charges of the Escrow Account. The escrow shall be closed immediately upon disbursement of all monies and securities on deposit and payments of fees and charges.
- 44. Escrow Agent shall rely on written notifications from District and Contractor pursuant to Paragraphs 5 through 8, inclusive, of this Escrow Agreement and District and Contractor shall hold Escrow Agent harmless from Escrow Agent's release and disbursement of securities and interest as set forth above.

[REMAINDER OF PAGE INTENTIONALLY LEFT BLANK]

On behalf of District: Title Name Signature Address On behalf of Escrow Agent: Title Name Signature Address On behalf of Escrow Agent: Title Name Signature Address On behalf of Escrow Agent: Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name Signature Signature	notice on behalf of District and	orized to give written notice or to receive written on behalf of Contractor in connection with the eir respective signatures are as follows:
Name Signature Signature Address Address On behalf of Escrow Agent: Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Title Name Name	On behalf of District:	On behalf of Contractor:
Signature Address Address On behalf of Escrow Agent: Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Title Name	Title	Title
Address On behalf of Escrow Agent: Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name	Name	Name
On behalf of Escrow Agent: Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Signature	Signature
Title Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Address	Address
Name Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	On behalf of Escrow Agent:	
Signature Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Title	
Address At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Name	
At the time that the Escrow Account is opened, District and Contractor shall deliver to Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Signature	
Escrow Agent a fully executed copy of this Agreement. IN WITNESS WHEREOF, the parties have executed this Agreement by their proper officers on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name	Address	
on the date first set forth above. On behalf of District: On behalf of Contractor: Title Name Name		
Title Title Name Name		ve executed this Agreement by their proper officers
Name Name	On behalf of District:	On behalf of Contractor:
	Title	Title
Signature Signature	Name	Name
	Signature	Signature
Address Address END OF DOCUMENT		

DOCUMENT 00 61 13.13

<u>PERFORMANCE BOND</u> (100% of Contract Price)

(Note: Contractor must use this form, NOT a surety company form.)

KNOW ALL PERSONS BY THESE PRESENTS:
WHEREAS, the governing board ("Board") of the Sacramento City Unified School District, ("District") and
("Project" or "Contract") which Contract dated
WHEREAS, said Principal is required under the terms of the Contract to furnish a bond for the faithful performance of the Contract.
NOW, THEREFORE, the Principal and
and firmly bound unto the Board of the District in the penal sum of
Dollars (\$), lawful money of the United States, for the payment of which sum well and truly to be made we bind ourselves, our heirs, executors, administrators, successors, and assigns jointly and severally, firmly by these presents, to:

- Promptly perform all the work required to complete the Project; and
- Pay to the District all damages the District incurs as a result of the Principal's failure to perform all the Work required to complete the Project.

Or, at the District's sole discretion and election, the Surety shall obtain a bid or bids for completing the Contract in accordance with its terms and conditions, and upon determination by the District of the lowest responsible bidder, arrange for a contract between such bidder and the District and make available as Work progresses sufficient funds to pay the cost of completion less the "balance of the Contract Price," and to pay and perform all obligations of Principals under the Contract, including, without limitation, all obligations with respect to warranties, guarantees and the payment of liquidated damages. The term "balance of the Contract Price," as used in this paragraph, shall mean the total amount payable to Principal by the District under the Contract and any modifications thereto, less the amount previously paid by the District to the Principal, less any withholdings by the District allowed under the Contract. District shall not be required or obligated to accept a tender of a completion contractor from the Surety for any or no reason.

The condition of the obligation is such that, if the above bound Principal, its heirs, executors, administrators, successors, or assigns, shall in all things stand to and abide by, and well and truly keep and perform the covenants, conditions, and agreements in the Contract and any alteration

thereof made as therein provided, on its part to be kept and performed at the time and in the intent and meaning, including all contractual guarantees and warrantees of materials and workmanship, and shall indemnify and save harmless the District, its trustees, officers and agents, as therein stipulated, then this obligation shall become null and void, otherwise it shall be and remain in full force and virtue.

Surety expressly agrees that the District may reject any contractor or subcontractor proposed by Surety to fulfill its obligations in the event of default by the Principal. Surety shall not utilize Principal in completing the Work nor shall Surety accept a Bid from Principal for completion of the Work if the District declares the Principal to be in default and notifies Surety of the District's objection to Principal's further participation in the completion of the Work.

As a condition precedent to the satisfactory completion of the Contract, the above obligation shall hold good for a period equal to the warranty and/or guarantee period of the Contract, during which time Surety's obligation shall continue if Contractor shall fail to make full, complete, and satisfactory repair and replacements and totally protect the District from loss or damage resulting from or caused by defective materials or faulty workmanship. The obligations of Surety hereunder shall continue so long as any obligation of Contractor remains. Nothing herein shall limit the District's rights or the Contractor or Surety's obligations under the Contract, law or equity, including, but not limited to, California Code of Civil Procedure section 337.15.

The Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration, or addition to the terms of the contract or to the work to be performed thereunder or the specifications accompanying the same shall in any way affect its obligation on this bond. The Surety also stipulates and agrees that it shall not be exonerated or released from the obligation of this bond by any overpayment or underpayment by the District that is based upon estimates approved by the Architect. The Surety does hereby waive notice of any such change, extension of time, alteration, or addition to the terms of the Contract or to the work or to the specifications.

IN WITNESS WHEREOF, two (2) identical counterparts of this instrument, each of which shall for all purposes be deemed an original thereof, have been duly executed by the Principal and Surety

above named, on the day of	, 20
Principal	Surety
Ву	Ву
,	,
	Name of California Agent of Surety
	3
	Address of California Agent of Surety
	,
	Telephone No. of California Agent of Surety

Contractor must attach a Notarial Acknowledgment for all Surety's signatures and a Power of Attorney and Certificate of Authority for Surety. The California Department of Insurance must authorize the Surety to be an admitted surety insurer.

DOCUMENT 00 61 13.16

PAYMENT BOND Contractor's Labor & Material Bond (100% Of Contract Price)

(Note: Contractor must use this form, NOT a surety company form.)

KNOW ALL PERSONS BY THESE PRESENTS:
WHEREAS, the governing board ("Board") of the Sacramento City Unified School District, ("District") and
("Project" or "Contract") which Contract dated, 20, and all of the Contract Documents attached to or forming a part of the Contract, are hereby referred to and made a part hereof; and
WHEREAS, pursuant to law and the Contract, the Principal is required, before entering upon the performance of the work, to file a good and sufficient bond with the body by which the Contract is awarded in an amount equal to one hundred percent (100%) of the Contract price, to secure the claims to which reference is made in sections 9000 through 9510 and 9550 through 9566 of the Civil Code, and division 2, part 7, of the Labor Code.
NOW, THEREFORE, the Principal and
are held and firmly bound unto all laborers, material men, and other persons referred to in said statutes in the sum of
Dollars (\$), lawful money of the United States, being a sum not less than the total amount payable by the terms of Contract, for the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, successors, or assigns, jointly and severally, by these presents.
The condition of this obligation is that if the Principal or any of its subcontractors, or their heirs, executors, administrators, successors, or assigns of any, all, or either of them shall fail to pay for any labor, materials, provisions, or other supplies, used in, upon, for or about the performance of the work contracted to be done, or for any work or labor thereon of any kind, or for amounts required to be deducted, withheld, and paid over to the Employment Development Department from the wages of employees of the Principal or any of his or its subcontractors of any tier under Section 13020 of the Unemployment Insurance Code with respect to such work or labor, that the Surety will pay the same in an amount not exceeding the amount herein above set forth, and also in case suit is brought upon this bond, will pay a reasonable attorney's fee to be awarded and fixed by the court, and to be taxed as costs and to be included in the judgment therein rendered.
It is hereby expressly stipulated and agreed that this bond shall inure to the benefit of any and all persons, companies, and corporations entitled to file claims under section 9100 of

the Civil Code, so as to give a right of action to them or their assigns in any suit brought

upon this bond.

Should the condition of this bond be fully performed, then this obligation shall become null and void; otherwise it shall be and remain in full force and affect.

And the Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration, or addition to the terms of Contract or the specifications accompanying the same shall in any manner affect its obligations on this bond, and it does hereby waive notice of any such change, extension, alteration, or addition.

shall for all purposes be deemed an original the Principal and Surety above named, on the	hereof, have been duly executed by the
Principal	Surety
Ву	Ву
	Name of California Agent of Surety
	Address of California Agent of Surety
	Telephone No. of California Agent of Surety

Contractor must attach a Notarial Acknowledgment for all Surety's signatures and a Power of Attorney and Certificate of Authority for Surety. The California Department of Insurance must authorize the Surety to be an admitted surety insurer.

DOCUMENT 00 63 40

ALLOWANCE EXPENDITURE DIRECTIVE FORM

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824

ALLOWANCE EXPENDITURE DIRECTIVE NO.:

ALLOWANCE EXPENDITURE DIRECTIVE

Project:		DSA File No.:		
Bid No.:				
The following parties	agree to the terms of this Allowance Expenditure Directive	("AED"):		
Owner Name, Addr	Contractor Name, Address	, Telephone:		
Reference	Description	Allowance		
Kererence	Description	Authorized for Expenditure		
Request for AED # Requested by: Performed by: Reason:	[Description of unforeseen item relating to Work] [Requester] [Performer] [Reason]	\$		
Request for AED # Requested by: Performed by: Reason:	[Description of unforeseen item relating to Work] [Requester] [Performer] [Reason]	\$		
Request for AED # Requested by: Performed by: Reason:	[Description of unforeseen item relating to Work] [Requester] [Performer] [Reason]	\$		
	Total Contract Allowance Amount:	\$		
	Amount of Previously Approved Allowance Expenditure Directive(s):	\$		
	Amount of this Allowance Expenditure Directive:	\$		
		•		

The undersigned Contractor approves the foregoing release of allowance for completion of each specified item, and agrees to furnish all labor, materials and services and perform all work necessary to complete any additional work specified for the consideration stated therein ("Work"). Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act set forth under Government Code section 12650, et seq.

This Allowance Expenditure Directive must be signed by an authorized District representative.

It is expressly understood that the authorized allowance expenditure granted herein represents a full accord and satisfaction for any and all cost impacts of the items herein, and Contractor waives any and all further compensation based on the items herein. The value of the extra work or changes expressly includes any and all of the Contractor's costs and expenses, and its subcontractors, both direct and indirect. Any costs, expenses, or damages not included are deemed waived.

Signatures:

DISTRICT:	CONTRACTOR:
SACRAMENTO CITY UNIFIED SCHOOL DISTRICT Date:	Date:
By: [Print Name and Title here]	By: [Print Name and Title here]
ARCHITECT:	PROJECT INSPECTOR:
Date:	Date:

DOCUMENT 00 63 47

DAILY FORCE ACCOUNT REPORT

From: Contractor To: Owner [Name/Address]

Project:						
Contractor hereby submits this D Account Directive No, on		t Report f		rk perfor	med, pursuant 	to Force
	[Da	ate of Wo	rk]			
Contractor attests that the mater account work.	ial, labor, and equ	uipment it	temize	ed herein	were used only	\underline{v} on the force
A. <u>Material:</u> Attach all applicable complete the information below		ovided in _l	prior L	Daily Forc	e Account Rep	orts and
Descripti	on		Uni	t Price	Quantity	Cost
	Daily subt	otal (w/o	ut ma	rkup): \$_		
B. <u>Labor:</u> Labor must be fully B information below.	urdened. Attach t	imesheet	s, if a _l	oplicable,	and complete	the
Name	Craft	Regu Hrs		Rate	OT Hrs.	Rate

Daily subtotal (w/out markup): \$_____

C. Equipment: Attach all applicable invoices not provided in prior Daily Force Account Reports and complete the information below.

Type / Model	Hrs. Operated	Rate

Daily subtotal (w/out markup):	\$
--------------------------------	----

Complete based on information reported above.

	WORK PERFORMED OTHER THAN BY CONTRACTOR	<u>ADD</u>
(a)	<u>Material</u>	
(b)	Add Labor	
(c)	Add Equipment	
(d)	Subtotal	
(e)	Add overhead and profit for any and all tiers of Subcontractor, the total not to exceed ten percent (10%) of Item (d)	
(f)	Subtotal	
(g)	Add Overhead and Profit for Contractor, not to exceed five percent (5%) of Item (f)	
(h)	Subtotal	
(i)	Add Bond and Insurance, not to exceed two percent (2%) of Item (h)	
(j)	TOTAL	

	WORK PERFORMED BY CONTRACTOR	ADD
(a)	<u>Material</u>	
(b)	Add Labor	
(c)	Add Equipment	
(d)	<u>Subtotal</u>	
(e)	Add Overhead and Profit for Contractor, not to exceed fifteen percent (15%) of Item (d)	
(f)	<u>Subtotal</u>	
(g)	Add Bond and Insurance, not to exceed two percent (2%) of Item (f)	
(h)	TOTAL	

Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act (Gov. Code, § 12650 et seq.).

It is expressly understood that all force account work for the date stated above must be reported herein, and Contractor may not claim any labor, equipment, material or any other costs or expenses not reported herein. Contractor is not entitled to separately recover amounts for overhead or other indirect costs. Any costs, expenses, or damages, not included are deemed waived.

SUBMITTED BY:		REVIEWED BY:		
Contractor:		District:		
[Name]	Date	[Name]	Date	

District may require additional information from Contractor to review this Daily Force Account Report. Upon District's return of the Daily Force Account Report, Contractor may invoice the Work reflected therein. District's review and return of the Daily Force Account Report and/or payment for the force account work does not constitute acceptance of the Work or waiver of any Contract rights or criteria.

DOCUMENT 00 63 57

PROPOSED CHANGE ORDER FORM

5735 47th Avenue	PCO NO.:
Sacramento, CA 95824	
Project:Bid No.:	Date: DSA File No.:
RFI #:	DSA Appl. No.:

Contractor hereby submits for District's review and evaluation this Proposed Change Order ("PCO"), submitted in accordance with and subject to the terms of the Contract Documents, including Sections 17.7 and 17.8 of the General Conditions. Any spaces left blank below are deemed no change to cost or time.

Contractor understands and acknowledges that documentation supporting Contractor's PCO must be attached and included for District review and evaluation. Contractor further understands and acknowledges that failure to include documentation sufficient to, in District's discretion, support some or all of the PCO, shall result in a rejected PCO.

	WORK PERFORMED OTHER THAN BY CONTRACTOR	ADD	DEDUCT
(i)	Material (attach suppliers' invoice or itemized quantity		
	and unit cost plus sales tax)		
(j)	Add Labor (attach itemized hours and rates, fully		
	Burdened, and specify the hourly rate for each additional		
	labor burden, for example, payroll taxes, fringe benefits,		
	etc.)		
(k)	Add Equipment (attach suppliers' invoice)		
(l)	<u>Subtotal</u>		
(m)	Add overhead and profit for any and all tiers of		
	Subcontractor , the total not to exceed ten percent		
	(10%) of Item (d)		
(n)	<u>Subtotal</u>		
(0)	Add General Conditions (if Time is Compensable)		
	(attach supporting documentation)		
(p)	<u>Subtotal</u>		
(q)	Add Overhead and Profit for Contractor, not to		
	exceed five percent (5%) of Item (h)		
(r)	Subtotal		
(s)	Add Bond and Insurance, not to exceed two percent		
, ,	(2%) of Item (j)		
(t)	TOTAL		
(u)	Time (zero unless indicated; "TBD" not permitted)	Cal	 endar
		Days	

[REMAINDER OF PAGE LEFT BLANK INTENTIONALLY]

	WORK PERFORMED BY CONTRACTOR	ADD	DEDUCT
(v)	Material (attach itemized quantity and unit cost plus		
	sales tax)		
(w)	Add Labor (attach itemized hours and rates, fully		
	Burdened, and specify the hourly rate for each additional		
	labor burden, for example, payroll taxes, fringe benefits,		
	etc.)		
(x)	Add Equipment (attach suppliers' invoice)		
(y)	Add General Conditions (if Time is Compensable)		
	(attach supporting documentation)		
(z)	<u>Subtotal</u>		
(aa)	Add Overhead and Profit for Contractor, not to		
	exceed fifteen percent (15%) of Item (e)		
(bb)	<u>Subtotal</u>		
(cc)	Add Bond and Insurance, not to exceed two percent		
, ,	(2%) of Item (g)		
(dd)	TOTAL		
-			
(ee)	<u>Time</u> (zero unless indicated; "TBD" not permitted)	Cale	endar
		Days	

The undersigned Contractor approves the foregoing as to the changes, if any, to the Contract Price specified for each item, and as to the extension of time allowed, if any, for completion of the entire Work as stated herein, and agrees to furnish all labor, materials, and service, and perform all work necessary to complete any additional work specified for the consideration stated herein. Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act set forth under Government Code section 12650 et seq. It is understood that the changes herein to the Contract shall only be effective when approved by the governing board of the District.

It is expressly understood that the value of the extra Work or changes expressly includes any and all of the Contractor's costs and expenses, direct and indirect, resulting from additional time required on the Project or resulting from delay to the Project including, without limitation, cumulative impacts. Contractor is not entitled to separately recover amounts for overhead or other indirect costs. Any costs, expenses, damages, or time extensions not included are deemed waived.

SUBMITTED BY:	
Contractor:	
[Name]	Date

DOCUMENT 00 63 63

CHANGE ORDER FORM

Sacramento City Unified School District 5735 47th Avenue Sacramento, CA 95824

CHANGE ORDER NO.:	

CHANGE ORDER

Bid No.:		DSA File No.: DSA Appl. No.:			
Owner:[Name / Address]	s agree to the terms of thi	Contractor: [Name / Address] Project Inspector: [Name / Address]			
Architect:[Name / Address]					
Reference	Description		Cost	Days Ext.	
PCO # Requested by: Performed by: Reason:	[Description of chan [Requester] [Performer] [Reason]	ge]	\$		
PCO # Requested by: Performed by: Reason:	[Description of chan [Requester] [Performer] [Reason]	ge]	\$		
PCO # Requested by: Performed by: Reason:	[Description of chan [Requester] [Performer] [Reason]	ge]	\$		
Contract time will be adjusted as follows: Previous Completion Date:[Date] [#] Calendar Days Extension (zero		Original Contract Amount:	\$		
		Amount of Previously Approved Change Order(s):	\$		
unless otherwise indicated) Current Completion Date:[Date]		Amount of this Change Order:	\$		
		Contract Amount:	\$		

The undersigned Contractor approves the foregoing as to the changes, if any, to the Contract Price specified for each item, and as to the extension of time allowed, if any, for

completion of the entire work as stated therein, and agrees to furnish all labor, materials and services and perform all work necessary to complete any additional work specified for the consideration stated therein. Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act set forth under Government Code section 12650 et seq.

This change order is subject to approval by the governing board of this District and must be signed by the District. Until such time as this change order is approved by the District's governing board and executed by a duly authorized District representative, this change order is not effective and not binding.

It is expressly understood that the compensation and time, if any, granted herein represent a full accord and satisfaction for any and all time and cost impacts of the items herein, and Contractor waives any and all further compensation or time extension based on the items herein. The value of the extra work or changes expressly includes any and all of the Contractor's costs and expenses, and its subcontractors, both direct and indirect, resulting from additional time required on the project or resulting from delay to the project including without limitation, cumulative impacts. Any costs, expenses, damages or time extensions not included are deemed waived.

Signatures:			
District:		Contractor:	
[Name]	Date	[Name]	Date
Architect:		Project Inspector:	
[Name]	Date	[Name]	Date

DOCUMENT 00 65 19.26

AGREEMENT AND RELEASE OF ANY AND ALL CLAIMS

		DAY OF, 20 by and between the OOL DISTRICT ("District") and		
SACR	AMENTO CITY UNIFIED SCH "Co")	OOL DISTRICT ("District") and		
		·		
		RECITALS		
		ontractor entered into PROJECT/CONTRACT NO.:n the County of Sacramento, California; and		
Notice		er the Contract was completed on, and a d with the County Recorder on		
NOW,	THEREFORE, it is mutually	agreed between District and Contractor as follows:		
	<u> </u>	AGREEMENT AND RELEASE		
46.	Contractor will only be ass	essed liquidated damages as detailed below:		
	Original Contract Sum	\$		
	Modified Contract Sum	\$		
	Payment to Date	\$		
	Liquidated Damages	\$		
	Payment Due Contractor	\$		
47.	Subject to the provisions hereof, District shall forthwith pay to Contractor the undisputed sum of Dollars (\$) under the Contract, less any amounts represented by any notice to withhold funds on file with District as of the date of such payment.			
48.	outstanding claims in dispu under the Contract, except obligations described in Pa this Agreement and Releas full, final and general relea obligations, costs, expense District and all of its respec consultants and transferee	and hereby agrees that there are no unresolved or ute against District arising from the performance of work for the claims described in Paragraph 4 and continuing ragraph 6. It is the intention of the parties in executing se that this Agreement and Release shall be effective as a use of all claims, demands, actions, causes of action, es, damages, losses and liabilities of Contractor against ctive agents, employees, trustees, inspectors, assignees, s, except for any Disputed Claim that may be set forth in nuing obligations described in Paragraph 6 hereof.		

49. The following claims are disputed (hereinafter, the "Disputed Claims") and are specifically excluded from the operation of this Agreement and Release:

<u>Claim No.</u>	Description of Claim	Amount of Claim	<u>Date Claim</u> <u>Submitted</u>
		\$	
		\$	
		\$	
		\$	
		\$	
		\$	

[If further space is required, attach additional sheets showing the required information.]

- 50. Consistent with California Public Contract Code section 7100, Contractor hereby agrees that, in consideration of the payment set forth in Paragraph 2 hereof, Contractor hereby releases and forever discharges District, all its agents, employees, inspectors, assignees, and transferees from any and all liability, claims, demands, actions, or causes of action of whatever kind or nature arising out of or in any way concerned with the Work under the Contract.
- 51. Guarantees and warranties for the Work, and any other continuing obligation of Contractor, including without limitation, the duty to defend, indemnify and hold harmless the District, shall remain in full force and effect as specified in the Contract Documents.
- 52. Contractor hereby waives the provisions of California Civil Code section 1542 which provides as follows:

A GENERAL RELEASE DOES NOT EXTEND TO CLAIMS THAT THE CREDITOR OR RELEASING PARTY DOES NOT KNOW OR SUSPECT TO EXIST IN HIS OR HER FAVOR AT THE TIME OF EXECUTING THE RELEASE AND THAT, IF KNOWN BY HIM OR HER, WOULD HAVE MATERIALLY AFFECTED HIS OR HER SETTLEMENT WITH THE DEBTOR OR RELEASED PARTY.

53. The provisions of this Agreement and Release are contractual in nature and not mere recitals and shall be considered independent and severable. If any such provision or any part thereof shall be at any time held invalid in whole or in part under any federal, state, county, municipal, or other law, ruling, or regulations, then such provision, or part thereof, shall remain in force and effect to the extent permitted by law, and the remaining provisions of this Agreement and Release shall also remain in full force and effect, and shall be enforceable.

and execution of this Release.

* * * CAUTION: THIS IS A RELEASE - READ BEFORE EXECUTING * * *

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

Signature:

Print Name:

Title:

CONTRACTOR:

Signature:

All rights of District shall survive completion of the Work or termination of Contract,

END OF DOCUMENT

54.

DOCUMENT 00 65 36

GUARANTEE FORM (Print on Contractor/Subcontractor Letterhead)

				[Coı	ntractor	's N	ame]	hereby
unconditionally	guarantees	that t	he Work	perform	ed at	[FILL	IN	PROJECT
NAME/RFP#/A	DDRESS] has	been do	ne in acco	rdance with	n the req	uiremen	ts of th	e Contract
therefore and fur	rther guarante	es the W	ork of the	contract to	be and	remain	free of	defects in
workmanship and	d materials for	r a period	d of two (2) years fro	m and at	fter the i	recorda	tion of the
Notice of Comp	letion of the	Project	and com	pletion of	all Con	tract ob	oligatio	ns by the
Contractor, inclu	ding formal a	cceptance	e of the e	ntire Projec	ct by the	District	, unles	s a longer
guarantee period	d is called for	by the	Contract I	Documents	, in whic	ch case	the ter	ms of the
longer guarantee	shall govern.	The Co	ntractor sp	ecifically w	aives an	y right t	o claim	or rely on
the statutory de	finition of con	npletion	set forth	in Civil Cod	de sectio	n 9200.	The	Contractor
specifically acknowledge	owledges and	agrees t	that comp	letion shall	mean t	he Cont	ractor's	complete
performance of	all Work requi	ired by t	he Contra	ct Documei	nts, ame	endments	s, chan	ge orders,
construction cha	nge directives	and pu	nch lists,	and the D	istrict's	formal a	ccepta	nce of the
entire Project, w	ithout regard	to prior	occupancy	, substant	ial comp	letion de	octrine,	beneficial
occupancy, or ot	herwise. The	Contract	or hereby	agrees to r	epair or	replace -	any and	d all Work,
together with an	y adjacent Wo	rk which	may have	been dama	aged or o	displaced	in so	doing, that
may prove to be	e not in accor	rdance w	ith the re	quirements	of the	Contract	t or th	at may be
defective in its v	workmanship o	or materi	als within	the guarar	ntee peri	od speci	ified, w	ithout any
expense whatsoe	ever to the Di	istrict, or	dinary we	ar and tea	r and ur	nusual a	buse a	nd neglect
only excepted. 7	Γhe Contractor	has prov	vided conti	act bonds,	which w	ill remai	n in ful	I force and
effect during the	guarantee per	riod.						
The Contractor for	urther agrees	that with	in tan (10	\ calendar /	dave afte	r haina	notified	l in writing

The Contractor further agrees that within ten (10) calendar days after being notified in writing by the District of any Work not in accordance with the requirements of the contract or any defects in the Work, it will commence and prosecute with due diligence all Work necessary to fulfill the terms of this guarantee, and to complete the Work within a period of time stipulated in writing. In the event it fails to so comply, Contractor does hereby authorize the District to proceed to have such Work done at the Contractor's expense and it will pay the cost thereof upon demand. The District shall be entitled to all costs, including reasonable attorneys' fees, necessarily incurred upon the Contractor's refusal to pay the above costs.

The guarantee period for corrected defective work shall continue for a duration equivalent to the original guarantee period.

Notwithstanding the foregoing paragraph, in the event of an emergency constituting an immediate hazard to the health or safety of the employees of the District, or its property or licensees, the District may undertake at the Contractor's expense without prior notice, all Work necessary to correct such hazardous condition when it was caused by the Work of the Contractor not being in accordance with the requirements of this contract, or being defective, and to charge the same to the Contractor as specified in the preceding paragraph.

The guarantee set forth herein is not intended by the parties, not shall it be construed, as in any way limiting or reducing the District's rights to enforce all terms of the Contract referenced hereinabove or the time for enforcement thereof. This guarantee is provided in addition to, and not in lieu of, the District's rights on such contract.

	Spec Sections:
CONTRACTOR'S SIGNATURE	
PRINT NAME	_

SACRAMENTO CITY UNIFIED SCHOOL DISTRICT

DOCUMENT 00 72 13

GENERAL CONDITIONS

1.	CONT	RACT TERMS AND DEFINITIONS
	1.1	Definitions
	1.2	Laws Concerning the Contract
	1.3	No Oral Agreements
	1.4	No Assignment
	1.5	Notice and Service Thereof
	1.6	No Waiver
	1.7	Substitutions for Specified Items
	1.8	Materials and Work
2.	[RESE	RVED]
3.	ARCH!	ITECT
4.	CONS	TRUCTION MANAGER
5.	INSPE	CTOR, INSPECTIONS, AND TESTS
	5.1	Project Inspector
	5.2	Tests and Inspections
	5.3	Costs for After Hours and/or Off Site Inspections
6.	CONTI	RACTOR
	6.1	Status of Contractor
	6.2	Project Inspection Card(s)
	6.3	Contractor's Supervision
	6.4	Duty to Provide Fit Workers
	6.5	Field Office
	6.6	Purchase of Materials and Equipment
	6.7	Documents on Work

	6.8	Preservation of Records
	6.9	Integration of Work
	6.10	Notifications
	6.11	Obtaining of Permits, Licenses and Registrations
	6.12	Royalties and Patents
	6.13	Work to Comply With Applicable Laws and Regulations
	6.14	Safety/Protection of Persons and Property
	6.15	Working Evenings and Weekends
	6.16	Cleaning Up
7.	SUBCO	ONTRACTORS
8.	OTHER	R CONTRACTS/CONTRACTORS
9.	DRAW	INGS AND SPECIFICATIONS
10.	CONTR	RACTOR'S SUBMITTALS AND SCHEDULES
	10.1	Schedule of Work, Schedule of Submittals, and Schedule of Values
	10.2	Monthly Progress Schedule(s)
	10.3	Material Safety Data Sheets (MSDS)
11.	SITE A	ACCESS, CONDITIONS, AND REQUIREMENTS
	11.1	Site Investigation
	11.2	Soils Investigation Report
	11.3	Access to Work
	11.4	Layout and Field Engineering
	11.5	Utilities
	11.6	Sanitary Facilities
	11.7	Surveys
	11.8	Regional Notification Center
	11.9	Existing Utility Lines
	11.10	Notification

	11.11	Hazardous Materials
	11.12	No Signs
12.	TRENC	CHES
	12.1	Trenches Greater Than Five Feet
	12.2	Excavation Safety
	12.3	No Tort Liability of District
	12.4	No Excavation without Permits
	12.5	Discovery of Hazardous Waste and/or Unusual Conditions
13.	INSUR	ANCE AND BONDS
	13.1	Insurance
	13.2	Contract Security - Bonds
14.	WARR.	ANTY/GUARANTEE/INDEMNITY
	14.1	Warranty/Guarantee
	14.2	Indemnity and Defense
15.	TIME	
	15.1	Notice to Proceed
	15.2	Computation of Time / Adverse Weather
	15.3	Hours of Work
	15.4	Progress and Completion
	15.5	Schedule
	15.6	Expeditious Completion
16.	EXTEN	ISIONS OF TIME - LIQUIDATED DAMAGES
	16.1	Liquidated Damages
	16.2	Excusable Delay
	16.3	No Additional Compensation for Delays Within Contractor's Control
	16.4	Float or Slack in the Schedule
17.	CHANG	GES IN THE WORK

	17.1	No Changes Without Authorization
	17.2	Architect Authority
	17.3	Change Orders
	17.4	Construction Change Directives
	17.5	Force Account Directives
	17.6	Price Request
	17.7	Proposed Change Order
	17.8	Format for Proposed Change Order
	17.9	Change Order Certification
	17.10	Determination of Change Order Cost
	17.11	Deductive Change Orders
	17.12	Addition or Deletion of Alternate Bid Item(s)
	17.13	Discounts, Rebates, and Refunds
	17.14	Accounting Records
	17.15	Notice Required
	17.16	Applicability to Subcontractors
	17.17	Alteration to Change Order Language
	17.18	Failure of Contractor to Execute Change Order
18.	REQUE	EST FOR INFORMATION
19.	PAYME	NTS
	19.1	Contract Price
	19.2	Applications for Progress Payments
	19.3	Progress Payments
	19.4	Decisions to Withhold Payment
	19.5	Subcontractor Payments
20.	COMPL	ETION OF THE WORK
	20.1	Completion

	20.2	Close-Out/Certification Procedures		
	20.3	Final Inspection		
	20.4	Costs of Multiple Inspections		
	20.5	Partial Occupancy or Use Prior to Completion		
21.	FINAL	PAYMENT AND RETENTION		
	21.1	Final Payment		
	21.2	Prerequisites for Final Payment		
	21.3	Retention		
	21.4	Substitution of Securities		
22.	UNCOVERING OF WORK			
23.	NONC	ONFORMING WORK AND CORRECTION OF WORK		
	23.1	Nonconforming Work		
	23.2	Correction of Work		
	23.3	District's Right to Perform Work		
24.	TERMINATION AND SUSPENSION			
	24.1	District's Request for Assurances		
	24.2	District's Right to Terminate Contractor for Cause		
	24.3	Termination of Contractor for Convenience		
	24.4	Effect of Termination		
	24.5	Emergency Termination of Public Contracts Act of 1949		
	24.6	Suspension of Work		
25.	CLAIMS PROCESS			
	25.1	Obligation to File Claims for Disputed Work		
	25.2	Duty to Perform during Claim Process		
	25.3	Definition of Claim		
	25.4	Claims Presentation		
	25.5	Claim Resolution pursuant to Public Contract Code section 9204		

	25.6	Subcontractor Pass-Through Claims
	25.7	Government Code Claim Act Claim
	25.8	Claim Resolution pursuant to Public Contract Code section 20104 et seq
	25.9	Claim Procedure Compliance
	25.10	Claim Resolution Non-Applicability
	25.11	Attorney's Fees
26.	STATE	LABOR, WAGE & HOUR, APPRENTICE, AND RELATED PROVISIONS
	26.1	Labor Compliance and Enforcement
	26.2	Wage Rates, Travel, and Subsistence
	26.3	Hours of Work
	26.4	Payroll Records
	26.5	[RESERVED]
	26.6	Apprentices
	26.7	Non-Discrimination
	26.8	Labor First Aid
27.	[RESE	RVED]
28.	MISCE	LLANEOUS
	28.1	Assignment of Antitrust Actions
	28.2	Excise Taxes
	28.3	Taxes
	28.4	Shipments
	28.5	Compliance with Government Reporting Requirements

DOCUMENT 00 72 13

GENERAL CONDITIONS

1. CONTRACT TERMS AND DEFINITIONS

1.1 <u>Definitions</u>

Wherever used in the Contract Documents, the following terms shall have the meanings indicated, which shall be applicable to both the singular and plural thereof:

- **1.1.1** Adverse Weather: Shall be only weather that satisfies all of the following conditions: (1) unusually severe precipitation, sleet, snow, hail, or extreme temperature conditions in excess of the norm for the location and time of year it occurred based on the closest weather station data averaged over the past five years, (2) that is unanticipated and would cause unsafe work conditions and/or is unsuitable for scheduled work that should not be performed during inclement weather (i.e., exterior finishes), and (3) at the Project.
- **1.1.2 Allowance Expenditure Directive:** Written authorization for expenditure of allowance, if any.
- **1.1.3 Approval, Approved, and/or Accepted**: Written authorization, unless stated otherwise.
- **1.1.4** Architect (or "Design Professional in General Responsible Charge"): The individual, partnership, corporation, joint venture, or any combination thereof, named as Architect, who will have the rights and authority assigned to the Architect in the Contract Documents. The term Architect means the Design Professional in General Responsible Charge as defined in DSA PR 13-02 on this Project or the Architect's authorized representative.
- **1.1.5 As-Builts**: Reproducible blue line prints of drawings to be prepared on a monthly basis pursuant to the Contract Documents, that reflect changes made during the performance of the Work, recording differences between the original design of the Work and the Work as constructed since the preceding monthly submittal. See **Record Drawings**.
- **1.1.6 Bidder**: A contractor who intends to provide a proposal to the District to perform the Work of this Contract.
- **1.1.7 Burdened**: The labor rate for Contractor or any Subcontractor inclusive of any and all burden costs including, but not limited to, health and welfare pay, vacation and holiday pay, pension contributions, training rates, benefits of any kind, insurance of any kind, workers' compensation, liability insurance, truck expenses, supply expenses of any kind, payroll taxes, and any other taxes of any kind.
- **1.1.8 Change Order**: A written order to the Contractor authorizing an addition to, deletion from, or revision in the Work, and/or authorizing an adjustment in the Contract Price or Contract Time.

- **1.1.9 Claim**: A Dispute that remains unresolved at the conclusion of the all the applicable Dispute Resolution requirements provided herein.
- **1.1.10 Construction Change Directive**: A written order prepared and issued by the District, the Construction Manager, and/or the Architect and signed by the District and the Architect, directing a change in the Work.
- **1.1.11 Construction Manager**: The individual, partnership, corporation, joint venture, or any combination thereof, or its authorized representative, named as such by the District. If no Construction Manager is used on the Project that is the subject of this Contract, then all references to Construction Manager herein shall be read to refer to District.
- **1.1.12 Construction Schedule**: The progress schedule of construction of the Project as provided by Contractor and approved by District.
- **1.1.13 Contract, Contract Documents**: The Contract consists exclusively of the documents evidencing the agreement of the District and Contractor, identified as the Contract Documents. The Contract Documents consist of the following documents:
 - **1.1.13.1** Notice to Bidders
 - **1.1.13.2** Instructions to Bidders
 - **1.1.13.3** Bid Form and Proposal
 - **1.1.13.4** Bid Bond
 - **1.1.13.5** Designated Subcontractors List
 - **1.1.13.6** Site Visit Certification (if a site visit was required)
 - **1.1.13.7** Non-Collusion Declaration
 - **1.1.13.8** Notice of Award
 - **1.1.13.9** Notice to Proceed
 - **1.1.13.10** Agreement
 - **1.1.13.11** Escrow of Bid Documentation
 - **1.1.13.12** Escrow Agreement for Security Deposits in Lieu of Retention (if applicable)
 - 1.1.13.13 Performance Bond
 - 1.1.13.14 Payment Bond (Contractor's Labor & Material Bond)
 - **1.1.13.15** General Conditions
 - **1.1.13.16** Special Conditions (if applicable)
 - **1.1.13.17** Project Labor Agreement (if applicable)
 - **1.1.13.18** Hazardous Materials Procedures and Requirements
 - **1.1.13.19** Workers' Compensation Certification
 - **1.1.13.20** Prevailing Wage Certification
 - **1.1.13.21** Disabled Veteran Business Enterprise Participation Certification (if applicable)
 - **1.1.13.22** Drug-Free Workplace Certification (if applicable)
 - **1.1.13.23** Tobacco-Free Environment Certification
 - **1.1.13.24** Hazardous Materials Certification (if applicable)
 - **1.1.13.25** Lead-Based Materials Certification (if applicable)
 - **1.1.13.26** Imported Materials Certification (if applicable)
 - **1.1.13.27** Criminal Background Investigation/Fingerprinting Certification
 - **1.1.13.28** Buy American Certification (if certain federal funds used)
 - **1.1.13.29** Roofing Project Certification (if applicable)
 - **1.1.13.30** Registered Subcontractors List

- **1.1.13.31** Iran Contracting Act Certification (if applicable)
- **1.1.13.32** COVID-19 Vaccination/Testing Certification
- **1.1.13.33** Federal Debarment Certification (if applicable)
- **1.1.13.34** Federal Byrd Anti-Lobbying Certification (if applicable)
- 1.1.13.35 Post Bid Interview
- **1.1.13.36** All Plans, Technical Specifications, and Drawings
- **1.1.13.37** Any and all addenda to any of the above documents
- **1.1.13.38** Any and all change orders or written modifications to the above documents if approved in writing by the District
- **1.1.14 Contract Price**: The total monies payable to the Contractor under the terms and conditions of the Contract Documents.
- **1.1.15 Contract Time**: The time period stated in the Agreement for the completion of the Work.
- **1.1.16 Contractor**: The person or persons identified in the Agreement as contracting to perform the Work to be done under this Contract, or the legal representative of such a person or persons.
- **1.1.17 Daily Job Report(s)**: Daily Project reports prepared by the Contractor's employee(s) who are present on Site, which shall include the information required herein.
- **1.1.18** Day(s): Unless otherwise designated, day(s) means calendar day(s).
- **1.1.19 Department of Industrial Relations (or "DIR")**: is responsible, among other things, for labor compliance monitoring and enforcement of California prevailing wage laws and regulations for public works contracts.
- **1.1.20 Design Professional in General Responsible Charge**: See definition of **Architect** above.
- **1.1.21 Dispute**: A separate demand by Contractor for a time extension, or payment of money or damages arising from Work done by or on behalf of the Contractor pursuant to the Contract and payment of which is not otherwise expressly provided for or Contractor is not otherwise entitled to; or an amount of payment disputed by the District.
- **1.1.22 District**: The public agency or the school district for which the Work is performed. The governing board of the District or its designees will act for the District in all matters pertaining to the Contract. The District may, at any time,
 - **1.1.22.1** Direct the Contractor to communicate with or provide notice to the Construction Manager or the Architect on matters for which the Contract Documents indicate the Contractor will communicate with or provide notice to the District; and/or
 - **1.1.22.2** Direct the Construction Manager or the Architect to communicate with or direct the Contractor on matters for which the Contract Documents indicate the District will communicate with or direct the Contractor.

- **1.1.23 Drawings (or "Plans")**: The graphic and pictorial portions of the Contract Documents showing the design, location, scope and dimensions of the work, generally including plans, elevations, sections, details, schedules, sequence of operation, and diagrams.
- **1.1.24 DSA**: Division of the State Architect.
- **1.1.25 Force Account Directive**: A process that may be used when the District and the Contractor cannot agree on a price for a specific portion of work or before the Contractor prepares a price for a specific portion of work and whereby the Contractor performs the work as indicated herein on a time and materials basis.
- **1.1.26 Job Cost Reports**: Any and all reports or records detailing the costs associated with work performed on or related to the Project that Contractor shall maintain for the Project. Specifically, Job Cost Reports shall contain, but are not limited by or to, the following information: a description of the work performed or to be performed on the Project; quantity, if applicable, of work performed (hours, square feet, cubic yards, pounds, etc.) for the Project; Project budget; costs for the Project to date; estimated costs to complete the Project; and expected costs at completion. The Job Cost Reports shall also reflect all Contract cost codes, change orders, elements of non-conforming work, back charges, and additional services.
- 1.1.27 Labor Commissioner's Office (or "Labor Commissioner", also known as the Division of Labor Standards Enforcement ("DLSE")): Division of the DIR responsible for adjudicating wage claims, investigating discrimination and public works complaints, and enforcing Labor Code statutes and Industrial Welfare Commission orders.
- **1.1.28** Municipal Separate Storm Sewer System (or "MS4"): A system of conveyances used to collect and/or convey storm water, including, without limitation, catch basins, curbs, gutters, ditches, man-made channels, and storm drains.
- **1.1.29** Plans: See Drawings.
- **1.1.30 Premises**: The real property owned by the District on which the Site is located.
- **1.1.31 Product(s)**: New material, machinery, components, equipment, fixtures and systems forming the Work, including existing materials or components required and approved by the District for reuse.
- **1.1.32 Product Data**: Illustrations, standard schedules, performance charts, instructions, brochures, diagrams, and other information furnished by the Contractor to illustrate a material, product, or system for some portion of the Work.
- **1.1.33 Program Manager**: The individual, partnership, corporation, joint venture, or any combination thereof, or its authorized representative, named as such by the District. If no Program Manager is designated for Project that is the subject of this Contract, then all references to Project Manager herein shall be read to refer to District.
- **1.1.34 Project**: The planned undertaking as provided for in the Contract Documents.

- **1.1.35 Project Inspector (or "Inspector")**: The individual(s) retained by the District in accordance with title 24 of the California Code of Regulations to monitor and inspect the Project.
- **1.1.36 Project Labor Agreement (or "PLA")**: a prehire collective bargaining agreement in accordance with Public Contract Code section 2500 et seq. that establishes terms and conditions of employment for a specific construction project or projects and/or is an agreement described in Section 158(f) of Title 29 of the United States Code.
- **1.1.37 Proposed Change Order (or "PCO")**: a written request prepared by the Contractor requesting that the District and the Architect issue a Change Order based upon a proposed change to the Work.
- **1.1.38 Provide**: Shall include "provide complete in place," that is, "furnish and install," and "provide complete and functioning as intended in place" unless specifically stated otherwise.
- **1.1.39** Qualified SWPPP Practitioners (or "QSP"): certified personnel that attended a State Water Resources Control Board sponsored or approved training class and passed the qualifying exam.
- **1.1.40 Record Drawings**: Reproducible drawings (or Plans) prepared pursuant to the requirements of the Contract Documents that reflect all changes made during the performance of the Work, recording differences between the original design of the Work and the Work as constructed upon completion of the Project. See also **As-Builts**.
- **1.1.41** Request for Information (or "RFI"): A written request prepared by the Contractor requesting that the Architect provide additional information necessary to clarify or amplify an item in the Contract Documents that the Contractor believes is not clearly shown or called for in the Drawings or Specifications or other portions of the Contract Documents, or to address problems that have arisen under field conditions.
- **1.1.42** Request for Substitution for Specified Item: A request by Contractor to substitute an equal or superior material, product, thing, or service for a specific material, product, thing, or service that has been designated in the Contract Documents by a specific brand or trade name.
- **1.1.43 Safety Orders**: Written and/or verbal orders for construction issued by the California Division of Occupational Safety and Health ("CalOSHA") or by the United States Occupational Safety and Health Administration ("OSHA").
- **1.1.44 Safety Plan**: Contractor's safety plan specifically adapted for the Project. Contractor's Safety Plan shall comply with all provisions regarding Project safety, including all applicable provisions in these General Conditions.
- **1.1.45 Samples**: Physical examples that illustrate materials, products, equipment, finishes, colors, or workmanship and that, when approved in accordance with the Contract Documents, establish standards by which portions of the Work will be judged.

- **1.1.46 Shop Drawings**: All drawings, prints, diagrams, illustrations, brochures, schedules, and other data that are prepared by the Contractor, a subcontractor, manufacturer, supplier, or distributor, that illustrate how specific portions of the Work shall be fabricated or installed.
- **1.1.47 Site**: The Project site as shown on the Drawings.
- **1.1.48 Specifications**: That portion of the Contract Documents, Division 1 through Division 49, and all technical sections, and addenda to all of these, if any, consisting of written descriptions and requirements of a technical nature of materials, equipment, construction methods and systems, standards, and workmanship.
- **1.1.49 State**: The State of California.
- **1.1.50 Storm Water Pollution Prevention Plan (or "SWPPP")**: A document which identifies sources and activities at a particular facility that may contribute pollutants to storm water and contains specific control measures and time frames to prevent or treat such pollutants.
- **1.1.51 Subcontractor**: A contractor and/or supplier who is under contract with the Contractor or with any other subcontractor, regardless of tier, to perform a portion of the Work of the Project.
- **1.1.52 Submittal Schedule**: The schedule of submittals as provided by Contractor and approved by District.
- **1.1.53 Surety**: The person, firm, or corporation that executes as surety the Contractor's Performance Bond and Payment Bond, and must be a California admitted surety insurer as defined in the Code of Civil Procedure section 995.120.
- **1.1.54 Work**: All labor, materials, equipment, components, appliances, supervision, coordination, and services required by, or reasonably inferred from, the Contract Documents, that are necessary for the construction and completion of the Project.

1.2 Laws Concerning the Contract

Contract is subject to all provisions of the Constitution and laws of California and the United States governing, controlling, or affecting District, or the property, funds, operations, or powers of District, and such provisions are by this reference made a part hereof. Any provision required by law to be included in this Contract shall be deemed to be inserted.

1.3 No Oral Agreements

No oral agreement or conversation with any officer, agent, or employee of District, either before or after execution of Contract, shall affect or modify any of the terms or obligations contained in any of the documents comprising the Contract.

1.4 No Assignment

Contractor shall not assign this Contract or any part thereof including, without limitation, any Work or money to become due hereunder without the prior written consent of the

District. Assignment without District's prior written consent shall be null and void. Any assignment of money due or to become due under this Contract shall be subject to a prior lien for services rendered or material supplied for performance of work called for under this Contract in favor of all persons, firms, or corporations rendering services or supplying material to the extent that claims are filed pursuant to the Civil Code, Code of Civil Procedure, Government Code, Labor Code, and/or Public Contract Code, and shall also be subject to deductions for liquidated damages or withholding of payments as determined by District in accordance with this Contract. Contractor shall not assign or transfer in any manner to a Subcontractor or supplier the right to prosecute or maintain an action against the District.

1.5 Notice and Service Thereof

- **1.5.1** Any notice from one party to the other or otherwise under Contract shall be in writing and shall be dated and signed by the party giving notice or by a duly authorized representative of that party. Any notice shall not be effective for any purpose whatsoever unless served in one of the following manners:
 - **1.5.1.1** If notice is given by personal delivery thereof, it shall be considered delivered on the day of delivery.
 - **1.5.1.2** If notice is given by overnight delivery service, it shall be considered delivered one (1) day after date deposited, as indicated by the delivery service.
 - **1.5.1.3** If notice is given by depositing same in United States mail, enclosed in a sealed envelope, it shall be considered delivered three (3) days after date deposited, as indicated by the postmarked date.
 - **1.5.1.4** If notice is given by registered or certified mail with postage prepaid, return receipt requested, it shall be considered delivered on the day the notice is signed for.
 - **1.5.1.5** Electronic mail may be used for convenience but is not a substitute for the notice and service requirements herein.

1.6 No Waiver

The failure of District in any one or more instances to insist upon strict performance of any of the terms of this Contract or to exercise any option herein conferred shall not be construed as a waiver or relinquishment to any extent of the right to assert or rely upon any such terms or option on any future occasion. No action or failure to act by the District, Architect, or Construction Manager shall constitute a waiver of any right or duty afforded the District under the Contract, nor shall any action or failure to act constitute an approval of or acquiescence in any breach thereunder, except as may be specifically agreed in writing.

1.7 <u>Substitutions for Specified Items</u>

Unless the Special Conditions contain different provisions, Contractor shall not substitute different items for any items identified in the Contract Documents without prior written approval of the District.

1.8 Materials and Work

- **1.8.1** Except as otherwise specifically stated in this Contract, Contractor shall provide and pay for all materials, labor, tools, equipment, transportation, supervision, temporary constructions of every nature, and all other services, management, and facilities of every nature whatsoever necessary to execute and complete this Contract, in a good and workmanlike manner, within the Contract Time.
- **1.8.2** Unless otherwise specified, all materials shall be new and of the best quality of their respective kinds and grades as noted or specified, workmanship shall be of good quality, and Contractor shall use all diligence to inform itself fully as to the required manufacturer's instructions and to comply therewith.
- **1.8.3** Materials shall be furnished in ample quantities and at such times as to insure uninterrupted progress of Work and shall be stored properly and protected from the elements, theft, vandalism, or other loss or damage as required.
- **1.8.4** For all materials and equipment specified or indicated in the Drawings, the Contractor shall provide all labor, materials, equipment, and services necessary for complete assemblies and complete working systems, functioning as intended. Incidental items not indicated on Drawings, nor mentioned in the Specifications, that can legitimately and reasonably be inferred to belong to the Work described, or be necessary in good practice to provide a complete assembly or system, shall be furnished as though itemized here in every detail. In all instances, material and equipment shall be installed in strict accordance with each manufacturer's most recent published recommendations and specifications.
- **1.8.5** Contractor shall, after award of Contract by District and after relevant submittals have been reviewed, place orders for materials and/or equipment as specified so that delivery of same may be made without delays to the Work. Contractor shall, upon five (5) days' demand from District, present documentary evidence showing that orders have been placed.
- **1.8.6** District reserves the right but has no obligation, in response to Contractor's neglect or failure in complying with the above instructions, to place orders for such materials and/or equipment as the District may deem advisable in order that the Work may be completed at the date specified in the Contract, and all expenses incidental to the procuring of said materials and/or equipment shall be paid for by Contractor or deducted from payment(s) to Contractor.
- 1.8.7 Contractor warrants good title to all material, supplies, and equipment installed or incorporated in Work and agrees upon completion of all Work to deliver the Site to District, together with all improvements and appurtenances constructed or placed thereon by it, and free from any claims, liens, or charges. Contractor further agrees that neither it nor any person, firm, or corporation furnishing any materials or labor for any work covered by the Contract shall have any right to lien any portion of the Premises or any improvement or appurtenance thereon, except that Contractor may install metering devices or other equipment of utility companies or of political subdivision, title to which is commonly retained by utility company or political subdivision. In the event of installation of any such metering device or equipment, Contractor shall advise District as to owner thereof.

- **1.8.7.1** If a lien or a claim based on a stop payment notice of any nature should at any time be filed against the Work or any District property, by any entity that has supplied material or services at the request of the Contractor, Contractor and Contractor's Surety shall promptly, on demand by District and at Contractor's and Surety's own expense, take any and all action necessary to cause any such lien or a claim based on a stop payment notice to be released or discharged immediately therefrom.
- **1.8.7.2** If the Contractor fails to furnish to the District within ten (10) calendar days after demand by the District, satisfactory evidence that a lien or a claim based on a stop payment notice has been so released, discharged, or secured, the District may discharge such indebtedness and deduct the amount required therefor, together with any and all losses, costs, damages, and attorney's fees and expense incurred or suffered by District from any sum payable to Contractor under the Contract.
- **1.8.8** Nothing contained in this Article, however, shall defeat or impair the rights of persons furnishing materials or labor under any bond given by Contractor for their protection or any rights under any law permitting such protection or any rights under any law permitting such persons to look to funds due Contractor in hands of District (e.g., stop payment notices), and this provision shall be inserted in all subcontracts and material contracts and notice of its provisions shall be given to all persons furnishing material for work when no formal contract is entered into for such material.
- **1.8.9** Title to new materials and/or equipment for the Work of this Contract and attendant liability for its protection and safety shall remain with Contractor until incorporated in the Work of this Contract and accepted by District. No part of any materials and/or equipment shall be removed from its place of storage except for immediate installation in the Work of this Contract. Should the District, in its discretion, allow the Contractor to store materials and/or equipment for the Work off-site, Contractor will store said materials and/or equipment at a bonded warehouse and with appropriate insurance coverage at no cost to District. Contractor shall keep an accurate inventory of all materials and/or equipment in a manner satisfactory to District or its authorized representative and shall, at the District's request, forward it to the District.

1.8.10 [RESERVED]

2. [RESERVED]

3. ARCHITECT

- 3.1 The Architect shall represent the District during the Project and will observe the progress and quality of the Work on behalf of the District. Architect shall have the authority to act on behalf of District to the extent expressly provided in the Contract Documents and to the extent determined by District. Architect shall have authority to reject materials, workmanship, and/or the Work whenever rejection may be necessary, in Architect's reasonable opinion, to ensure the proper execution of the Contract.
- **3.2** Architect shall, with the District and on behalf of the District, determine the amount, quality, acceptability, and fitness of all parts of the Work, and interpret the

Specifications, Drawings, and shall, with the District, interpret all other Contract Documents.

- **3.3** Architect shall have all authority and responsibility established by law, including title 24 of the California Code of Regulations.
- **3.4** Contractor shall provide District and the Construction Manager with a copy of all written communication between Contractor and Architect at the same time as that communication is made to Architect, including, without limitation, all RFIs, correspondence, submittals, claims, and proposed change orders.

4. CONSTRUCTION MANAGER

- **4.1** If a Construction Manager is used on this Project ("Construction Manager" or "CM"), the Construction Manager will provide administration of the Contract on the District's behalf. After execution of the Contract and Notice to Proceed, all correspondence and/or instructions from Contractor and/or District shall be forwarded through the Construction Manager. The Construction Manager will not be responsible for and will not have control or charge of construction means, methods, techniques, sequences, or procedures or for safety precautions in connection with the Work, which shall all remain the Contractor's responsibility.
- 4.2 The Construction Manager, however, will have authority to reject materials and/or workmanship not conforming to the Contract Documents, as determined by the District, the Architect, and/or the Project Inspector. The Construction Manager shall also have the authority to require special inspection or testing of any portion of the Work, whether it has been fabricated, installed, or fully completed. Any decision made by the Construction Manager, in good faith, shall not give rise to any duty or responsibility of the Construction Manager to: the Contractor; any Subcontractor; the Contractor or Subcontractor's respective agents, employees; or other persons performing any of the Work. The Construction Manager shall have free access to any or all parts of Work at any time.
- **4.3** If the District does not use a Construction Manager on this Project, all references within the Contract Documents to Construction Manager or CM shall be read as District.

5. <u>INSPECTOR, INSPECTIONS, AND TESTS</u>

5.1 Project Inspector

- **5.1.1** One or more Project Inspector(s), including special Project Inspector(s), as required, will be assigned to the Work by District, in accordance with requirements of title 24, part 1, of the California Code of Regulations, to enforce the building code and monitor compliance with Plans and Specifications for the Project previously approved by the DSA. Duties of Project Inspector(s) are specifically defined in section 4-342 of said part 1 of title 24.
- **5.1.2** No Work shall be carried on except with the knowledge and under the inspection of the Project Inspector(s). The Project Inspector(s) shall have free access to any or all parts of Work at any time. Contractor shall furnish Project Inspector(s) reasonable opportunities for obtaining such information as may be necessary to keep Project Inspector(s) fully informed respecting progress and

manner of work and character of materials, including, but not limited to, submission of form DSA 156 (or the most current version applicable at the time the Work is performed) to the Project Inspector at least 48 hours in advance of the commencement and completion of construction of each and every aspect of the Work. Forms are available on the DSA's website at: http://www.dgs.ca.gov/dsa/Forms.aspx. Inspection of Work shall not relieve Contractor from an obligation to fulfill this Contract. Project Inspector(s) and the DSA are authorized to suspend work whenever the Contractor and/or its Subcontractor(s) are not complying with the Contract Documents. Any work

5.1.3 If Contractor and/or any Subcontractor requests that the Project Inspector(s) perform any inspection off-site, this shall only be done if it is allowable pursuant to applicable regulations and DSA approval, if the Project Inspector(s) agree to do so, and at the expense of the Contractor.

stoppage by the Project Inspector(s) and/or DSA shall be without liability to the District. Contractor shall instruct its Subcontractors and employees accordingly.

5.2 <u>Tests and Inspections</u>

- **5.2.1** Tests and Inspections shall comply with title 24, part 1, California Code of Regulations, group 1, article 5, section 4-335, and with the provisions of the Specifications.
- **5.2.2** The District will select an independent testing laboratory to conduct the tests. Selection of the materials required to be tested shall be by the laboratory or the District's representative and not by the Contractor. The Contractor shall notify the District's representative a sufficient time in advance of its readiness for required observation or inspection.
- **5.2.3** The Contractor shall notify the District's representative a sufficient time in advance of the manufacture of material to be supplied under the Contract Documents, which must by terms of the Contract Documents be tested, in order that the District may arrange for the testing of same at the source of supply. This notice shall be provided, at a minimum, seventy-two (72) hours prior to the manufacture of the material that needs to be tested.
- **5.2.4** Any material shipped by the Contractor from the source of supply prior to having satisfactorily passed such testing and inspection or prior to the receipt of notice from said representative that such testing and inspection will not be required, shall not be incorporated into and/or onto the Project.
- **5.2.5** The District will select the testing laboratory and pay for the cost of all tests and inspections, excepting those inspections performed at Contractor's request and expense. Contractor shall reimburse the District for any and all laboratory costs or other testing costs for any materials found to be not in compliance with the Contract Documents. At the District's discretion, District may elect to deduct laboratory or other testing costs for noncompliant materials from the Contract Price, and such deduction shall not constitute a withholding.

5.3 Costs for After Hours and/or Off Site Inspections

If the Contractor performs Work outside the Inspector's regular working hours or requests the Inspector to perform inspections off Site, costs of any inspections required

outside regular working hours or off Site shall be borne by the Contractor and may be invoiced to the Contractor by the District or the District may deduct those expenses from the next Progress Payment.

6. CONTRACTOR

Contractor shall construct and complete, in a good and workmanlike manner, the Work for the Contract Price including any adjustment(s) to the Contract Price pursuant to provisions herein regarding changes to the Contract Price. Except as otherwise noted, Contractor shall provide and pay for all labor, materials, equipment, permits (excluding DSA), fees, licenses, facilities, transportation, taxes, bonds and insurance, and services necessary for the proper execution and completion of the Work, except as indicated herein.

Status of Contractor

- **6.1.1** Contractor is and shall at all times be deemed to be an independent contractor and shall be wholly responsible for the manner in which it and its Subcontractors perform the services required of it by the Contract Documents. Nothing herein contained shall be construed as creating the relationship of employer and employee, or principal and agent, between the District, or any of the District's employees or agents, and Contractor or any of Contractor's Subcontractors, agents or employees. Contractor assumes exclusively the responsibility for the acts of its agents, and employees as they relate to the services to be provided during the course and scope of their employment. Contractor, its Subcontractors, agents, and its employees shall not be entitled to any rights or privileges of District employees. District shall be permitted to monitor the Contractor's activities to determine compliance with the terms of this Contract.
- **6.1.2** As required by law, Contractor and all Subcontractors shall be properly licensed and regulated by the Contractors State License Board, 9821 Business Park Drive, Sacramento, California 95827, http://www.cslb.ca.gov.
- **6.1.3** As required by law, Contractor and all Subcontractors shall be properly registered as public works contractors by the Department of Industrial Relations at: https://efiling.dir.ca.gov/PWCR/ActionServlet?action=displayPWCRegistrationForm or current URL
- **6.1.4** Contractor represents that Contractor and all Subcontractors shall not be presently debarred, suspended, proposed for disbarment, declared ineligible or excluded pursuant to either Labor Code section 1777.1 or Labor Code section 1777.7.

6.1.5 [RESERVED]

6.1.6 Contractor represents that it has no existing interest and will not acquire any interest, direct or indirect, which could conflict in any manner or degree with the performance of Work required under this Contract and that no person having any such interest shall be employed by Contractor.

6.1.7 [RESERVED]

6.1.8 If Contractor intends to make any change in the name or legal nature of the Contractor's entity, Contractor must first notify the District in writing prior to

making any contemplated change. The District shall determine in writing if Contractor's intended change is permissible while performing this Contract.

[THE REMAINDER OF THIS PAGE LEFT BLANK INTENTIONALLY]

6.2 <u>Project Inspection Card(s)</u>

Contractor shall verify that forms DSA 152 (or the current version applicable at the time the Work is performed) are issued for the Project prior to the commencement of construction.

6.3 <u>Contractor's Supervision</u>

- **6.3.1** During progress of the Work, Contractor shall keep on the Premises, and at all other locations where any Work related to the Contract is being performed, an experienced and competent project manager and construction superintendent who are employees of the Contractor, to whom the District does not object and at least one of whom shall be fluent in English, written and verbal.
- **6.3.2** The project manager and construction superintendent shall both speak fluently the predominant language of the Contractor's employees.
- 6.3.3 Before commencing the Work herein, Contractor shall give written notice to District of the name of its project manager and construction superintendent. Neither the Contractor's project manager nor construction superintendent shall be changed except with prior written notice to District. If the Contractor's project manager and/or construction superintendent proves to be unsatisfactory to Contractor, or to District, any of the District's employees, agents, the Construction Manager, or the Architect, the unsatisfactory project manager and/or construction superintendent shall be replaced. However, Contractor shall notify District in writing before any change occurs, but no less than two (2) business days prior. Any replacement of the project manager and/or construction superintendent shall be made promptly and must be satisfactory to the District. The Contractor's project manager and construction superintendent shall each represent Contractor, and all directions given to Contractor's project manager and/or construction superintendent shall be as binding as if given to Contractor.
- **6.3.4** Contractor shall give efficient supervision to Work, using its best skill and attention. Contractor shall carefully study and compare all Contract Documents, Drawings, Specifications, and other instructions and shall at once report to District, Construction Manager, and Architect any error, inconsistency, or omission that Contractor or its employees and Subcontractors may discover, in writing, with a copy to District's Project Inspector(s). The Contractor shall have responsibility for discovery of errors, inconsistencies, or omissions.

6.4 Duty to Provide Fit Workers

- **6.4.1** Contractor and Subcontractor(s) shall at all times enforce strict discipline and good order among their employees and shall not employ or work any unfit person or anyone not skilled in work assigned to that person. It shall be the responsibility of Contractor to ensure compliance with this requirement. District may require Contractor to permanently remove unfit persons from Project Site.
- **6.4.2** Any person in the employ of Contractor or Subcontractor(s) whom District may deem incompetent or unfit shall be excluded from working on the Project and shall not again be employed on the Project except with the prior written consent of District.

- **6.4.3** The Contractor shall furnish labor that can work in harmony with all other elements of labor employed or to be employed in the Work.
- **6.4.4 Fingerprinting.** Contractor shall comply with the provisions of Education Code section 45125.2 regarding the submission of employee fingerprints to the California Department of Justice and the completion of criminal background investigations of its employees, its subcontractor(s), and its subcontractors' employees. Contractor shall not permit any employee to have any contact with District pupils until such time as Contractor has verified in writing to the governing board of the District, (A) that such employee has not been convicted of a violent or serious felony, as defined in Education Code section 45122.1 and/or (B) that the prohibition does not apply to an employee as provided by Education Code section 45125.1(e)(2) or (3). Contractor shall fully complete and perform all tasks required pursuant to the Criminal Background Investigation/ Fingerprinting Certification.

6.5 Field Office

6.5.1 Contractor shall provide a temporary office on the Site for the District's use exclusively, during the term of the Contract.

6.6 Purchase of Materials and Equipment

The Contractor is required to order, obtain, and store materials and equipment sufficiently in advance of its Work at no additional cost or advance payment from District to assure that there will be no delays.

6.7 Documents on Work

Contractor shall at all times keep on the Site, or at another location as the 6.7.1 District may authorize in writing, one legible copy of all Contract Documents, including Addenda and Change Orders, and Titles 19 and 24 of the California Code of Regulations, the specified edition(s) of the Uniform Building Code, all approved Drawings, Plans, Schedules, and Specifications, and all codes and documents referred to in the Specifications, and made part thereof. These documents shall be kept in good order and available to District, Construction Manager, Architect, Architect's representatives, the Project Inspector(s), and all authorities having jurisdiction. Contractor shall be acquainted with and comply with the provisions of these titles as they relate to this Project. (See particularly the duties of Contractor, Title 24, Part 1, California Code of Regulations, section 4-343.) Contractor shall also be acquainted with and comply with all California Code of Regulations provisions relating to conditions on this Project, particularly Titles 8 and 17. Contractor shall coordinate with Architect and Construction Manager and shall submit its verified report(s) according to the requirements of Title 24.

6.7.2 Daily Job Reports.

- **6.7.2.1** Contractor shall maintain, at a minimum, at least one (1) set of Daily Job Reports on the Project. These must be prepared by the Contractor's employee(s) who are present on Site, and must include, at a minimum, the following information:
 - **6.7.2.1.1** A brief description of all Work performed on that day.

- **6.7.2.1.2** A summary of all other pertinent events and/or occurrences on that day.
- **6.7.2.1.3** The weather conditions on that day.
- **6.7.2.1.4** A list of all Subcontractor(s) working on that day, including DIR registration numbers.
- **6.7.2.1.5** A list of each Contractor employee working on that day and the total hours worked for each employee.
- **6.7.2.1.6** A complete list of all equipment on Site that day, whether in use or not.
- **6.7.2.1.7** A complete list of all materials, supplies, and equipment delivered on that day.
- **6.7.2.1.8** A complete list of all inspections and tests performed on that day.
- **6.7.2.2** Each day Contractor shall provide a copy of the previous day's Daily Job Report to the District or the Construction Manager.

6.8 Preservation of Records

Contractor shall maintain, and District shall have the right to inspect, Contractor's financial records for the Project, including, without limitation, Job Cost Reports for the Project in compliance with the criteria set forth herein. The District shall have the right to examine and audit all Daily Job Reports or other Project records of Contractor's project manager(s), project superintendent(s), and/or project foreperson(s), all certified payroll records and/or related documents including, without limitation, Job Cost Reports, payroll, payment, timekeeping and tracking documents; all books, estimates, records, contracts, documents, bid documents, bid cost data, subcontract job cost reports, and other data of the Contractor, any Subcontractor, and/or supplier, including computations and projections related to bidding, negotiating, pricing, or performing the Work or Contract modification, in order to evaluate the accuracy, completeness, and currency of the cost, manpower, coordination, supervision, or pricing data at no additional cost to the District. These documents may be duplicative and/or be in addition to any Bid Documents held in escrow by the District. The Contractor shall make available at its office at all reasonable times the materials described in this paragraph for the examination, audit, or reproduction until three (3) years after final payment under this Contract. Notwithstanding the provisions above, Contractor shall provide any records requested by any governmental agency, if available, after the time set forth above.

6.9 <u>Integration of Work</u>

- **6.9.1** Contractor shall do all cutting, fitting, patching, and preparation of Work as required to make its several parts come together properly, to fit it to receive or be received by work of other contractors, and to coordinate tolerances to various pieces of work, showing upon, or reasonably implied by, the Drawings and Specifications for the completed structure, and shall conform them as District and/or Architect may direct.
- **6.9.2** Contractor shall make its own layout of lines and elevations and shall be responsible for the accuracy of both Contractor's and Subcontractors' work resulting therefrom.
- **6.9.3** Contractor and all Subcontractors shall take all field dimensions required in performance of the Work, and shall verify all dimensions and conditions on the

Site. All dimensions affecting proper fabrication and installation of all Work must be verified prior to fabrication by taking field measurements of the true conditions. If there are any discrepancies between dimensions in drawings and existing conditions which will affect the Work, Contractor shall bring such discrepancies to the attention of the District and Architect for adjustment before proceeding with the Work. In doing so, it is recognized that Contractor is not acting in the capacity of a licensed design professional, and that Contractor's examination is made in good faith to facilitate construction and does not create an affirmative responsibility of a design professional to detect errors, omissions or inconsistencies in the Contract Documents or to ascertain compliance with applicable laws, building codes or regulations. However, nothing in this provision shall abrogate Contractor's responsibilities for discovering and reporting any error, inconsistency, or omission pursuant to the Contract within the Contractor's standard of care including, without limitation, any applicable laws, ordinance, rules, or regulations. Following receipt of written notice from Contractor, the District and/or Architect shall inform Contractor what action, if any, Contractor shall take with regard to such discrepancies.

- **6.9.4** All costs caused by noncompliant, defective, or delayed Work shall be borne by Contractor, inclusive of repair work. Schedule delays resulting from unauthorized work shall be Contractor's responsibility.
- **6.9.5** Contractor shall not endanger any work performed by it or anyone else by cutting, excavating, or otherwise altering work and shall not cut or alter work of any other contractor except with consent of District.

6.10 Notifications

- **6.10.1** Contractor shall notify the Architect and Project Inspector, in writing, of the commencement of construction of each and every aspect of the Work at least 48 hours in advance by submitting form DSA 156 (or the most current version applicable at the time the Work is performed) to the Project Inspector. Forms are available on the DSA's website at: http://www.dgs.ca.gov/dsa/Forms.aspx.
- **6.10.2** Contractor shall notify the Architect and Project Inspector, in writing, of the completion of construction of each and every aspect of the Work at least 48 hours in advance by submitting form DSA 156 (or current version) to the Project Inspector.

6.11 Obtaining of Permits, Licenses and Registrations

6.11.1 Contractor shall secure and pay for all permits (except DSA), licenses, registrations, approvals and certificates necessary for prosecution of Work, including but not limited to those listed in the Special Conditions, if any, before the date of the commencement of the Work or before the permits, licenses, registrations, approvals and certificates are legally required to continue the Work without interruption. The Contractor shall obtain and pay, only when legally required, for all licenses, registrations, approvals, permits, inspections, and inspection certificates required to be obtained from or issued by any authority having jurisdiction over any part of the Work included in the Contract. All final permits, licenses, registrations, approvals and certificates shall be delivered to District before demand is made for final payment.

- **6.11.2** General Permit For Storm Water Discharges Associated With Construction and Land Disturbance Activities.
 - **6.11.2.1** Contractor acknowledges that all California school districts are obligated to develop and implement the following requirements for the discharge of storm water to surface waters from its construction and land disturbance activities pursuant to the Clean Water Act and Porter Cologne Water Quality Act. District has determined that the construction of this Project requires enrollment in the Construction Storm Water Permit. District has filed certain submittals referred to as Permit Registration Documents ("PRDS") with the Regional Water Control Board ("Storm Water Pollution Prevention Plan" or "SWPPP").
 - **6.11.2.2** Contractor shall comply with any District SWPPP that is approved by the District and applicable to the Project, at no additional cost to the District. Contractor shall pay any fees and any penalties that may imposed by a regulatory agency for its non-compliance with the SWPPP during the course of Work.
 - **6.11.2.3** Contractor shall provide a Qualified Storm Water Practitioner ("QSP") at no additional cost to the District, who shall be onsite and implement and monitor any and all SWPPP requirements applicable to the Project, including but not limited to:
 - **6.11.2.3.1** All required visual observations, sampling, analysis, reporting and record keeping, including any Numeric Action Levels ("NALs"), if applicable;
 - **6.11.2.3.2** Rain Event Action Plan ("REAP") at least forty eight (48) hours prior to any forecasted rain event requiring implementation of the REAP, including any erosion and sediment control measures needed to protect all exposed portions of the site, if applicable;
 - **6.11.2.3.3** Active Treatment System ("ATS"), if applicable; and
 - **6.11.2.3.4** Best management practices ("BMPs").

6.12 Royalties and Patents

- **6.12.1** Contractor shall obtain and pay, only when legally required, all royalties and license fees necessary for prosecution of Work before the earlier of the date of the commencement of the Work or the date that the license is legally required to continue the Work without interruption. Contractor shall defend suits or claims of infringement of patent, copyright, or other rights and shall hold the District, the Architect, and the Construction Manager harmless and indemnify them from loss on account thereof except when a particular design, process, or make or model of product is required by the Contract Documents. However, if the Contractor has reason to believe that the required design, process, or product is an infringement of a patent or copyright, the Contractor shall indemnify and defend the District, Architect and Construction Manager against any loss or damage unless the Contractor promptly informs the District of its information.
- **6.12.2** The review by the District or Architect of any method of construction, invention, appliance, process, article, device, or material of any kind shall be only its

adequacy for the Work and shall not approve use by the Contractor in violation of any patent or other rights of any person or entity.

6.13 Work to Comply With Applicable Laws and Regulations

- **6.13.1** Contractor shall give all notices and comply with the following specific laws, ordinances, rules, and regulations and all other applicable laws, ordinances, rules, and regulations bearing on conduct of Work as indicated and specified, including but not limited to the appropriate statutes and administrative code sections. If Contractor observes that Drawings and Specifications are at variance therewith, or should Contractor become aware of the development of conditions not covered by Contract Documents that may result in finished Work being at variance therewith, Contractor shall promptly notify District in writing and any changes deemed necessary by District shall be made as provided in Contract for changes in Work.
 - 6.13.1.1 National Electrical Safety Code, U. S. Department of Commerce
 - **6.13.1.2** National Board of Fire Underwriters' Regulations
 - **6.13.1.3** International Building Code, latest addition, and the California Code of Regulations, title 24, and other amendments
 - **6.13.1.4** Manual of Accident Prevention in Construction, latest edition, published by A.G.C. of America
 - 6.13.1.5 Industrial Accident Commission's Safety Orders, State of California
 - **6.13.1.6** Regulations of the State Fire Marshall (title 19, California Code of Regulations) and Pertinent Local Fire Safety Codes
 - **6.13.1.7** Americans with Disabilities Act
 - **6.13.1.8** Education Code of the State of California
 - **6.13.1.9** Government Code of the State of California
 - **6.13.1.10**Labor Code of the State of California, division 2, part 7, Public Works and Public Agencies
 - **6.13.1.11** Public Contract Code of the State of California
 - **6.13.1.12**California Art Preservation Act
 - **6.13.1.13**U. S. Copyright Act
 - **6.13.1.14**U. S. Visual Artists Rights Act
- **6.13.2** Contractor shall comply with all applicable mitigation measures, if any, adopted by any public agency with respect to this Project pursuant to the California Environmental Quality Act (Public Resources Code section 21000 et seq.).

- **6.13.3** If Contractor performs any Work that it knew, or through exercise of reasonable care should have known, to be contrary to any applicable laws, ordinance, rules, or regulations, Contractor shall bear all costs arising therefrom and arising from the correction of said Work.
- **6.13.4** Where Specifications or Drawings state that materials, processes, or procedures must be approved by the DSA, State Fire Marshall, or other body or agency, Contractor shall be responsible for satisfying requirements of such bodies or agencies applicable at the time the Work is performed, and as determined by those bodies or agencies.

6.13.5 [RESERVED]

6.14 <u>Safety/Protection of Persons and Property</u>

- **6.14.1** The Contractor will be solely and completely responsible for conditions of the Site, including safety of all persons and property during performance of the Work. This requirement will apply continuously and not be limited to normal working hours.
- **6.14.2** The wearing of hard hats will be mandatory at all times for all personnel on Site. Contractor shall supply sufficient hard hats to properly equip all employees and visitors.
- **6.14.3** Any construction review of the Contractor's performance is not intended to include review of the adequacy of the Contractor's safety measures in, on, or near the Site.
- **6.14.4** Implementation and maintenance of safety programs shall be the sole responsibility of the Contractor.
- **6.14.5** The Contractor shall furnish to the District a copy of the Contractor's safety plan within the time frame indicated in the Contract Documents and specifically adapted for the Project.
- **6.14.6** Contractor shall be responsible for all damages to persons or property that occur as a result of its fault or negligence in connection with the prosecution of this Contract and shall take all necessary measures and be responsible for the proper care and completion and final acceptance by District. All Work shall be solely at Contractor's risk with the exception of damage to the Work caused by "acts of God" as defined in Public Contract Code section 7105.
- **6.14.7** Contractor shall take, and require Subcontractors to take, all necessary precautions for safety of workers on the Project and shall comply with all applicable federal, state, local, and other safety laws, standards, orders, rules, regulations, and building codes to prevent accidents or injury to persons on, about, or adjacent to premises where Work is being performed and to provide a safe and healthful place of employment. Contractor shall furnish, erect, and properly maintain at all times, all necessary safety devices, safeguards, construction canopies, signs, nets, barriers, lights, and watchmen for protection of workers and the public and shall post danger signs warning against hazards created by such features in the course of construction.

- **6.14.8** Hazards Control Contractor shall store volatile wastes in covered metal containers and remove them from the Site daily. Contractor shall prevent accumulation of wastes that create hazardous conditions. Contractor shall provide adequate ventilation during use of volatile or noxious substances.
- **6.14.9** Contractor shall designate a responsible member of its organization on the Project, whose duty shall be to post information regarding protection and obligations of workers and other notices required under occupational safety and health laws, to comply with reporting and other occupational safety requirements, and to protect the life, safety, and health of workers. Name and position of person so designated shall be reported to District by Contractor.
- **6.14.10** Contractor shall correct any violations of safety laws, rules, orders, standards, or regulations. Upon the issuance of a citation or notice of violation by the Division of Occupational Safety and Health, Contractor shall correct such violation promptly.
- **6.14.11** Contractor shall comply with any District storm water requirements that are approved by the District and applicable to the Project, at no additional cost to the District.
- **6.14.12** In an emergency affecting safety of life or of work or of adjoining property, Contractor, without special instruction or authorization, shall act, at its discretion, to prevent such threatened loss or injury. Any compensation claimed by Contractor on account of emergency work shall be determined by agreement.
- **6.14.13** All salvage materials will become the property of the Contractor and shall be removed from the Site unless otherwise called for in the Contract Documents. However, the District reserves the right to designate certain items of value that shall be turned over to the District unless otherwise directed by District.
- **6.14.14** All connections to public utilities and/or existing on-site services, including, without limitation, internet, phone and data connections, shall be made and maintained in such a manner as to not interfere with the continuing use of same by the District during the entire progress of the Work.
- **6.14.15** Contractor shall provide such heat, covering, and enclosures as are necessary to protect all Work, materials, equipment, appliances, and tools against damage by weather conditions, such as extreme heat, cold, rain, snow, dry winds, flooding, or dampness.
- **6.14.16** The Contractor shall protect and preserve the Work from all damage or accident, providing any temporary roofs, window and door coverings, boxings, or other construction as required by the Architect. The Contractor shall be responsible for existing structures, walks, roads, trees, landscaping, and/or improvements in working areas; and shall provide adequate protection therefore. If temporary removal is necessary of any of the above items, or damage occurs due to the Work, the Contractor shall replace same at his expense with same kind, quality, and size of Work or item damaged. This shall include any adjoining property of the District and others.
- **6.14.17** Contractor shall take adequate precautions to protect existing roads, sidewalks, curbs, pavements, utilities, adjoining property, and structures (including,

without limitation, protection from settlement or loss of lateral support), and to avoid damage thereto, and repair any damage thereto caused by construction operations.

- **6.14.18** Contractor shall confine apparatus, the storage of materials, and the operations of workers to limits indicated by law, ordinances, permits, or directions of Architect, and shall not interfere with the Work or unreasonably encumber Premises or overload any structure with materials. Contractor shall enforce all instructions of District and Architect regarding signs, advertising, fires, and smoking, and require that all workers comply with all regulations while on Project Site.
- **6.14.19** Contractor, Contractor's employees, Subcontractors, Subcontractors' employees, or any person associated with the Work shall conduct themselves in a manner appropriate for a school site. No verbal or physical contact with neighbors, students, and faculty, profanity, or inappropriate attire and/or logos, or behavior will be permitted. District may require Contractor to temporarily or permanently remove non-complying persons from Project Site.
- **6.14.20** Contractor shall take care to prevent disturbing or covering any survey markers, monuments, or other devices marking property boundaries or corners. If such markers are disturbed, Contractor shall have a civil engineer, registered as a professional engineer in California, replace them at no cost to District.
- **6.14.21** In the event that the Contractor enters into any agreement with owners of any adjacent property to enter upon the adjacent property for the purpose of performing the Work, Contractor shall fully indemnify, defend, and hold harmless each person, entity, firm, or agency that owns or has any interest in adjacent property. The form and content of the agreement of indemnification shall be approved by the District prior to the commencement of any Work on or about the adjacent property. The Contractor shall also indemnify the District as provided in the indemnification provision herein. These provisions shall be in addition to any other requirements of the owners of the adjacent property.

6.15 Working Evenings and Weekends

Contractor may be required to work increased hours, evenings, and/or weekends at no additional cost to the District. Contractor shall give the District seventy-two (72) hours' notice prior to performing any evening and/or weekend work. Contractor shall perform all evening and/or weekend work only upon District's approval and in compliance with all applicable rules, regulations, laws, and local ordinances including, without limitation, all noise and light limitations. Contractor shall reimburse the District for any increased or additional Inspector charges as a result of Contractor's increased hours, or evening and/or weekend work.

6.16 Cleaning Up

6.16.1 The Contractor shall provide all services, labor, materials, and equipment necessary for protecting and securing the Work, all school occupants, furnishings, equipment, and building structure from damage until its completion and final acceptance by District. Dust barriers shall be provided to isolate dust and dirt from construction operations. At completion of the Work and portions thereof, Contractor shall clean to the original state any areas beyond the Work area that become dust laden as a result of the Work. The Contractor must erect the necessary warning signs and barricades to ensure the safety of all school occupants. The Contractor at

all times must maintain good housekeeping practices to reduce the risk of fire damage and must make a fire extinguisher, fire blanket, and/or fire watch, as applicable, available at each location where cutting, braising, soldering, and/or welding is being performed or where there is an increased risk of fire.

- **6.16.2** Contractor at all times shall keep Premises, including property immediately adjacent thereto, free from debris such as waste, rubbish (including personal rubbish of workers, e.g., food wrappers, etc.), and excess materials and equipment caused by the Work. Contractor shall not leave debris under, in, or about the Premises (or surrounding property or neighborhood), but shall promptly remove same from the Premises on a daily basis. If Contractor fails to clean up, District may do so and the cost thereof shall be charged to Contractor. If Contract is for work on an existing facility, Contractor shall also perform specific clean-up on or about the Premises upon request by the District as it deems necessary for continued operations. Contractor shall comply with all related provisions of the Specifications.
- **6.16.3** If the Construction Manager, Architect, or District observes the accumulation of trash and debris, the District will give the Contractor a 24-hour written notice to mitigate the condition.
- **6.16.4** Should the Contractor fail to perform the required clean-up, or should the clean-up be deemed unsatisfactory by the District, the District may, at its sole discretion, then perform the clean-up. All cost associated with the clean-up work (including all travel, payroll burden, and costs for supervision) will be deducted from the Contract Price.

6.17 No Relief from Obligations Based on Review by Other Persons

6.17.1 Contractor shall not be relieved of obligations to perform the Work in accordance with the Contract Documents by act or omission of the District, Architect, Construction Manager, Project Inspector, or DSA or other entities having jurisdiction including, but not limited to, administration of the Contract, review of submittals, or by tests, observation, inspection, or permit/interconnection approvals.

7. SUBCONTRACTORS

- <u>7.1</u> Contractor shall provide the District with information for all Subcontracts as indicated in the Contractor's Submittals and Schedules Section herein.
- **7.2** No contractual relationship exists between the District and any Subcontractor, supplier, or sub-subcontractor by reason of this Contract.
- 7.3 Contractor agrees to bind every Subcontractor by terms of this Contract as far as those terms that are applicable to Subcontractor's work including, without limitation, all labor, wage & hour, apprentice and related provisions and requirements. If Contractor shall subcontract any part of this Contract, Contractor shall be as fully responsible to District for acts and omissions of any Subcontractor and of persons either directly or indirectly employed by any Subcontractor, including Subcontractor caused Project delays, as it is for acts and omissions of persons directly employed by Contractor. The divisions or sections of the Specifications and/or the arrangement of the drawings are not intended to control the Contractor in dividing the Work among Subcontractors or limit the work performed by any trade.

- **7.4** District's consent to, or approval of, or failure to object to, any Subcontractor under this Contract shall not in any way relieve Contractor of any obligations under this Contract and no such consent shall be deemed to waive any provisions of this Contract.
- 7.5 Contractor is directed to familiarize itself with sections 4100 through 4114 of the Public Contract Code of the State of California, as regards subletting and subcontracting, and to comply with all applicable requirements therein. In addition, Contractor is directed to familiarize itself with sections 1720 through 1861 of the Labor Code of the State of California, as regards the payment of prevailing wages and related issues, and to comply with all applicable requirements therein including, without limitation, section 1775 and the Contractor's and Subcontractors' obligations and liability for violations of prevailing wage law and other applicable laws.
- **7.6** No Contractor whose Bid is accepted shall, without consent of the awarding authority and in full compliance with section 4100 et seq. of the Public Contract Code, including, without limitation, sections 4107, 4107.5, and 4109 of the Public Contract Code, and section 1771.1 of the Labor Code, either:
 - **7.6.1** Substitute any person as a Subcontractor in place of the Subcontractor designated in the original Bid; or
 - **7.6.2** Permit any Subcontract to be assigned or transferred, or allow any portion of the Work to be performed by anyone other than the original Subcontractor listed in the Bid; or
 - **7.6.3** Sublet or subcontract any portion of the Work in excess of one-half of one percent (0.5%) of the Contractor's total bid as to which his original bid did not designate a Subcontractor.
- **7.7** The Contractor shall be responsible for the coordination of the trades, Subcontractors, sub-subcontractors, and material or equipment suppliers working on the Project.
 - **7.7.1** If the Contract is valued at \$1 million or more and uses, or plans to use, state bond funds, then Contractor is responsible for ensuring that first tier Subcontractors holding C-4, C-7, C-10, C-16, C-20, C-34, C-36, C-38, C-42, C-43, and/or C-46 licenses are prequalified by the District to work on the Project pursuant to Public Contract Code section 20111.6.
 - **7.7.2** Contractor is responsible for ensuring that all Subcontractors are properly registered as public works contractors by the Department of Industrial Relations.
- **7.8** Contractor is solely responsible for settling any differences between the Contractor and its Subcontractor(s) or between Subcontractors.
- **7.9** Contractor must include in all of its subcontracts the assignment provisions as indicated in the Termination section of these General Conditions.

8. OTHER CONTRACTS/CONTRACTORS

8.1 District reserves the right to let other contracts, and/or to perform work with its own forces, in connection with the Project. Contractor shall afford other contractors reasonable opportunity for introduction and storage of their materials and execution of

their work and shall properly coordinate and connect Contractor's Work with the work of other contractors.

- **8.2** In addition to Contractor's obligation to protect its own Work, Contractor shall protect the work of any other contractor that Contractor encounters while working on the Project.
- 8.3 If any part of Contractor's Work depends for proper execution or results upon work of District or any other contractor, the Contractor shall inspect and, before proceeding with its Work, promptly report to the District in writing any defects in District's or any other contractor's work that render Contractor's Work unsuitable for proper execution and results. Contractor shall be held accountable for damages to District for District's or any other contractor's work that Contractor failed to inspect or should have inspected. Contractor's failure to inspect and report shall constitute Contractor's acceptance of all District's or any other contractor's work as fit and proper for reception of Contractor's Work, except as to defects that may develop in District's or any other contractor's work after execution of Contractor's Work and not caused by execution of Contractor's Work.
- **8.4** To ensure proper execution of its subsequent work, Contractor shall measure and inspect work already in place and shall at once report to the District in writing any discrepancy between that executed work and the Contract Documents.
- **8.5** Contractor shall ascertain to its own satisfaction the scope of the Project and nature of District's or any other contracts that have been or may be awarded by District in prosecution of the Project to the end that Contractor may perform this Contract in light of the other contracts, if any.
- **8.6** Nothing herein contained shall be interpreted as granting to Contractor exclusive occupancy of the Site, the Premises, or of the Project. Contractor shall not cause any unnecessary hindrance or delay to the use and/or operation(s) of the Premises and/or to District or any other contractor working on the Project. If simultaneous execution of any contract or Premises operation is likely to cause interference with performance of Contractor's Contract, Contractor shall coordinate with those contractor(s), person(s), and/or entity(s) and shall notify the District of the resolution.

9. DRAWINGS AND SPECIFICATIONS

- **9.1** A complete list of all Drawings that form a part of the Contract is to be found as an index on the Drawings themselves, and/or may be provided to the Contractor and/or in the Table of Contents.
- **9.2** Materials or Work described in words that so applied have a well-known technical or trade meaning shall be deemed to refer to recognized standards, unless noted otherwise.
- **9.3 Trade Name or Trade Term.** It is not the intention of this Contract to go into detailed descriptions of any materials and/or methods commonly known to the trade under "trade name" or "trade term." The mere mention or notation of "trade name" or "trade term" shall be considered a sufficient notice to Contractor that it will be required to complete the work so named, complete, finished, and operable, with all its appurtenances, according to the best practices of the trade.

- **9.4** The naming of any material and/or equipment shall mean furnishing and installing of same, including all incidental and accessory items thereto and/or labor therefor, as per best practices of the trade(s) involved, unless specifically noted otherwise.
- **9.5** Contract Documents are complementary, and what is called for by one shall be binding as if called for by all. As such, Drawings and Specifications are intended to be fully cooperative and to agree. However, if Contractor observes that Drawings and Specifications are in conflict with the Contract Documents, Contractor shall promptly notify District and Architect in writing, and any necessary changes shall be made as provided in the Contract Documents.
- 9.6 In the case of discrepancy or ambiguity in the Contract Documents, the order of precedence in the Agreement shall prevail. However, in the case of discrepancy or ambiguity solely between and among the Drawings and Specifications, the discrepancy or ambiguity shall be resolved in favor of the interpretation that will provide District with the functionally complete and operable Project described in the Drawings and Specifications. In case of ambiguity, conflict, or lack of information, District will furnish clarifications with reasonable promptness.
- **9.7** Drawings and Specifications are intended to comply with all laws, ordinances, rules, and regulations of constituted authorities having jurisdiction, and where referred to in the Contract Documents, the laws, ordinances, rules, and regulations shall be considered as a part of the Contract within the limits specified. Contractor shall bear all expense of correcting work done contrary to said laws, ordinances, rules, and regulations.
- **9.8** As required by Section 4-317(c), Part 1, Title 24, CCR: "Should any existing conditions such as deterioration or non-complying construction be discovered which is not covered by the DSA-approved documents wherein the finished work will not comply with Title 24, California Code of Regulations, a construction change document, or a separate set of plans and specifications, detailing and specifying the required repair work shall be submitted to and approved by DSA before proceeding with the repair work."

9.9 Ownership of Drawings

All copies of Plans, Drawings, Designs, Specifications, and copies of other incidental architectural and engineering work, or copies of other Contract Documents furnished by District, are the property of District. They are not to be used by Contractor in other work and, with the exception of signed sets of Contract Documents, are to be returned to District on request at completion of Work, or may be used by District as it may require without any additional costs to District. Neither the Contractor nor any Subcontractor, or material or equipment supplier shall own or claim a copyright in the Drawings, Specifications, and other documents prepared by the Architect. District hereby grants the Contractor, Subcontractors, sub-subcontractors, and material or equipment suppliers a limited license to use applicable portions of the Drawings prepared for the Project in the execution of their Work under the Contract Documents.

10. CONTRACTOR'S SUBMITTALS AND SCHEDULES

Contractor's submittals shall comply with the provisions and requirements of the Specifications including, without limitation Submittals.

10.1 <u>Schedule of Work, Schedule of Submittals, and Schedule of Values</u>

- **10.1.1** Within **TEN (10)** calendar days after the date of the Notice to Proceed (unless otherwise specified in the Specifications), the Contractor shall prepare and submit to the District for review, in a form supported by sufficient data to substantiate its accuracy as the District may require:
 - **10.1.1.1** Preliminary Schedule. A preliminary schedule of construction indicating the starting and completion dates of the various stages of the Work, including any information and following any form as may be specified in the Specifications. Once approved by District, this shall become the Construction Schedule. This schedule shall include and identify all tasks that are on the Project's critical path with a specific determination of the start and completion of each critical path task as well as all Contract milestones and each milestone's completion date(s) as may be required by the District.
 - **10.1.1.1.1** The District is not required to approve a preliminary schedule of construction with early completion, i.e., one that shows early completion dates for the Work and/or milestones. Contractor shall not be entitled to extra compensation if the District approves a Construction Schedule with an early completion date and Contractor completes the Project beyond the date shown in the schedule but within the Contract Time. A Construction Schedule showing the Work completed in less than the Contract Time, the time between the early completion date and the end of the Contract Time shall be Float.
 - **10.1.1.2** Preliminary Schedule of Values. A preliminary schedule of values for all of the Work, which must include quantities and prices of items aggregating the Contract Price and must subdivide the Work into component parts in sufficient detail to serve as the basis for progress payments during construction. Unless the Special Conditions contain different limits, this preliminary schedule of values shall include, at a minimum, the following information and the following structure:
 - **10.1.1.2.1** Divided into at least the following categories:

```
10.1.1.2.1.1
                 Overhead and profit;
10.1.1.2.1.2
                 Supervision;
10.1.1.2.1.3
                 General conditions;
10.1.1.2.1.4
                 Lavout:
10.1.1.2.1.5
                Mobilization;
10.1.1.2.1.6
                Submittals;
10.1.1.2.1.7
                 Bonds and insurance;
                 Close-out/Certification documentation;
10.1.1.2.1.8
10.1.1.2.1.9
                Demolition:
10.1.1.2.1.10
                Installation;
10.1.1.2.1.11
                Rough-in;
10.1.1.2.1.12
                Finishes;
10.1.1.2.1.13
                Testing;
10.1.1.2.1.14
                 Punchlist and District acceptance.
```

10.1.1.2.2 And also divided by each of the following areas:

- **10.1.1.2.2.1** Site work;
- **10.1.1.2.2.2** By each building;
- **10.1.1.2.2.3** By each floor.
- **10.1.1.2.3** The preliminary schedule of values shall not provide for values any greater than the following percentages of the Contract value:
 - **10.1.1.2.3.1** Mobilization and layout combined to equal not more than 1%;
 - **10.1.1.2.3.2** Submittals, samples and shop drawings combined to equal not more than 3%:
 - **10.1.1.2.3.3** Bonds and insurance combined to equal not more than 2%.
 - **10.1.1.2.3.4** Closeout documentation shall have a value in the preliminary schedule of not less than 5%.
- **10.1.1.2.4** Notwithstanding any provision of the Contract Documents to the contrary, payment of the Contractor's overhead, supervision, general conditions costs, and profit, as reflected in the Cost Breakdown, shall be paid based on percentage complete, with the disbursement of Progress Payments and the Final Payment.
- **10.1.1.2.5** Contractor shall certify that the preliminary schedule of values as submitted to the District is accurate and reflects the costs as developed in preparing Contractor's bid. For example, without limiting the foregoing, Contractor shall not "front-load" the preliminary schedule of values with dollar amounts greater than the value of activities performed early in the Project.
- **10.1.1.2.6** The preliminary schedule of values shall be subject to the District's review and approval of the form and content thereof. In the event that the District objects to any portion of the preliminary schedule of values, the District shall notify the Contractor, in writing, of the District's objection(s) to the preliminary schedule of values. Within five (5) calendar days of the date of the District's written objection(s), Contractor shall submit a revised preliminary schedule of values to the District for review and approval. The foregoing procedure for the preparation, review and approval of the preliminary schedule of values shall continue until the District has approved the entirety of the preliminary schedule of values.
- **10.1.1.2.7** Once the preliminary schedule of values is approved by the District, this shall become the Schedule of Values. The Schedule of Values shall not be thereafter modified or amended by the Contractor without the prior consent and approval of the District, which may be granted or withheld in the sole discretion of the District.
- **10.1.1.3** Preliminary Schedule of Submittals. A preliminary schedule of submittals, including Shop Drawings, Product Data, and Samples submittals. Once approved by District, this shall become the Submittal Schedule. All submittals shall be forwarded to the District by the date indicated on the approved Submittal Schedule, unless an earlier date is necessary to maintain the Construction Schedule, in which case those submittals shall be forwarded to the District so as not to delay the Construction Schedule. Upon request by the District, Contractor shall provide an electronic copy of all submittals to the

District. All submittals shall be submitted no later than 90 days after the Notice to Proceed.

- **10.1.1.4** <u>Safety Plan.</u> Contractor's Safety Plan specifically adapted for the Project. Contractor's Safety Plan shall comply with the following requirements:
 - **10.1.1.4.1** All applicable requirements of California Division of Occupational Safety and Health ("CalOSHA") and/or of the United States Occupational Safety and Health Administration ("OSHA").
 - **10.1.1.4.2** All provisions regarding Project safety, including all applicable provisions in these General Conditions.
 - **10.1.1.4.3** Contractor's Safety Plan shall be in English and in the language(s) of the Contractor's and its Subcontractors' employees.
- **10.1.1.5** <u>Complete Registered Subcontractors List.</u> The name, address, telephone number, facsimile number, California State Contractors License number, classification, DIR registration number and monetary value of all Subcontracts of any tier for parties furnishing labor, material, or equipment for completion of the Project.
- **10.1.2** Contractor must provide all schedules both in hard copy and electronically, in a format (e.g., Microsoft Project or Primavera) approved in advance by the District.
- **10.1.3** The District will review the schedules submitted and the Contractor shall make changes and corrections in the schedules as requested by the District and resubmit the schedules until approved by the District.
- **10.1.4** The District shall have the right at any time to revise the schedule of values if, in the District's sole opinion, the schedule of values does not accurately reflect the value of the Work performed.
- **10.1.5** All schedules must be approved by the District before Contractor can rely on them as a basis for payment.

10.2 <u>Monthly Progress Schedule(s)</u>

- **10.2.1** Contractor shall provide Monthly Progress Schedule(s) to the District. A Monthly Progress Schedule shall update the approved Construction Schedule or the last Monthly Progress Schedule, showing all work completed and to be completed as well as updating the Registered Subcontractors List. The monthly Progress Schedule shall be sent within the timeframe requested by the District and shall be in a format acceptable to the District and contain a written narrative of the progress of work that month and any changes, delays, or events that may affect the work. The process for District approval of the Monthly Progress Schedule shall be the same as the process for approval of the Construction Schedule.
- **10.2.2** Contractor shall submit Monthly Progress Schedule(s) with all payment applications.

- **10.2.3** Contractor must provide all schedules both in hard copy and electronically, in a format (e.g., Microsoft Project or Primavera) approved in advance by the District.
- **10.2.4** The District will review the schedules submitted and the Contractor shall make changes and corrections in the schedules as requested by the District and resubmit the schedules until approved by the District.
- **10.2.5** The District shall have the right at any time to revise the schedule of values if, in the District's sole opinion, the schedule of values does not accurately reflect the value of the Work performed.
- **10.2.6** All schedules must be approved by the District before Contractor can rely on them as a basis for payment.

10.3 <u>Material Safety Data Sheets (MSDS)</u>

Contractor is required to ensure Material Safety Data Sheets are available in a readily accessible place at the Site for any material requiring a Material Safety Data Sheet per the federal "Hazard Communication" standard, or employees' "right to know" law. The Contractor is also required to ensure proper labeling on substances brought onto the job site and that any person working with the material or within the general area of the material is informed of the hazards of the substance and follows proper handling and protection procedures. Two additional copies of the Material Safety Data Sheets shall also be submitted directly to the District.

10.4 Submittals

10.4.1 Architect's favorable review shall neither be construed as a complete check nor relieve the Contractor, Subcontractor, manufacturer, fabricator, or supplier from responsibility for any deficiency that may exist or from any departures or deviations from the requirements of the Contract Documents unless the Contractor has, in writing, called Architect's attention to the deviations at the time of submission and the Architect has given specific written response. "Favorable review" shall mean merely that Architect has no objection to Contractor using, upon Contractor's own full responsibility, plan or method of Work proposed, or furnishing materials or equipment proposed.

11. SITE ACCESS, CONDITIONS, AND REQUIREMENTS

11.1 Site Investigation

Before bidding on this Work, Contractor shall make a careful investigation of the Site and thoroughly familiarize itself with the requirements of the Contract. By the act of submitting a bid for the Work included in this Contract, Contractor shall be deemed to have made a complete study and investigation, and to be familiar with and accepted the existing conditions of the Site.

Prior to commencing the Work, Contractor and the District's representative shall survey the Site to document the condition of the Site. Contractor will record the survey in digital videotape format and provide an electronic copy to the District within fourteen (14) days of the survey. This electronic record shall serve as a basis for determining any damages caused by the Contractor during the Project. The Contractor may also

document any pre-existing conditions in writing, provided that both the Contractor and the District's representative agree on said conditions and sign a memorandum documenting the same.

11.2 <u>Soils Investigation Report</u>

- **11.2.1** When a soils investigation report obtained from test holes at Site or for the Project is available, that report may be available to the Contractor but shall not be a part of this Contract and shall not alleviate or excuse the Contractor's obligation to perform its own investigation. Any information obtained from that report or any information given on Drawings as to subsurface soil condition or to elevations of existing grades or elevations of underlying rock is approximate only, is not guaranteed, does not form a part of this Contract, and Contractor may not rely thereon. By submitting its bid, Contractor acknowledges that it has made visual examination of Site and has made whatever tests Contractor deems appropriate to determine underground condition of soil. Although any such report is not a part of this Contract, recommendations from the report may be included in the Drawings, Specifications, or other Contract Documents. It is Contractor's sole responsibility to thoroughly review all Contract Documents, Drawings, and Specifications.
- **11.2.2** Contractor agrees that no claim against District will be made by Contractor for damages and hereby waives any rights to damages if, during progress of Work, Contractor encounters subsurface or latent conditions at Site materially differing from those shown on Drawings or indicated in Specifications, or for unknown conditions of an unusual nature that differ materially from those ordinarily encountered in the work of the character provided for in Plans and Specifications, except as indicated in the provisions of these General Conditions regarding trenches, trenching, and/or existing utility lines.

11.3 Access to Work

District and its representatives shall at all times have access to Work wherever it is in preparation or progress, including storage and fabrication. Contractor shall provide safe and proper facilities for such access so that District's representatives may perform their functions.

11.4 <u>Layout and Field Engineering</u>

- **11.4.1** All field engineering required for layout of this Work and establishing grades for earthwork operations shall be furnished by Contractor at its expense. This Work shall be done by a qualified, California-registered civil engineer approved in writing by District and Architect. Any required Record and/or As-Built Drawings of Site development shall be prepared by the approved civil engineer.
- **11.4.2** The Contractor shall be responsible for having ascertained pertinent local conditions such as location, accessibility, and general character of the Site and for having satisfied itself as to the conditions under which the Work is to be performed. Contractor shall follow best practices, including but not limited to potholing to avoid utilities. District shall not be liable for any claim for allowances because of Contractor's error, failure to follow best practices, or negligence in acquainting itself with the conditions at the Site.

11.4.3 Contractor shall protect and preserve established benchmarks and monuments and shall make no changes in locations without the prior written approval of District. Contractor shall replace any benchmarks or monuments that are lost or destroyed subsequent to proper notification of District and with District's approval.

11.5 Utilities

Utilities shall be provided as indicated in the Specifications.

11.6 Sanitary Facilities

Sanitary facilities shall be provided as indicated in the Specifications.

11.7 Surveys

Contractor shall provide surveys done by a California-licensed civil engineer surveyor to determine locations of construction, grading, and site work as required to perform the Work.

11.8 Regional Notification Center

The Contractor, except in an emergency, shall contact the appropriate regional notification center at least two (2) days prior to commencing any excavation if the excavation will be conducted in an area or in a private easement that is known, or reasonably should be known, to contain subsurface installations other than the underground facilities owned or operated by the District, and obtain an inquiry identification number from that notification center. No excavation shall be commenced and/or carried out by the Contractor unless an inquiry identification number has been assigned to the Contractor or any Subcontractor and the Contractor has given the District the identification number. Any damages arising from Contractor's failure to make appropriate notification shall be at the sole risk and expense of the Contractor. Any delays caused by failure to make appropriate notification shall be at the sole risk of the Contractor and shall not be considered for an extension of the Contract Time.

11.9 <u>Existing Utility Lines</u>

- **11.9.1** Pursuant to Government Code section 4215, District assumes the responsibility for removal, relocation, and protection of main or trunk utility lines and facilities located on the construction Site at the time of commencement of construction under this Contract with respect to any such utility facilities that are not identified in the Plans and Specifications. Contractor shall not be assessed for liquidated damages for delay in completion of the Project caused by failure of District or the owner of a utility to provide for removal or relocation of such utility facilities.
- **11.9.2** Locations of existing utilities provided by District shall not be considered exact, but approximate within a reasonable margin and shall not relieve Contractor of responsibilities to exercise reasonable care or costs of repair due to Contractor's failure to do so. District shall compensate Contractor for the costs of locating, repairing damage not due to the failure of Contractor to exercise reasonable care, and removing or relocating such utility facilities not indicated in the Plans and Specifications with reasonable accuracy, and for equipment necessarily idle during such work.

- 11.9.3 No provision herein shall be construed to preclude assessment against Contractor for any other delays in completion of the Work. Nothing in this Article shall be deemed to require District to indicate the presence of existing service laterals, appurtenances, or other utility lines, within the exception of main or trunk utility lines or whenever the presence of these utilities on the Site of the construction Project can be inferred from the presence of other visible facilities, such as buildings, meter junction boxes, on or adjacent to the Site of the construction.
- **11.9.4** If Contractor, while performing Work under this Contract, discovers utility facilities not identified by District in Contract Plans and Specifications, Contractor shall immediately notify the District and the utility in writing. The cost of repair for damage to above-mentioned visible facilities without prior written notification to the District shall be borne by the Contractor.

11.10 Notification

Contractor understands, acknowledges and agrees that the purpose for prompt notification to the District pursuant to these provisions is to allow the District to investigate the condition(s) so that the District shall have the opportunity to decide how the District desires to proceed as a result of the condition(s). Accordingly, failure of Contractor to promptly notify the District in writing, pursuant to these provisions, shall constitute Contractor's waiver of any claim for damages or delay incurred as a result of the condition(s).

11.11 Hazardous Materials

Contractor shall comply with all provisions and requirements of the Contract Documents related to hazardous materials including, without limitation, Hazardous Materials Procedures and Requirements.

11.12 **No Signs**

Neither the Contractor nor any other person or entity shall display any signs not required by law or the Contract Documents at the Site, fences trailers, offices, or elsewhere on the Site without specific prior written approval of the District.

12. TRENCHES

12.1 <u>Trenches Greater Than Five Feet</u>

Pursuant to Labor Code section 6705, if the Contract Price exceeds \$25,000 and involves the excavation of any trench or trenches five (5) feet or more in depth, the Contractor shall, in advance of excavation, promptly submit to the District and/or a registered civil or structural engineer employed by the District or Architect, a detailed plan, stamped by a licensed engineer retained by the Contractor, showing the design of shoring for protection from the hazard of caving ground during the excavation of such trench or trenches.

12.2 Excavation Safety

If such plan varies from the Shoring System Standards established by the Construction Safety Orders, the plan shall be prepared by a registered civil or structural engineer, but in no case shall such plan be less effective than that required by the Construction Safety

Orders. No excavation of such trench or trenches shall be commenced until said plan has been accepted by the District or by the person to whom authority to accept has been delegated by the District.

12.3 <u>No Tort Liability of District</u>

Pursuant to Labor Code section 6705, nothing in this Article shall impose tort liability upon the District or any of its employees.

12.4 No Excavation without Permits

The Contractor shall not commence any excavation Work until it has secured all necessary permits including the required CalOSHA excavation/shoring permit. Any permits shall be prominently displayed on the Site prior to the commencement of any excavation.

12.5 <u>Discovery of Hazardous Waste and/or Unusual Conditions</u>

- **12.5.1** Pursuant to Public Contract Code section 7104, if the Work involves digging trenches or other excavations that extend deeper than four feet below the Surface, the Contractor shall promptly, and before the following conditions are disturbed, notify the District, in writing, of any:
 - **12.5.1.1** Material that the Contractor believes may be material that is hazardous waste, as defined in section 25117 of the Health and Safety Code, is required to be removed to a Class I, Class II, or Class III disposal site in accordance with provisions of existing law.
 - **12.5.1.2** Subsurface or latent physical conditions at the Site differing from those indicated.
 - **12.5.1.3** Unknown physical conditions at the Site of any unusual nature, different materially from those ordinarily encountered and generally recognized as inherent in work of the character provided for in the Contract.
- **12.5.2** The District shall promptly investigate the conditions, and if it finds that the conditions do materially so differ, or do involve hazardous waste, and cause a decrease or increase in the Contractor's cost of, or the time required for, performance of any part of the Work, shall issue a Change Order under the procedures described herein.
- **12.5.3** In the event that a dispute arises between District and the Contractor whether the conditions materially differ, or involve hazardous waste, or cause a decrease or increase in the Contractor's cost of, or time required for, performance of any part of the Work, the Contractor shall not be excused from any scheduled completion date provided for by the Contract, but shall proceed with all work to be performed under the Contract. The Contractor shall retain any and all rights provided either by Contract or by law that pertain to the resolution of disputes and protests.

13. INSURANCE AND BONDS

13.1 <u>Insurance</u>

Unless different provisions and/or limits are indicated in the Special Conditions, all insurance required of Contractor and/or its Subcontractor(s) shall be at least as broad as the amounts and include the provisions set forth herein.

13.1.1 <u>Commercial General Liability and Automobile Liability Insurance</u>

- **13.1.1.1** Contractor shall procure and maintain, during the life of this Contract, Commercial General Liability Insurance and Automobile Liability Insurance that shall protect Contractor, District, State, Construction Manager(s), Project Inspector(s), and Architect(s) from all claims for bodily injury, property damage, personal injury, death, advertising injury, and medical payments arising from, or in connection with, operations under this Contract. This coverage shall be provided in a form at least as broad as Insurance Services (ISO) Form CG 0001 11188. Contractor shall ensure that Products Liability and Completed Operations coverage, Fire Damage Liability coverage, and Automobile Liability Insurance coverage including owned, non-owned, and hired automobiles, are included within the above policies and at the required limits, or Contractor shall procure and maintain these coverages separately.
- **13.1.1.2** Contractor's deductible or self-insured retention for its Commercial General Liability Insurance policy shall not exceed \$25,000 unless approved in writing by District.
- **13.1.1.3** All such policies shall be written on an occurrence form.

13.1.2 Excess Liability Insurance

- **13.1.2.1** If Contractor's underlying policy limits are less than required, subject to the District's sole discretion, Contractor may procure and maintain, during the life of this Contract, an Excess Liability Insurance Policy to meet the policy limit requirements of the required policies in order to satisfy, in the aggregate with its underlying policy, the insurance requirements herein..
- **13.1.2.2** There shall be no gap between the per occurrence amount of any underlying policy and the start of the coverage under the Excess Liability Insurance Policy. Any Excess Liability Insurance Policy shall be written on a following form and shall protect Contractor, District, State, Construction Manager(s), Project Manager(s), and Architect(s) in amounts and including the provisions as set forth in the Supplementary Conditions (if any) and/or Special Conditions, and that complies with all requirements for Commercial General Liability and Automobile Liability and Employers' Liability Insurance.
- **13.1.2.3** The District, in its sole discretion, may accept the Excess Liability Insurance Policy that brings Contractor's primary limits to the minimum requirements herein.
- **13.1.3** <u>Subcontractor(s):</u> Contractor shall require its Subcontractor(s), if any, to procure and maintain Commercial General Liability Insurance, Automobile Liability Insurance, and Excess Liability Insurance (if Subcontractor elects to satisfy, in part

the insurance required herein by procuring and maintaining an Excess Liability Insurance Policy) with forms of coverage and limits equal to the amounts required of the Contractor.

13.1.4 Workers' Compensation and Employers' Liability Insurance

- **13.1.4.1** In accordance with provisions of section 3700 of the California Labor Code, the Contractor and every Subcontractor shall be required to secure the payment of compensation to its employees.
- **13.1.4.2** Contractor shall procure and maintain, during the life of this Contract, Workers' Compensation Insurance and Employers' Liability Insurance for all of its employees engaged in work under this Contract, on/or at the Site of the Project. This coverage shall cover, at a minimum, medical and surgical treatment, disability benefits, rehabilitation therapy, and survivors' death benefits. Contractor shall require its Subcontractor(s), if any, to procure and maintain Workers' Compensation Insurance and Employers' Liability Insurance for all employees of Subcontractor(s). Any class of employee or employees not covered by a Subcontractor's insurance shall be covered by Contractor's insurance. If any class of employee or employee engaged in Work under this Contract, on or at the Site of the Project, is not protected under the Workers' Compensation Insurance, Contractor shall provide, or shall cause a Subcontractor to provide, adequate insurance coverage for the protection of any employee(s) not otherwise protected before any of those employee(s) commence work.

13.1.5 <u>Builder's Risk Insurance: Builder's Risk "All Risk" Insurance</u>

Contractor shall procure and maintain, during the life of this Contract, Builder's Risk (Course of Construction), or similar first party property coverage acceptable to the District, issued on a replacement cost value basis. The cost shall be consistent with the total replacement cost of all insurable Work of the Project included within the Contract Documents. Coverage is to insure against all risks of accidental physical loss and shall include without limitation the perils of vandalism and/or malicious mischief (both without any limitation regarding vacancy or occupancy), sprinkler leakage, civil authority, theft, sonic disturbance, earthquake, flood, collapse, wind, rain, dust, fire, war, terrorism, lightning, smoke, and rioting. Coverage shall include debris removal, demolition, increased costs due to enforcement of all applicable ordinances and/or laws in the repair and replacement of damaged and undamaged portions of the property, and reasonable costs for the Architect's and engineering services and expenses required as a result of any insured loss upon the Work and Project, including completed Work and Work in progress, to the full insurable value thereof.

13.1.6 Pollution Liability Insurance

13.1.6.1 Contractor shall procure and maintain Pollution Liability Insurance that shall protect Contractor, District, State, Construction Manager(s), Project Inspector(s), and Architect(s) from all claims for bodily injury, property damage, including natural resource damage, cleanup costs, removal, storage, disposal, and/or use of the pollutant arising from operations under this Contract, and defense, including costs and expenses incurred in the investigation, defense, or settlement of claims. Coverage shall apply to sudden and/or gradual pollution conditions resulting from the escape or release of smoke, vapors, fumes, acids,

alkalis, toxic chemicals, liquids, or gases, natural gas, waste materials, or other irritants, contaminants, or pollutants, including asbestos. This coverage shall be provided in a form at least as broad as Insurance Services Offices, Inc. (ISO) Form CG 2415, or Contractor shall procure and maintain these coverages separately.

- **13.1.6.2** Contractor warrants that any retroactive date applicable to coverage under the policy shall predate the effective date of the Contract and that continuous coverage will be maintained or an extended reporting or discovery period will be exercised for a period of three (3) years, beginning from the time that the Work under the Contract is completed.
- **13.1.6.3** If Contractor is responsible for removing any pollutants from a site, then Contractor shall ensure that Any Auto, including owned, non-owned, and hired, is included within the above policies and at the required limits, to cover its automobile exposure from transporting the pollutants from the site to an approved disposal site. This coverage shall include the Motor Carrier Act Endorsement, MCS 90.

13.1.7 <u>Proof of Insurance and Other Requirements: Endorsements and Certificates</u>

- **13.1.7.1** Contractor shall not commence Work nor shall it allow any Subcontractor to commence Work under this Contract, until Contractor and its Subcontractor(s) have procured all required insurance and Contractor has delivered in duplicate to the District complete endorsements (or entire insurance policies) and certificates indicating the required coverages have been obtained, and the District has approved these documents.
- **13.1.7.2** Endorsements, certificates, and insurance policies shall include the following:
 - **13.1.7.2.1** A clause stating the following, or other language acceptable to the District:

"This policy shall not be canceled until written notice to District, Architect, and Construction Manager stating date of the cancellation by the insurance carrier. Date of cancellation may not be less than thirty (30) days after date of mailing notice."

- **13.1.7.2.2** Language stating in particular those insured, extent of insurance, location and operation to which insurance applies, expiration date, to whom cancellation and reduction notice will be sent, and length of notice period.
- **13.1.7.2.3** All endorsements, certificates and insurance policies shall state that District, its trustees, employees and agents, the State of California, Construction Manager(s), Project Manager(s), Inspector(s) and Architect(s) are named additional insureds under all policies except Workers' Compensation Insurance and Employers' Liability Insurance.
- **13.1.7.2.4** All endorsements shall waive any right to subrogation against any of the named additional insureds.

- **13.1.7.2.5** Contractor's and Subcontractors' insurance policy(s) shall be primary and non-contributory to any insurance or self-insurance maintained by District, its trustees, employees and/or agents, the State of California, Construction Manager(s), Project Manager(s), Inspector(s), and/or Architect(s).
- **13.1.7.2.6** Contractor's insurance limit shall apply separately to each insured against whom a claim is made or suit is brought.
- **13.1.7.3** No policy shall be amended, canceled or modified, and the coverage amounts shall not be reduced, until Contractor or Contractor's broker has provided written notice to District, Architect(s), and Construction Manager(s) stating date of the amendment, modification, cancellation or reduction, and a description of the change. Date of amendment, modification, cancellation or reduction may not be less than thirty (30) days after date of mailing notice.
- **13.1.7.4** Insurance written on a "claims made" basis shall be retroactive to a date that coincides with or precedes Contractor's commencement of Work, including subsequent policies purchased as renewals or replacements. Said policy is to be renewed by the Contractor and all Subcontractors for a period of five (5) years following completion of the Work or termination of this Agreement. Such insurance must have the same coverage and limits as the policy that was in effect during the term of this Agreement, and will cover the Contractor and all Subcontractors for all claims made.
- **13.1.7.5** Unless otherwise stated in the Special Conditions, all of Contractor's insurance shall be with insurance companies with an A.M. Best rating of no less than **A: VII**.
- **13.1.7.6** The insurance requirements set forth herein shall in no way limit the Contractor's liability arising out of or relating to the performance of the Work or related activities.
- **13.1.7.7** Failure of Contractor and/or its Subcontractor(s) to comply with the insurance requirements herein shall be deemed a material breach of the Contract.

[THE REMAINDER OF THIS PAGE LEFT BLANK INTENTIONALLY]

13.1.8 Insurance Policy Limits

13.1.8.1 Unless different limits are indicated in the Special Conditions, the limits of insurance shall not be less than the following amounts:

Commercial General Liability	Product Liability and Completed Operations, Fire Damage Liability – Split Limit	\$2,000,000 per occurrence; \$4,000,000 aggregate
Automobile Liability	Any Auto – Combined Single Limit	\$1,000,000
Workers' Compensation		Statutory limits pursuant to State law
Employers' Liability		\$1,000,000
Builder's Risk (Course of Construction)		Issued for the value and scope of Work indicated herein.
Pollution Liability		\$1,000,000 per claim; \$2,000,000 aggregate

13.1.8.2 If Contractor normally carries insurance in an amount greater than the minimum amounts required by District, that greater amount shall become the minimum required amount of insurance for purposes of the Contract. Therefore, Contractor hereby acknowledges and agrees that all insurance carried by it shall be deemed liability coverage for all actions it performs in connection with the Contract.

13.2 <u>Contract Security - Bonds</u>

- **13.2.1** Contractor shall furnish two surety bonds issued by a California admitted surety insurer as follows:
 - **13.2.1.1** Performance Bond: A bond in an amount at least equal to one hundred percent (100%) of Contract Price as security for faithful performance of this Contract.
 - **13.2.1.2** Payment Bond: A bond in an amount at least equal to one hundred percent (100%) of the Contract Price as security for payment of persons performing labor and/or furnishing materials in connection with this Contract.
- **13.2.2** Cost of bonds shall be included in the Bid and Contract Price.
- **13.2.3** All bonds related to this Project shall be in the forms set forth in these Contract Documents and shall comply with all requirements of the Contract Documents, including, without limitation, the bond forms.

14. WARRANTY/GUARANTEE/INDEMNITY

14.1 Warranty/Guarantee

- **14.1.1** The Contractor shall obtain and preserve for the benefit of the District, manufacturer's warranties on materials, fixtures, and equipment incorporated into the Work.
- **14.1.2** In addition to guarantees required elsewhere, Contractor shall, and hereby does guarantee and warrant all Work furnished on the job against all defects for a period of **ONE (1)** year after the later of the following dates, unless a longer period is provided for in the Contract Documents:
 - **14.1.2.1** The acceptance by the District's governing board of the Work, subject to these General Conditions, or
 - **14.1.2.2** The date that commissioning for the Project, if any, was completed.

At the District's sole option, Contractor shall repair or replace any and all of that Work, together with any other Work that may be displaced in so doing, that may prove defective in workmanship and/or materials within a **ONE (1)** year period from date of completion as defined above, unless a longer period is provided for in the Contract Documents, without expense whatsoever to District. In the event of failure of Contractor and/or Surety to commence and pursue with diligence said replacements or repairs within ten (10) days after being notified in writing, Contractor and Surety hereby acknowledge and agree that District is authorized to proceed to have defects repaired and made good at expense of Contractor and/or Surety who hereby agree to pay costs and charges therefore immediately on demand.

- **14.1.3** If, in the opinion of District, defective work creates a dangerous condition or requires immediate correction or attention to prevent further loss to District or to prevent interruption of District operations, District will attempt to give the notice required above. If Contractor or Surety cannot be contacted or neither complies with District's request for correction within a reasonable time as determined by District, District may, notwithstanding the above provision, proceed to make any and all corrections and/or provide attentions the District believes are necessary. The costs of correction or attention shall be charged against Contractor and Surety of the guarantees provided in this Article or elsewhere in this Contract.
- **14.1.4** The above provisions do not in any way limit the guarantees on any items for which a longer guarantee is specified or on any items for which a manufacturer gives a guarantee for a longer period. Contractor shall furnish to District all appropriate guarantee or warranty certificates as indicated in the Specifications or upon request by District.
- **14.1.5** Nothing herein shall limit any other rights or remedies available to District.

14.2 Indemnity and Defense

14.2.1 To the furthest extent permitted by California law, the Contractor shall indemnify, keep and hold harmless the District, the Architect(s), and the Construction Manager(s), their respective consultants, separate contractors, board

members, officers, representatives, agents, and employees, in both individual and official capacities ("Indemnitees"), against all suits, claims, injury, damages, losses, and expenses ("Claims"), including but not limited to attorney's fees, caused by, arising out of, resulting from, or incidental to, in whole or in part, the performance of the Work under this Contract by the Contractor, its Subcontractors, vendors, or suppliers. However, the Contractor's indemnification and hold harmless obligation shall be reduced by the proportion of the Indemnitees' and/or Architect's liability to the extent the Claim(s) is/are caused by the sole negligence, active negligence, or willful misconduct of the Indemnitees, and/or defects in design furnished by the Architect, as found by a court or arbitrator of competent jurisdiction. This indemnification and hold harmless obligation of the Contractor shall not be construed to negate, abridge, or otherwise reduce any right or obligation of indemnity that would otherwise exist or arise as to any Indemnitee or other person described herein. This indemnification and hold harmless obligation includes, but is not limited to, any failure or alleged failure by Contractor to comply with any provision of law, any failure or alleged failure to timely and properly fulfill all of its obligations under the Contract Documents in strict accordance with their terms, and without limitation, any failure or alleged failure of Contractor's obligations regarding any stop payment notice actions or liens, including Civil Wage and Penalty Assessments and/or Orders by the DIR.

- 14.2.2 To the furthest extent permitted by California law, Contractor shall also defend Indemnitees, at its own expense, including but not limited to attorneys' fees and costs, against all Claims caused by, arising out of, resulting from, or incidental to, in whole or in part, the performance of the Work under this Contract by the Contractor, its Subcontractors, vendors, or suppliers. However, without impacting Contractor's obligation to provide an immediate and ongoing defense of Indemnitees, the Contractor's defense obligation shall be retroactively reduced by the proportion of the Indemnitees' and/or Architect's liability to the extent caused by the sole negligence, active negligence, or willful misconduct of the Indemnitees, and/or defects in design furnished by the Architect, as found by a court or arbitrator of competent jurisdiction. The District shall have the right to accept or reject any legal representation that Contractor proposes to defend the Indemnitees. If any Indemnitee provides its own defense due to failure to timely respond to tender of defense, rejection of tender of defense, or conflict of interest of proposed counsel, Contractor shall reimburse such Indemnitee for any expenditures. Contractor's defense obligation shall not be construed to negate, abridge, or otherwise reduce any right or obligation of defense that would otherwise exist as to any Indemnitee or other person described herein. Contractor's defense obligation includes, but is not limited to, any failure or alleged failure by Contractor to comply with any provision of law, any failure or alleged failure to timely and properly fulfill all of its obligations under the Contract Documents in strict accordance with their terms, and without limitation, any failure or alleged failure of Contractor's obligations regarding any stop payment notice actions or liens, including Civil Wage and Penalty Assessments and/or Orders by the DIR. The Contractor shall give prompt notice to the District in the event of any Claim(s).
- **14.2.3** Without limitation of the provisions herein, if the Contractor's obligation to indemnify and hold harmless the Indemnitees or its obligation to defend Indemnitees as provided herein shall be determined to be void or unenforceable, in whole or in part, it is the intention of the parties that these circumstances shall not otherwise affect the validity or enforceability of the Contractor's agreement to indemnify, defend, and hold harmless the rest of the Indemnitees, as provided herein. Further,

the Contractor shall be and remain fully liable on its agreements and obligations herein to the fullest extent permitted by law.

- **14.2.4** Pursuant to Public Contract Code section 9201, the District shall provide timely notification to Contractor of the receipt of any third-party Claim relating to this Contract. The District shall be entitled to recover its reasonable costs incurred in providing said notification.
- **14.2.5** In any and all Claims against any of the Indemnitees by any employee of the Contractor, any Subcontractor, anyone directly or indirectly employed by any of them or anyone for whose acts any of them may be liable, the Contractor's indemnification obligation herein shall not be limited in any way by any limitation on the amount or type of damages, compensation, or benefits payable by or for the Contractor or any Subcontractor under workers' compensation acts, disability benefit acts, or other employee benefit acts.
- **14.2.6** The District may retain so much of the moneys due the Contractor as shall be considered necessary, until disposition of any such Claims or until the District, Architect(s) and Construction Manager(s) have received written agreement from the Contractor that they will unconditionally defend the District, Architect(s) and Construction Manager(s), their respective officers, agents and employees, and pay any damages due by reason of settlement or judgment.
- **14.2.7** The Contractor's defense and indemnification obligations hereunder shall survive the completion of Work, the warranty/guarantee period, and the termination of the Contract.

15. TIME

15.1 Notice to Proceed

- **15.1.1** District may issue a Notice to Proceed within ninety (90) days from the date of the Notice of Award. Once Contractor has received the Notice to Proceed, Contractor shall complete the Work within the period of time indicated in the Contract Documents.
- **15.1.2** In the event that the District desires to postpone issuing the Notice to Proceed beyond ninety (90) days from the date of the Notice of Award, it is expressly understood that with reasonable notice to the Contractor, the District may postpone issuing the Notice to Proceed. It is further expressly understood by Contractor that Contractor shall not be entitled to any claim of additional compensation as a result of the postponement of the issuance of the Notice to Proceed.
- **15.1.3** If the Contractor believes that a postponement of issuance of the Notice to Proceed will cause a hardship to Contractor, Contractor may terminate the Contract. Contractor's termination due to a postponement shall be by written notice to District within ten (10) days after receipt by Contractor of District's notice of postponement. It is further understood by Contractor that in the event that Contractor terminates the Contract as a result of postponement by the District, the District shall only be obligated to pay Contractor for the Work that Contractor had performed at the time of notification of postponement. Should Contractor terminate the Contract as a result of a notice of postponement, District shall have the authority to award the Contract to the next lowest responsive responsible bidder.

15.2 <u>Computation of Time / Adverse Weather</u>

- **15.2.1** The Contractor will only be allowed a time extension for Adverse Weather conditions if requested by Contractor in compliance with the time extension request procedures and only if all of the following conditions are met:
 - **15.2.1.1** The weather conditions constitute Adverse Weather, as defined herein;
 - **15.2.1.2** Contractor can verify that the Adverse Weather caused delays in excess of five (5) hours of the indicated labor required to complete the scheduled tasks of Work on the day affected by the Adverse Weather;
 - **15.2.1.3** The Contractor's crew is dismissed as a result of the Adverse Weather;
 - **15.2.1.4** Said delay adversely affects the critical path in the Construction Schedule; and
 - **15.2.1.5** Exceeds twelve (12) days of delay per year.
- **15.2.2** If the aforementioned conditions are met, a non-compensable day-for-day extension will only be allowed for those days in excess of those indicated herein.
- **15.2.3** The Contractor shall work seven (7) days per week, if necessary, irrespective of inclement weather, to maintain access and the Construction Schedule, and to protect the Work under construction from the effects of Adverse Weather, all at no further cost to the District.
- **15.2.4** The Contract Time has been determined with consideration given to the average climate weather conditions prevailing in the County in which the Project is located.

15.3 Hours of Work

15.3.1 Sufficient Forces

Contractor and Subcontractors shall continuously furnish sufficient and competent work forces with the required levels of familiarity with the Project and skill, training and experience to ensure the prosecution of the Work in accordance with the Construction Schedule.

15.3.2 Performance During Working Hours

Work shall be performed during regular working hours as permitted by the appropriate governmental agency except that in the event of an emergency, or when required to complete the Work in accordance with job progress, Work may be performed outside of regular working hours with the advance written consent of the District and approval of any required governmental agencies.

15.3.3 No Work during State Testing

Contractor shall, at no additional cost to the District and at the District's request, coordinate its Work to not disturb District students including, without limitation, not performing any Work when students at the Site are taking State or Federally-

required tests. The District or District's Representative will provide Contractor with a schedule of test dates concurrent with the District's issuance of the Notice to Proceed, or as soon as test dates are made available to the District.

15.4 **Progress and Completion**

15.4.1 Time of the Essence

Time limits stated in the Contract Documents are of the essence to the Contract. By executing the Agreement, the Contractor confirms that the Contract Time is a reasonable period for performing the Work.

15.4.2 No Commencement Without Insurance or Bonds

The Contractor shall not commence operations on the Project or elsewhere prior to the effective date of insurance and bonds. The date of commencement of the Work shall not be changed by the effective date of such insurance or bonds. If Contractor commences Work without insurance and bonds, all Work is performed at Contractor's peril and shall not be compensable until and unless Contractor secures bonds and insurance pursuant to the terms of the Contract Documents and subject to District claim for damages.

15.5 <u>Schedule</u>

Contractor shall provide to District, Construction Manager, and Architect a schedule in conformance with the Contract Documents and as required in the Notice to Proceed and the Contractor's Submittals and Schedules section of these General Conditions.

15.6 <u>Expeditious Completion</u>

The Contractor shall proceed expeditiously with adequate forces and shall achieve Completion within the Contract Time.

16. EXTENSIONS OF TIME - LIQUIDATED DAMAGES

16.1 Liquidated Damages

Contractor and District hereby agree that the exact amount of damages for failure to complete the Work within the time specified is extremely difficult or impossible to determine. If the Work is not completed within the time specified in the Contract Documents, it is understood that the District will suffer damage. It being impractical and unfeasible to determine the amount of actual damage, it is agreed the Contractor shall pay to District as fixed and liquidated damages, and not as a penalty, the amount set forth in the Agreement for each calendar day of delay in completion. Contractor and its Surety shall be liable for the amount thereof pursuant to Government Code section 53069.85.

16.2 Excusable Delay

16.2.1 Contractor shall not be charged for liquidated damages because of any delays in completion of the Work which are not the fault of Contractor or its Subcontractors, including acts of God as defined in Public Contract Code section 7105, acts of enemy, epidemics, and quarantine restrictions. Contractor shall, within

- five (5) calendar days of beginning of any delay, notify District in writing of causes of delay including documentation and facts explaining the delay and the direct correlation between the cause and effect. District shall review the facts and extent of any delay and shall grant extension(s) of time for completing Work when, in its judgment, the findings of fact justify an extension. Extension(s) of time shall apply only to that portion of Work affected by delay, and shall not apply to other portions of Work not so affected. An extension of time may only be granted if Contractor has timely submitted the Construction Schedule as required herein.
- **16.2.2** Contractor shall notify the District pursuant to the claims provisions in these General Conditions of any anticipated delay and its cause. Following submission of a claim, the District may determine whether the delay is to be considered avoidable or unavoidable, how long it continues, and to what extent the prosecution and completion of the Work might be delayed thereby.
- **16.2.3** In the event the Contractor requests an extension of Contract Time for unavoidable delay, such request shall be submitted in accordance with the provisions in the Contract Documents governing changes in Work. When requesting time, requests must be submitted with full justification and documentation. If the Contractor fails to submit justification, it waives its right to a time extension at a later date. Such justification must be based on the official Construction Schedule as updated at the time of occurrence of the delay or execution of Work related to any changes to the Scope of Work. Any claim for delay must include the following information as support, without limitation:
 - **16.2.3.1** The duration of the activity relating to the changes in the Work and the resources (manpower, equipment, material, etc.) required to perform the activities within the stated duration.
 - **16.2.3.2** Specific logical ties to the Contract Schedule for the proposed changes and/or delay showing the activity/activities in the Construction Schedule that are affected by the change and/or delay. In particular, Contractor must show an actual impact to the schedule, after making a good faith effort to mitigate the delay by rescheduling the work, by providing an analysis of the schedule ("Time Impact Analysis"). Such Time Impact Analysis shall describe in detail the cause and effect of the delay and the impact on the critical dates in the Project schedule. (A portion of any delay of seven (7) days or more must be provided.)
 - **16.2.3.3** A recovery schedule must be submitted within twenty (20) calendar days of written notification to the District of causes of delay.

16.3 No Additional Compensation for Delays Within Contractor's Control

16.3.1 Contractor is aware that governmental agencies, including, without limitation, the Division of the State Architect, the Department of General Services, gas companies, electrical utility companies, water districts, and other agencies may have to approve Contractor-prepared drawings or approve a proposed installation. Accordingly, Contractor shall include in its bid, time for possible review of its drawings and for reasonable delays and damages that may be caused by such agencies. Thus, Contractor is not entitled to make a claim for damages or delays arising from the review of Contractor's drawings.

- **16.3.2** Contractor shall only be entitled to compensation for delay when all of the following conditions are met:
 - **16.3.2.1** The District is responsible for the delay;
 - **16.3.2.2** The delay is unreasonable under the circumstances involved;
 - **16.3.2.3** The delay was not within the contemplation of the District and Contractor;
 - **16.3.2.4** The delay could not have been avoided or mitigated by Contractor's reasonable diligence; and
 - **16.3.2.5** Contractor timely complies with the claims procedure of the Contract Documents.
- **16.3.3** Where a change in the Work extends the Contract Time, Contractor may request and recover additional, actual direct costs, provided that Contractor can demonstrate such additional costs are:
 - **16.3.3.1** Actually incurred performing the Work;
 - **16.3.3.2** Not compensated by the Markup allowed; and
 - **16.3.3.3** Directly result from the extended Contract Time.

Contractor shall comply with all required procedures, documentation and time requirements in the Contract Documents. Contractor may not seek or recover such costs using formulas (e.g. Eichleay, labor factors).

16.4 Float or Slack in the Schedule

Float or slack is the amount of time between the early start date and the late start date, or the early finish date and the late finish date, of any of the activities in the schedule. Float or slack is not for the exclusive use of or benefit of either the District or the Contractor, but its use shall be determined solely by the District.

17. CHANGES IN THE WORK

17.1 No Changes Without Authorization

17.1.1 There shall be no change whatsoever in the Drawings, Specifications, or in the Work without an executed Change Order or a written Construction Change Directive authorized by the District as herein provided. District shall not be liable for the cost of any extra work or any substitutions, changes, additions, omissions, or deviations from the Drawings and Specifications unless the District's governing board has authorized the same and the cost thereof has been approved in writing by Change Order or Construction Change Directive in advance of the changed Work being performed. No extension of time for performance of the Work shall be allowed hereunder unless claim for such extension is made at the time changes in the Work are ordered, and such time duly adjusted and approved in writing in the Change Order or Construction Change Directive. Contractor shall be responsible for any costs incurred by the District for professional services and DSA fees and/or delay to

the Project Schedule, if any, for DSA to review any request for changes to the DSA approved plans and specifications for the convenience of the Contractor and/or to accommodate the Contractor's means and methods. The provisions of the Contract Documents shall apply to all such changes, additions, and omissions with the same effect as if originally embodied in the Drawings and Specifications.

- **17.1.2** Contractor shall perform immediately all work that has been authorized by a fully executed Change Order or Construction Change Directive. Contractor shall be fully responsible for any and all delays and/or expenses caused by Contractor's failure to expeditiously perform this Work.
- **17.1.3** Should any Change Order result in an increase in the Contract Price or extend the Contract Time, the cost of or length of extension in that Change Order shall be agreed to, in writing, by the District in advance of the Work by Contractor, and shall be subject to the monetary limitations set forth in Public Contract Code section 20118.4. In the event that Contractor proceeds with any change in Work without a Change Order executed by the District or Construction Change Directive, Contractor waives any claim of additional compensation or time for that additional work. Under no circumstances shall Contractor be entitled to any claim of additional compensation or time not expressly requested by Contractor in a Proposed Change Order or approved by District in an executed Change Order.
- **17.1.4** A Change Order or Construction Change Directive will become effective when approved by the Board, notwithstanding that Contractor has not signed it. A Change Order or Construction Change Directive will become effective without Contractor's signature provided District indicates it as a "Unilateral Change Order". Any dispute as to the adjustment in the Contract Price or Contract Time, if any, of the Unilateral Change Order shall be resolved pursuant to the Payment and Claims and Disputes provisions herein.
- **17.1.5** Contractor understands, acknowledges, and agrees that the reason for District authorization is so that District may have an opportunity to analyze the Work and decide whether the District shall proceed with the Change Order or alter the Project so that a change in Work becomes unnecessary.

17.2 **Architect Authority**

The Architect will have authority to order minor changes in the Work not involving any adjustment in the Contract Price, or an extension of the Contract Time, or a change that is inconsistent with the intent of the Contract Documents. These changes shall be effected by written Change Order, Construction Change Directive, by Architect's response(s) to RFI(s), or by Architect's Supplemental Instructions ("ASI").

17.3 Change Orders

- **17.3.1** A Change Order is a written instrument prepared and issued by the District and/or the Architect and signed by the District (as authorized by the District's Governing Board), the Contractor, the Architect, and approved by the Project Inspector (if necessary) and DSA (if necessary), stating their agreement regarding all of the following:
 - **17.3.1.1** A description of a change in the Work;

- 17.3.1.2 The amount of the adjustment in the Contract Price, if any; and
- **17.3.1.3** The extent of the adjustment in the Contract Time, if any.

17.4 Construction Change Directives

- 17.4.1 A Construction Change Directive is a written order prepared and issued by the District, the Construction Manager, and/or the Architect and signed by the District and the Architect, directing a change in the Work. The District may, as provided by law, by Construction Change Directive and without invalidating the Contract, order changes in the Work consisting of additions, deletions, or other revisions. The adjustment to the Contract Price or Time, if any, is subject to the provisions of this section regarding Changes in the Work. If all or a portion of the Project is being funded by funds requiring approval by the State Allocation Board ("SAB"), these revisions may be subject to compensation once approval of same is received and funded by the SAB, and funds are released by the Office of Public School Construction ("OPSC"). Any dispute as to the adjustment in the Contract Price, if any, of the Construction Change Directive or timing of payment shall be resolved pursuant to the Payment and Claims and Disputes provisions herein.
- **17.4.2** The District may issue a Construction Change Directive in the absence of agreement on the terms of a Change Order.

17.5 Force Account Directives

- **17.5.1** When work, for which a definite price has not been agreed upon in advance, is to be paid for on a force account basis, all direct costs necessarily incurred and paid by the Contractor for labor, material, and equipment used in the performance of that Work, shall be subject to the approval of the District and compensation will be determined as set forth herein.
- **17.5.2** The District will issue a Force Account Directive to proceed with the Work on a force account basis, and a not-to-exceed budget will be established by the District.
- **17.5.3** All requirements regarding direct cost for labor, labor burden, material, equipment, and markups on direct costs for overhead and profit described in this section shall apply to Force Account Directives. However, the District will only pay for actual costs verified in the field by the District or its authorized representative(s) on a daily basis.
- **17.5.4** The Contractor shall be responsible for all cost related to the administration of Force Account Directive. The markup for overhead and profit for Contractor modifications shall be full compensation to the Contractor to administer Force Account Directive, and Contractor shall not be entitled to separately recover additional amounts for overhead and/or profit.
- **17.5.5** The Contractor shall notify the District or its authorized representative(s) at least twenty-four (24) hours prior to proceeding with any of the force account work. Furthermore, the Contractor shall notify the District when it has consumed eighty percent (80%) of the budget, and shall not exceed the budget unless specifically authorized in writing by the District. The Contractor will not be compensated for force account work in the event that the Contractor fails to timely

notify the District regarding the commencement of force account work, or exceeding the force account budget.

- 17.5.6 The Contractor shall diligently proceed with the work, and on a daily basis, submit a daily force account report using Document 00 63 47, "Daily Force Account Report," no later than 5:00 p.m. each day. The report shall contain a detailed itemization of the daily labor, material, and equipment used on the force account work only. The names of the individuals performing the force account work shall be included on the daily force account reports. The type and model of equipment shall be identified and listed. The District will review the information contained in the reports, and sign the reports no later than the next work day, and return a copy of the report to the Contractor for their records. The District will not sign, nor will the Contractor receive compensation for work the District cannot verify. The Contractor will provide a weekly force account summary indicating the status of each Force Account Directive in terms of percent complete of the not-to-exceed budget and the estimated percent complete of the work.
- **17.5.7** In the event the Contractor and the District reach a written agreement on a set cost for the work while the work is proceeding based on a Force Account Directive, the Contractor's signed daily force account reports shall be discontinued and all previously signed reports shall be invalid.

17.6 Price Request

17.6.1 <u>Definition of Price Request</u>

A Price Request is a written request prepared by the Architect requesting the Contractor to submit to the District and the Architect an estimate of the effect of a proposed change in the Work on the Contract Price and the Contract Time.

17.6.2 Scope of Price Request

A Price Request shall contain adequate information, including any necessary Drawings and Specifications, to enable Contractor to provide the cost breakdowns required herein. The Contractor shall not be entitled to any additional compensation for preparing a response to a Price Request, whether ultimately accepted or not.

17.7 <u>Proposed Change Order</u>

17.7.1 Definition of Proposed Change Order

A Proposed Change Order ("PCO") is a written request prepared by the Contractor requesting that the District and the Architect issue a Change Order based upon a proposed change to the Work.

17.7.2 Changes in Contract Price

A PCO shall include breakdowns and backup documentation pursuant to the revisions herein and sufficient, in the District's judgment, to validate any change in Contract Price. In no case shall Contractor or any of its Subcontractors be permitted to reserve rights for additional compensation for Change Order Work.

17.7.3 Changes in Time

A PCO shall also include any changes in time required to complete the Project. Any additional time requested shall not be the number of days to make the proposed change, but must be based upon the impact to the Construction Schedule as defined in the Contract Documents. The Contractor shall justify the proposed change in time by submittal of a schedule analysis that accurately shows the impact of the change on the critical path of the Construction Schedule ("Time Impact Analysis"). If Contractor fails to request a time extension in a PCO, including the Time Impact Analysis, then the Contractor is thereafter precluded from requesting, and waives any right to request, additional time and/or claim a delay. In no case shall Contractor or any of its Subcontractors be permitted to reserve rights for additional time for Change Order Work. A PCO that leaves the amount of time requested blank, or states that such time requested is "to be determined", is not permitted and shall also constitute a waiver of any right to request additional time and/or claim a delay.

17.7.4 Unknown and/or Unforeseen Conditions

If there is an Allowance, then Contractor must submit a Request for Allowance Expenditure Directive, including supporting documentation as described below, to receive authorization for the release of funds from the Allowance. Allowance Expenditure Directives shall be based on Contractor's costs, without overhead and profit, for products, delivery, installation, labor, insurance, payroll, taxes, bonding and equipment rental will be included in Allowance Expenditure Directive authorizing expenditure of funds from this Allowance. No overhead and profit shall be added to the Allowance Expenditure Directive. If cost of the unforeseen condition(s) exceed the Allowance, Contractor must submit a PCO for amounts in excess of the Allowance requesting an increase in Contract Price and/or Contract Time that is based at least partially on Contractor's assertion that Contractor has encountered unknown and/or unforeseen condition(s) on the Project, then Contractor shall base the PCO on provable information that, beyond a reasonable doubt and to the District's satisfaction, demonstrates that the unknown and/or unforeseen condition(s) were actually unknown and/or unforeseen and that the condition(s) were reasonably unknown and/or unforeseen. If not, the District shall deny the PCO as unsubstantiated, and the Contractor shall complete the Project without any increase in Contract Price and/or Contract Time based on that PCO.

17.7.5 <u>Time to Submit Proposed Change Order</u>

Contractor shall submit its PCO within five (5) working days of the date Contractor discovers, or reasonably should have discovered, the circumstances giving rise to the PCO, unless additional time to submit a PCO is granted in writing by the District. Time is of the essence in Contractor's submission of PCOs so that the District can promptly investigate the basis for the PCO. Accordingly, if Contractor fails to submit its PCO within this timeframe, Contractor waives, releases, and discharges any right to assert or claim any entitlement to an adjustment of the Contract Price and/or Time based on circumstances giving rise to the PCO.

17.7.6 Proposed Change Order Certification

In submitting a PCO, Contractor certifies and affirms that the cost and/or time request is submitted in good faith, that the cost and/or time request is accurate and in accordance with the provisions of the Contract Documents, and the Contractor

submits the cost and/or request for extension of time recognizing the significant civil penalties and treble damages which follow from making a false claim or presenting a false claim under Government Code section 12650 et seq.

It is expressly understood that the value of the extra Work or changes expressly includes any and all of the Contractor's costs and expenses, direct and indirect, resulting from additional time required on the Project or resulting from delay to the Project including, without limitation, cumulative impacts. Contractor is not entitled to separately recover amounts for overhead or other indirect costs. Any costs, expenses, damages, or time extensions not included are deemed waived.

[THE REMAINDER OF THIS PAGE LEFT BLANK INTENTIONALLY]

17.8 Format for Proposed Change Order

17.8.1 The following format shall be used as applicable by the District and the Contractor (e.g. Change Orders, PCO's) to communicate proposed additions and deductions to the Contract, supported by attached documentation. Any spaces left blank will be deemed no change to cost or time.

	WORK PERFORMED OTHER THAN BY CONTRACTOR	ADD	DEDUCT
(a)	Material (attach suppliers' invoice or itemized quantity		
	and unit cost plus sales tax)		
(b)	Add Labor (attach itemized hours and rates, fully		
	Burdened, and specify the hourly rate for each additional		
	labor burden, for example, payroll taxes, fringe benefits,		
	etc.)		
(c)	Add Equipment (attach suppliers' invoice)		
(d)	Subtotal		
(e)	Add Overhead and Profit for any and all tiers of		
	Subcontractor , the total not to exceed ten percent		
	(10%) of Item (d)		
(f)	<u>Subtotal</u>		
(g)	Add General Conditions Cost (if Time is Compensable)		
	(attach supporting documentation)		
(h)	<u>Subtotal</u>		
(i)	Add Overhead and Profit for Contractor, not to		
	exceed five percent (5%) of Item (h)		
(j)	<u>Subtotal</u>		
(k)	Add Bond and Insurance, not to exceed two percent		
, ,	(2%) of Item (j)		
(I)	TOTAL		
(m)	<u>Time</u> (zero unless indicated; "TBD" not permitted)	Calendar Days	

	WORK PERFORMED BY CONTRACTOR	ADD	DEDUCT
(n)	<u>Material</u> (attach itemized quantity and unit cost plus sales tax)		
(0)	<u>Add Labor</u> (attach itemized hours and rates, fully Burdened, and specify the hourly rate for each additional labor burden, for example, payroll taxes, fringe benefits, etc.)		
(p)	Add Equipment (attach suppliers' invoice)		
(q)	Add General Conditions Cost (if Time is Compensable) (attach supporting documentation)		
(r)	<u>Subtotal</u>		
(s)	Add Overhead and Profit for Contractor , not to exceed fifteen percent (15%) of Item (e)		
(t)	Subtotal		
(u)	Add Bond and Insurance, not to exceed two percent (2%) of Item (g)		
(v)	TOTAL		
		_	
(w)	Time (zero unless indicated; "TBD" not permitted)	Calendar Days	

- 17.8.2 **Labor**. Contractor shall be compensated for the costs of labor actually and directly utilized in the performance of the Work. Such labor costs shall be the actual cost, use of any formulas (e.g. labor factors) is not allowed, not to exceed prevailing wage rates in the locality of the Site and shall be in the labor classification(s) necessary for the performance of the Work, fully Burdened. Labor costs shall exclude costs incurred by the Contractor in preparing estimate(s) of the costs of the change in the Work, in the maintenance of records relating to the costs of the change in the Work, coordination and assembly of materials and information relating to the change in the Work or performance thereof, or the supervision and other overhead and general conditions costs associated with the change in the Work or performance thereof, including but not limited to the cost for the job superintendent. If applicable, District will pay Contractor the reasonable costs for room and board, supported with appropriate backup documentation, without markup for profit or overhead as provided by U.S. General Services Administration per diem rates for California lodging, meals and incidentals, https://www.gsa.gov/travel/planbook/per-diem-rates/per-diem-rates-lookup.
- 17.8.3 **Materials**. Contractor shall be compensated for the costs of materials necessarily and actually used or consumed in connection with the performance of the change in the Work. Costs of materials may include reasonable costs of transportation from a source closest to the Site of the Work and delivery to the Site. If discounts by material suppliers are available for materials necessarily used in the performance of the change in the Work, they shall be credited to the District. If materials necessarily used in the performance of the change in the Work are obtained from a supplier or source owned in whole or in part by the Contractor, compensation therefor shall not exceed the current wholesale price for such materials. If, in the reasonable opinion of the District, the costs asserted by the Contractor for materials in connection with any change in the Work are excessive, or if the Contractor fails to provide satisfactory evidence of the actual costs of such materials from its supplier or vendor of the same, the costs of such materials and the District's obligation to pay for the same shall be limited to the then lowest wholesale price at which similar materials are available in the quantities required to perform the change in the Work. The District may elect to furnish materials for the change in the Work, in which event the Contractor shall not be compensated for the costs of furnishing such materials or any mark-up thereon.
- **Equipment**. As a precondition to the District's duty to pay for Equipment 17.8.4 rental or loading and transportation, Contractor shall provide satisfactory evidence of the actual costs of Equipment from the supplier, vendor or rental agency of same. Contractor shall be compensated for the actual cost of the necessary and direct use of Equipment in the performance of the change in the Work. Use of such Equipment in the performance of the change in the Work shall be compensated in increments of fifteen (15) minutes. Rental time for Equipment moved by its own power shall include time required to move such Equipment to the site of the Work from the nearest available rental source of the same. If Equipment is not moved to the Site by its own power, Contractor will be compensated for the loading and transportation costs in lieu of rental time. The foregoing notwithstanding, neither moving time or loading and transportation time shall be allowed if the Equipment is used for performance of any portion of the Work other than the change in the Work. Unless prior approval in writing is obtained by the Contractor from the Architect, the Project Inspector and the District, no costs or compensation shall be allowed for time while Construction Equipment is inoperative, idle or on standby, for any reason. Contractor shall not be entitled to an allowance or any other compensation for

Equipment or tools used in the performance of change in the Work where such Equipment or tools have a replacement value of \$500.00 or less. Equipment costs claimed by the Contractor in connection with the performance of any Work shall not exceed rental rates established by distributors or construction equipment rental agencies in the locality of the Site; any costs asserted which exceed such rental rates shall not be allowed or paid. Unless otherwise specifically approved in writing by the Architect, the Project Inspector and the District, the allowable rate for the use of Equipment in connection with the Work shall constitute full compensation to the Contractor for the cost of rental, fuel, power, oil, lubrication, supplies, necessary attachments, repairs or maintenance of any kind, depreciation, storage, insurance, labor (exclusive of labor costs of the Equipment operator), and any and all other costs incurred by the Contractor incidental to the use of such Equipment.

- 17.8.5 General Conditions Cost. The phrase "General Conditions Cost" shall mean, other than expressly limited or excluded herein, the costs of Contractor during the construction phase, including but not limited to: payroll costs for project manager for Work conducted at the Site, payroll costs for the superintendent and full-time general foremen, workers not included as direct labor costs engaged in support functions (e.g., loading/unloading, clean-up), costs of offices and temporary facilities including office materials, office supplies, office equipment, minor expenses, utilities, fuel, sanitary facilities and telephone services at the Site, costs of consultants not in the direct employ of Contractor or Subcontractors, and fees for permits and licenses.
- **17.8.6 Overhead and Profit**. The phrase "Overhead and Profit" shall include field and office supervisors and assistants, watchperson, use of small tools, consumable, insurance other than construction bonds and insurance required herein, general conditions costs and home office expenses.

17.9 Change Order Certification

- **17.9.1** All Change Orders and PCOs include the following certification by the Contractor, either in the form specifically or incorporated by this reference:
 - **17.9.1.1** The undersigned Contractor approves the foregoing as to the changes, if any, to the Contract Price specified for each item, and as to the extension of time allowed, if any, for completion of the entire Work as stated herein, and agrees to furnish all labor, materials, and service, and perform all work necessary to complete any additional work specified for the consideration stated herein. Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act set forth under Government Code section 12650 et seq. It is understood that the changes herein to the Contract shall only be effective when approved by the governing board of the District.
 - **17.9.1.2** It is expressly understood that the value of the extra Work or changes expressly includes any and all of the Contractor's costs and expenses, direct and indirect, resulting from additional time required on the Project or resulting from delay to the Project including, without limitation, cumulative impacts. Contractor is not entitled to separately recover amounts for overhead or other indirect costs. Any costs, expenses, damages, or time extensions not included are deemed waived.

17.9.2 Accord and Satisfaction: Contractor's execution of any Change Order shall constitute a full accord and satisfaction, and release, of all Contractor (and if applicable, Subcontractor) claims for additional time, money or other relief arising from or relating to the subject matter of the change including, without limitation, impacts of all types, cumulative impacts, inefficiency, overtime, delay and any other type of claim.

17.10 <u>Determination of Change Order Cost</u>

- **17.10.1** The amount of the increase or decrease in the Contract Price from a Change Order, if any, shall be determined in one or more of the following ways as applicable to a specific situation and at the District's discretion:
 - **17.10.1.1** District acceptance of a PCO;
 - **17.10.1.2** By unit prices contained in Contractor's original bid;
 - **17.10.1.3** By agreement between District and Contractor.

17.11 Deductive Change Orders

All deductive Change Order(s) must be prepared pursuant to the provisions herein. Where a portion of the Work is deleted from the Contract, the reasonable value of the deducted work less the value of work performed shall be considered the appropriate deduction. The value submitted on the Schedule of Values shall be used to calculate the credit amount unless the bid documentation is being held in escrow as part of the Contract Documents. Unit Prices, if any, may be used in District's discretion in calculating reasonable value. If Contractor offers a proposed amount for a deductive Change Order(s), Contractor shall include a minimum of five percent (5%) total profit and overhead to be deducted with the amount of the work of the Change Order(s). If Subcontractor work is involved, Subcontractors shall also include a minimum of five percent (5%) profit and overhead to be deducted with the amount of its deducted work. Any deviation from this provision shall not be allowed.

17.12 Addition or Deletion of Alternate Bid Item(s)

If the Bid Form and Proposal includes proposal(s) for Alternate Bid Item(s), during Contractor's performance of the Work, the District may elect to add or delete any such Alternate Bid Item(s) if not included in the Contract at the time of award. If the District elects to add or delete Alternate Bid Item(s) after Contract award, the cost or credit for such Alternate Bid Item(s) shall be as set forth in the Bid Form and Proposal unless the parties agree to a different price and the Contract Time shall be adjusted by the number of days allocated in the Contract Documents. If days are not allocated in the Contract Documents, the Contract Time shall be equitably adjusted.

17.13 <u>Discounts, Rebates, and Refunds</u>

For purposes of determining the cost, if any, of any change, addition, or omission to the Work hereunder, all trade discounts, rebates, refunds, and all returns from the sale of surplus materials and equipment shall accrue and be credited to the Contractor, and the Contractor shall make provisions so that such discounts, rebates, refunds, and returns may be secured, and the amount thereof shall be allowed as a reduction of the

Contractor's cost in determining the actual cost of construction for purposes of any change, addition, or omission in the Work as provided herein.

17.14 <u>Accounting Records</u>

With respect to portions of the Work performed by Change Orders and Construction Change Directives, the Contractor shall keep and maintain cost-accounting records satisfactory to the District, including, without limitation, Job Cost Reports as provided in these General Conditions, which shall be available to the District on the same terms as any other books and records the Contractor is required to maintain under the Contract Documents. Such records shall include without limitation hourly records for Labor and Equipment and itemized records of materials and Equipment used that day in connection with the performance of any Work. All records maintained hereunder shall be subject to inspection, review and/or reproduction by the District, the Architect or the Project Inspector upon request. In the event that the Contractor fails or refuses, for any reason, to maintain or make available for inspection, review and/or reproduction such records, the District's reasonable good faith determination of the extent of adjustment to the Contract Price shall be final, conclusive, dispositive and binding upon Contractor.

17.15 <u>Notice Required</u>

If the Contractor desires to make a claim for an increase in the Contract Price, or any extension in the Contract Time for completion, it shall notify the District pursuant to the provisions herein, including the Article on Claims and Disputes. No claim shall be considered unless made in accordance with this subparagraph. Contractor shall proceed to execute the Work even though the adjustment may not have been agreed upon. Any change in the Contract Price or extension of the Contract Time resulting from such claim shall be authorized by a Change Order.

17.16 Applicability to Subcontractors

Any requirements under this Article shall be equally applicable to Change Orders or Construction Change Directives issued to Subcontractors by the Contractor to the extent as required by the Contract Documents.

17.17 Alteration to Change Order Language

Contractor shall not alter Change Orders or reserve time in Change Orders. Change Orders altered in violation of this provision, if in conflict with the terms set forth herein, shall be construed in accordance with the terms set forth herein. Contractor shall execute finalized Change Orders and proceed under the provisions herein with proper notice.

17.18 Failure of Contractor to Execute Change Order

Contractor shall be in default of the Contract if Contractor fails to execute a Change Order when the Contractor agrees with the addition and/or deletion of the Work in that Change Order.

18. REQUEST FOR INFORMATION

Any Request for Information shall reference all applicable Contract Document(s), including Specification section(s), detail(s), page number(s), drawing

number(s), and sheet number(s), etc. The Contractor shall make suggestions and interpretations of the issue raised by each Request for Information. A Request for Information cannot modify the Contract Price, Contract Time, or the Contract Documents. Upon request by the District, Contractor shall provide an electronic copy of the Request for Information in addition to the hard copy.

18.2 The Contractor shall be responsible for any costs incurred for professional services that District may deduct from any amounts owing to the Contractor, if a Request for Information requests an interpretation or decision of a matter where the information sought is equally available to the party making the request. District, at its sole discretion, shall deduct from and/or invoice Contractor for all the professional services arising herein.

19. PAYMENTS

19.1 Contract Price

The Contract Price is stated in the Agreement and, including authorized adjustments, is the total amount payable by the District to the Contractor for performance of the Work under the Contract Documents.

19.2 <u>Applications for Progress Payments</u>

19.2.1 <u>Procedure for Applications for Progress Payments</u>

19.2.1.1 Application for Progress Payment

- **19.2.1.1.1** Not before the fifth (5th) day of each calendar month during the progress of the Work, Contractor shall submit to the District and the Architect an itemized Application for Payment for operations completed in accordance with the Schedule of Values. Such application shall be notarized, if required, and supported by the following or each portion thereof unless waived by the District in writing:
 - **19.2.1.1.1** The amount paid to the date of the Application to the Contractor, to all its Subcontractors, and all others furnishing labor, material, or equipment for its Contract;
 - **19.2.1.1.1.2** The amount being requested under the Application for Payment by the Contractor on its own behalf and separately stating the amount requested on behalf of each of the Subcontractors and all others furnishing labor, material, and equipment under the Contract;
 - **19.2.1.1.3** The balance that will be due to each of such entities after said payment is made;
 - **19.2.1.1.4** A certification that the As-Built Drawings and annotated Specifications are current;
 - **19.2.1.1.5** Itemized breakdown of work done for the purpose of requesting partial payment;

- **19.2.1.1.1.6** An updated and acceptable construction schedule in conformance with the provisions herein;
- **19.2.1.1.7** The additions to and subtractions from the Contract Price and Contract Time;
- **19.2.1.1.1.8** A total of the retentions held;
- **19.2.1.1.9** Material invoices, evidence of equipment purchases, rentals, and other support and details of cost as the District may require from time to time;
- **19.2.1.1.1.10** The percentage of completion of the Contractor's Work by line item;
- **19.2.1.1.111** Schedule of Values updated from the preceding Application for Payment;
- **19.2.1.1.1.12** A duly completed and executed conditional waiver and release upon progress payment compliant with Civil Code section 8132 from the Contractor and each subcontractor of any tier and supplier to be paid from the current progress payment;
- **19.2.1.1.13** A duly completed and executed unconditional waiver and release upon progress payment compliant with Civil Code section 8134 from the Contractor and each subcontractor of any tier and supplier that was paid from the previous progress payment(s); and
- **19.2.1.1.14** A certification by the Contractor of the following:

The Contractor warrants title to all Work performed as of the date of this payment application has been completed in accordance with the Contract Documents for the Project. The Contractor further warrants that all amounts have been paid for work which previous Certificates for Payment were issued and payments received and all Work performed as of the date of this payment application is free and clear of liens, claims, security interests, or encumbrances in favor of the Contractor, Subcontractors, material and equipment suppliers, workers, or other persons or entities making a claim by reason of having provided labor, materials, and equipment relating to the Work, except those of which the District has been informed. Submission of sums which have no basis in fact or which Contractor knows are false are at the sole risk of Contractor and may be a violation of the False Claims Act set forth under Government Code section 12650 et seq.

- **19.2.1.1.15** The Contractor shall be subject to the False Claims Act set forth in Government Code section 12650 et seq. for information provided with any Application for Progress Payment.
- **19.2.1.1.16** All remaining certified payroll records ("CPR(s)") for each journeyman, apprentice, worker, or other employee employed by the Contractor and/or each Subcontractor in connection with the Work for the

period of the Application for Payment. As indicated herein, the District shall not make any payment to Contractor until:

- **19.2.1.1.1.16.1** Contractor and/or its Subcontractor(s) provide electronic CPRs directly to the DIR on no less than every 30 days while Work is being performed and within 30 days after the final day of Work performed on the Project for any journeyman, apprentice, worker or other employee was employed in connection with the Work, or within ten (10) days of any request by the District or the DIR to the requesting entity, and
- **19.2.1.1.16.2** Any delay in Contractor and/or its Subcontractor(s) providing CPRs in a timely manner may directly delay the Contractor's payment.
- **19.2.1.1.2** Applications received after June 20th will not be paid until the second week of July and applications received after December 12th will not be paid until the first week of January.

19.2.2 Prerequisites for Progress Payments

- **19.2.2.1** First Payment Request: The following items, if applicable, must be completed before the District will accept and/or process the Contractor's first payment request:
- **19.2.2.1.1** Installation of the Project sign;
- **19.2.2.1.2** Installation of field office;
- **19.2.2.1.3** Installation of temporary facilities and fencing;
- **19.2.2.1.4** Schedule of Values;
- **19.2.2.1.5** Contractor's Construction Schedule;
- **19.2.2.1.6** Schedule of unit prices, if applicable;
- **19.2.2.1.7** Submittal Schedule;
- **19.2.2.1.8** Receipt by Architect of all submittals due as of the date of the payment application;
- **19.2.2.1.9** Copies of necessary permits;
- **19.2.2.1.10** Copies of authorizations and licenses from governing authorities;
- 19.2.2.1.11 Initial progress report;
- **19.2.2.1.12** Surveyor qualifications;
- **19.2.2.1.13** Written acceptance of District's survey of rough grading, if applicable;

- **19.2.2.1.14** List of all Subcontractors, with names, license numbers, telephone numbers, and Scope of Work;
- **19.2.2.1.15** All bonds and insurance endorsements; and
- **19.2.2.1.16** Resumes of Contractor's project manager, and if applicable, job site secretary, record documents recorder, and job site superintendent.
- **19.2.2.2** <u>Second Payment Request</u>: The District will not process the second payment request until and unless all submittals and Shop Drawings have been accepted for review by the Architect.
- **19.2.2.3** <u>No Waiver of Criteria</u>: Any payments made to Contractor where criteria set forth herein have not been met shall not constitute a waiver of said criteria by District. Instead, such payment shall be construed as a good faith effort by District to resolve differences so Contractor may pay its Subcontractors and suppliers. Contractor agrees that failure to submit such items may constitute a breach of contract by Contractor and may subject Contractor to termination.

19.3 <u>Progress Payments</u>

19.3.1 District's Approval of Application for Payment

- **19.3.1.1** Upon receipt of an Application for Payment, The District shall act in accordance with both of the following:
 - **19.3.1.1.1** Each Application for Payment shall be reviewed by the District as soon as practicable after receipt for the purpose of determining that the Application for Payment is a proper Application for Payment.
 - **19.3.1.1.2** Any Application for Payment determined not to be a proper Application for Payment suitable for payment shall be returned to the Contractor as soon as practicable, but not later than seven (7) days, after receipt. An Application for Payment returned pursuant to this paragraph shall be accompanied by a document setting forth in writing the reasons why the Application for Payment is not proper. The number of days available to the District to make a payment without incurring interest pursuant to this section shall be reduced by the number of days by which the District exceeds this seven-day return requirement.
 - **19.3.1.1.3** An Application for Payment shall be considered properly executed if funds are available for payment of the Application for Payment, and payment is not delayed due to an audit inquiry by the financial officer of the District.
- **19.3.1.2** The District's review of the Contractor's Application for Payment will be based on the District's and the Architect's observations at the Site and the data comprising the Application for Payment that the Work has progressed to the point indicated and that, to the best of the District's and the Architect's knowledge, information, and belief, the quality of the Work is in accordance with the Contract Documents. The foregoing representations are subject to:

- **19.3.1.2.1** Observation of the Work for general conformance with the Contract Documents,
- **19.3.1.2.2** Results of subsequent tests and inspections,
- **19.3.1.2.3** Minor deviations from the Contract Documents correctable prior to completion, and
- **19.3.1.2.4** Specific qualifications expressed by the Architect.
- **19.3.1.3** District's approval of the certified Application for Payment shall be based on Contractor complying with all requirements for a fully complete and valid certified Application for Payment.

19.3.2 Payments to Contractor

- **19.3.2.1** Within thirty (30) days after approval of the Application for Payment, Contractor shall be paid a sum equal to ninety-five percent (95%) of the value of the Work performed (as verified by Architect and Inspector and certified by Contractor) up to the last day of the previous month, less the aggregate of previous payments and amount to be withheld. The value of the Work completed shall be Contractor's best estimate. No inaccuracy or error in said estimate shall operate to release the Contractor, or any Surety upon any bond, from damages arising from such Work, or from the District's right to enforce each and every provision of this Contract, and the District shall have the right subsequently to correct any error made in any estimate for payment.
- **19.3.2.2** The Contractor shall not be entitled to have any payment requests processed, or be entitled to have any payment made for Work performed, so long as any lawful or proper direction given by the District concerning the Work, or any portion thereof, remains incomplete.
- **19.3.2.3** If the District fails to make any progress payment within thirty (30) days after receipt of an undisputed and properly submitted Application for Payment from the Contractor, the District shall pay interest to the Contractor equivalent to the legal rate set forth in subdivision (a) of Section 685.010 of the Code of Civil Procedure.

19.3.3 No Waiver

No payment by District hereunder shall be interpreted so as to imply that District has inspected, approved, or accepted any part of the Work. Notwithstanding any payment, the District may enforce each and every provision of this Contract. The District may correct or require correction of any error subsequent to any payment.

19.4 Decisions to Withhold Payment

19.4.1 Reasons to Withhold Payment

The District may withhold payment in whole, or in part, to the extent reasonably necessary to protect the District if, in the District's opinion, the representations to the District required herein cannot be made. The District may withhold payment, in

whole, or in part, to such extent as may be necessary to protect the District from loss because of, but not limited to any of the following:

- **19.4.1.1** Defective Work not remedied within **FORTY-EIGHT (48)** hours of written notice to Contractor.
- **19.4.1.2** Stop Payment Notices or other liens served upon the District as a result of the Contract. Contractor agrees that the District may withhold up to 125% of the amount claimed in the Stop Payment Notice to answer the claim and to provide for the District's reasonable cost of any litigation pursuant to the stop payment notice.
- **19.4.1.3** Written notice to withhold payment from Contractor by payment and/or performance bond surety(ies).
- **19.4.1.4** Liquidated damages assessed against the Contractor.
- **19.4.1.5** The cost of completion of the Contract if there exists a reasonable doubt that the Work can be completed for the unpaid balance of the Contract Price or by the completion date.
- **19.4.1.6** Damage to the District or other contractor(s).
- **19.4.1.7** Unsatisfactory prosecution of the Work by the Contractor.
- **19.4.1.8** Failure to store and properly secure materials.
- **19.4.1.9** Failure of the Contractor to submit, on a timely basis, proper, sufficient, and acceptable documentation required by the Contract Documents, including, without limitation, a Construction Schedule, Schedule of Submittals, Schedule of Values, Monthly Progress Schedules, Shop Drawings, Product Data and samples, Proposed product lists, executed Change Orders, and/or verified reports.
- **19.4.1.10** Failure of the Contractor to maintain As-Built Drawings.
- **19.4.1.11** Erroneous estimates by the Contractor of the value of the Work performed, or other false statements in an Application for Payment.
- **19.4.1.12** Unauthorized deviations from the Contract Documents.
- **19.4.1.13** Failure of the Contractor to prosecute the Work in a timely manner in compliance with the Construction Schedule, established progress schedules, and/or completion dates.
- **19.4.1.14** Failure to provide acceptable electronic certified payroll records, as required by the Labor Code, by these Contract Documents, or by written request; for each journeyman, apprentice, worker, or other employee employed by the Contractor and/or by each Subcontractor in connection with the Work for the period of the Application for Payment or if payroll records are delinquent or inadequate.

- **19.4.1.15** Failure to properly pay prevailing wages as required in Labor Code section 1720 et seq., failure to comply with any other Labor Code requirements, and/or failure to comply with labor compliance monitoring and enforcement by the DIR.
- **19.4.1.16** Allowing an unregistered subcontractor, as described in Labor Code section 1725.5, to engage in the performance of any work under this Contract.
- **19.4.1.17** Failure to comply with any applicable federal statutes and regulations regarding minimum wages, withholding, payrolls and basic records, apprentice and trainee employment requirements, equal employment opportunity requirements, Copeland Act requirements, Davis-Bacon Act and related requirements, Contract Work Hours and Safety Standards Act requirements, if applicable.
- **19.4.1.18** Failure to properly maintain or clean up the Site.
- **19.4.1.19** Failure to timely indemnify, defend, or hold harmless the District.
- **19.4.1.20** Any payments due to the District, including but not limited to payments for failed tests, utilities changes, or permits.
- **19.4.1.21** Failure to pay Subcontractor(s) or supplier(s) as required by law and by the Contract Documents.
- **19.4.1.22** Failure to pay any royalty, license or similar fees.
- **19.4.1.23** Contractor is otherwise in breach, default, or in substantial violation of any provision of this Contract.
- **19.4.1.24** Failure to perform any implementation and/or monitoring required by any SWPPP for the Project and/or the imposition of any penalties or fines therefore whether imposed on the District or Contractor.

19.4.2 Reallocation of Withheld Amounts

- **19.4.2.1** District may, in its discretion, apply any withheld amount to pay outstanding claims or obligations as defined herein. In so doing, District shall make such payments on behalf of Contractor. If any payment is so made by District, then that amount shall be considered a payment made under Contract by District to Contractor and District shall not be liable to Contractor for any payment made in good faith. These payments may be made without prior judicial determination of claim or obligation. District will render Contractor an accounting of funds disbursed on behalf of Contractor.
- **19.4.2.2** If Contractor defaults or neglects to carry out the Work in accordance with the Contract Documents or fails to perform any provision thereof, District may, after **FORTY-EIGHT (48)** hours' written notice to the Contractor and, without prejudice to any other remedy, make good such deficiencies. The District shall adjust the total Contract Price by reducing the amount thereof by the cost of making good such deficiencies. If District deems it inexpedient to correct Work that is damaged, defective, or not done in accordance with Contract provisions, an equitable reduction in the Contract Price (of at least one hundred fifty percent

(150%) of the estimated reasonable value of the nonconforming Work) shall be made therefor.

19.4.3 Payment After Cure

When Contractor removes the grounds for declining approval, payment shall be made for amounts withheld because of them. No interest shall be paid on any retainage or amounts withheld due to the failure of the Contractor to perform in accordance with the terms and conditions of the Contract Documents.

19.5 <u>Subcontractor Payments</u>

19.5.1 Payments to Subcontractors

No later than seven (7) days after receipt, or pursuant to Business and Professions Code section 7108.5 and Public Contract Code section 7107, the Contractor shall pay to each Subcontractor, out of the amount paid to the Contractor on account of such Subcontractor's portion of the Work, the amount to which said Subcontractor is entitled. The Contractor shall, by appropriate agreement with each Subcontractor, require each Subcontractor to make payments to its Sub-subcontractors in a similar manner.

19.5.2 No Obligation of District for Subcontractor Payment

The District shall have no obligation to pay, or to see to the payment of, money to a Subcontractor except as may otherwise be required by law.

19.5.3 Joint Checks

District shall have the right in its sole discretion, if necessary for the protection of the District, to issue joint checks made payable to the Contractor and Subcontractors and/or material or equipment suppliers. The joint check payees shall be responsible for the allocation and disbursement of funds included as part of any such joint payment. In no event shall any joint check payment be construed to create any contract between the District and a Subcontractor of any tier, or a material or equipment supplier, any obligation from the District to such Subcontractor or a material or equipment supplier against the District.

20. COMPLETION OF THE WORK

20.1 Completion

- **20.1.1** District will accept completion of Contract and have the Notice of Completion recorded when the entire Work shall have been completed to the satisfaction of District.
- **20.1.2** The Work may only be accepted as complete by action of the governing board of the District.
- **20.1.3** District, at its sole option, may accept completion of Contract and have the Notice of Completion recorded when the entire Work shall have been completed to the satisfaction of District, except for minor corrective items, as distinguished

from incomplete items. If Contractor fails to complete all minor corrective items within fifteen (15) days after the date of the District's acceptance of completion, District shall withhold from the final payment one hundred fifty percent (150%) of an estimate of the amount sufficient to complete the corrective items, as determined by District, until the item(s) are completed.

20.1.4 At the end of the 15-day period, if there are any items remaining to be corrected, District may elect to proceed as provided herein related to adjustments to Contract Price, and/or District's right to perform the Work of the Contractor.

20.2 <u>Close-Out/Certification Procedures</u>

20.2.1 Punch List

The Contractor shall notify the Architect when Contractor considers the Work complete. Upon notification, Architect will prepare a list of minor items to be completed or corrected ("Punch List"). The Contractor and/or its Subcontractors shall proceed promptly to complete and correct items on the Punch List. Failure to include an item on Punch List does not alter the responsibility of the Contractor to complete all Work in accordance with the Contract Documents.

20.2.2 <u>Close-Out/Certification Requirements</u>

20.2.2.1 Utility Connections

Buildings shall be connected to water, gas, sewer, and electric services, complete and ready for use. Service connections shall be made and existing services reconnected.

20.2.2.2 Record Drawings and Record Specifications

- **20.2.2.1** Contractor shall provide exact Record Drawings of the Work ("As-Builts") and Record Specifications upon completion of the Project and as a condition precedent to approval of final payment.
- **20.2.2.2.** Contractor shall obtain the Inspector's approval of the corrected prints and employ a competent draftsman to transfer the Record Drawings information to the most current version of AutoCAD that is, at that time, currently utilized for plan check submission by either the District, the Architect, OPSC, and/or DSA, and print a complete set of transparent sepias. When completed, Contractor shall deliver corrected sepias and diskette/CD/other data storage device acceptable to District with AutoCAD file to the District.
- **20.2.2.3** Contractor is liable and responsible for any and all inaccuracies in the Record Drawings and Record Specifications, even if inaccuracies become evident at a future date.

20.2.2.3 Construction Storm Water Permit, if applicable

Contractor shall submit to District all electronic or hard copy records required by the Construction Storm Water Permit, if applicable, within seven (7) days of Completion of the Project.

- **20.2.2.4** <u>Maintenance Manuals</u>: Contractor shall prepare all operation and maintenance manuals and date as indicated in the Specifications.
- **20.2.2.5** <u>Source Programming</u>: Contractor shall provide all source programming for all items in the Project.
- **20.2.2.6** <u>Verified Reports</u>: Contractor shall completely and accurately fill out and file forms DSA 6-C or DSA 152 (or current form), as appropriate. Refer to section 4-336 and section 4-343 of Part 1, Title 24 of the California Code of Regulations.

20.3 <u>Final Inspection</u>

- **20.3.1** Contractor shall comply with Punch List procedures as provided herein, and maintain the presence of a Project Superintendent and Project Manager until the Punch List is complete to ensure proper and timely completion of the Punch List. Under no circumstances shall Contractor demobilize its forces prior to completion of the Punch List without District's prior written approval. Upon receipt of Contractor's written notice that all of the Punch List items have been fully completed and the Work is ready for final inspection and District acceptance, Architect and Project Inspector will inspect the Work and shall submit to Contractor and District a final inspection report noting the Work, if any, required in order to complete in accordance with the Contract Documents. Absent unusual circumstances, this report shall consist of the Punch List items not yet satisfactorily completed.
- **20.3.2** Upon Contractor's completion of all items on the Punch List and any other uncompleted portions of the Work, the Contractor shall notify the District and Architect, who shall again inspect such Work. If the Architect finds the Work complete and acceptable under the Contract Documents, the Architect will notify Contractor, who shall then jointly submit to the Architect and the District its final Application for Payment.

20.3.3 <u>Final Inspection Requirements</u>

- **20.3.3.1** Before calling for final inspection, Contractor shall determine that the following have been performed:
 - **20.3.3.1.1** The Work has been completed.
 - **20.3.3.1.2** All life safety items are completed and in working order.
 - **20.3.3.1.3** Mechanical and electrical Work including, without limitation, security system, data, and fire alarm, are complete and tested, fixtures are in place, connected, and ready for tryout.
 - **20.3.3.1.4** Electrical circuits scheduled in panels and disconnect switches labeled.
 - **20.3.3.1.5** Painting and special finishes complete.
 - **20.3.3.1.6** Doors complete with hardware, cleaned of protective film, relieved of sticking or binding, and in working order.

- **20.3.3.1.7** Tops and bottoms of doors sealed.
- **20.3.3.1.8** Floors waxed and polished as specified.
- **20.3.3.1.9** Broken glass replaced and glass cleaned.
- **20.3.3.1.10** Grounds cleared of Contractor's equipment, raked clean of debris, and trash removed from Site.
- **20.3.3.1.11** Work cleaned, free of stains, scratches, and other foreign matter, and damaged and broken material replaced.
- **20.3.3.1.12** Finished and decorative work shall have marks, dirt, and superfluous labels removed.
- **20.3.3.1.13** Final cleanup, as provided herein.

20.4 <u>Costs of Multiple Inspections</u>

More than two (2) requests of the District to make a final inspection shall be considered an additional service of District, Architect, Construction Manager, and/or Project Inspector, and all subsequent costs will be invoiced to Contractor and if funds are available, withheld from remaining payments.

20.5 <u>Partial Occupancy or Use Prior to Completion</u>

20.5.1 <u>District's Rights to Occupancy</u>

The District may occupy or use any completed or partially completed portion of the Work at any stage, and such occupancy shall not constitute the District's Final Acceptance of any part of the Work. Neither the District's Final Acceptance, the making of Final Payment, any provision in Contract Documents, nor the use or occupancy of the Work, in whole or in part, by District shall constitute acceptance of Work not in accordance with the Contract Documents nor relieve the Contractor or the Contractor's Performance Bond Surety from liability with respect to any warranties or responsibility for faulty or defective Work or materials, equipment and workmanship incorporated therein. In the event that the District occupies or uses any completed or partially completed portion of the Work, the Contractor shall remain responsible for payments, security, maintenance, heat, utilities, damage to the Work, insurance, the period for correction of the Work, and the commencement of warranties required by the Contract Documents unless the Contractor requests in writing, and the District agrees, to otherwise divide those responsibilities. Any dispute as to responsibilities shall be resolved pursuant to the Claims and Disputes provisions herein, with the added provision that during the dispute process, the District shall have the right to occupy or use any portion of the Work that it needs or desires to use.

20.5.2 <u>Inspection Prior to Occupancy or Use</u>

Immediately prior to partial occupancy or use, the District, the Contractor, and the Architect shall jointly inspect the area to be occupied or portion of the Work to be used in order to determine and record the condition of the Work.

20.5.3 <u>No Waiver</u>

Unless otherwise agreed upon, partial or entire occupancy or use of a portion or portions of the Work shall not constitute beneficial occupancy or District's acceptance of the Work not complying with the requirements of the Contract Documents.

21. FINAL PAYMENT AND RETENTION

21.1 Final Payment

Upon receipt and approval of a valid and final Application for Payment, the Architect will issue a final Certificate of Payment. The District shall thereupon jointly inspect the Work and either accept the Work as complete or notify the Architect and the Contractor in writing of reasons why the Work is not complete. Upon District's acceptance of the Work of the Contractor as fully complete by the Governing Board of the District (that, absent unusual circumstances, will occur when the Punch List items have been satisfactorily completed), the District shall record a Notice of Completion with the County Recorder, and the Contractor shall, upon receipt of final payment from the District, pay the amount due Subcontractors.

21.2 <u>Prerequisites for Final Payment</u>

The following conditions must be fulfilled prior to Final Payment:

- **21.2.1** A full release of all Stop Payment Notices served in connection with the Work shall be submitted by Contractor.
- **21.2.2** A duly completed and executed conditional waiver and release upon final payment compliant with Civil Code section 8136, from the Contractor and each subcontractor of any tier and supplier to be paid from the final payment.
- **21.2.3** A duly completed and executed unconditional waiver and release upon progress payment compliant with Civil Code section 8134, from the Contractor and each subcontractor of any tier and supplier that was paid from the previous progress payments.
- **21.2.4** A duly completed and executed Document 00 65 19.26, "AGREEMENT AND RELEASE OF ANY AND ALL CLAIMS" from the Contractor.
- **21.2.5** The Contractor shall have made all corrections to the Work that are required to remedy any defects therein, to obtain compliance with the Contract Documents or any requirements of applicable codes and ordinances, or to fulfill any of the orders or directions of District required under the Contract Documents.
- **21.2.6** Each Subcontractor shall have delivered to the Contractor all written guarantees, warranties, applications, and bonds required by the Contract Documents for its portion of the Work.
- **21.2.7** Contractor must have completed all requirements set forth under "Close-Out/Certification Procedures," including, without limitation, submission of an approved set of complete Record Drawings.

- **21.2.8** Architect shall have issued its written approval that final payment can be made.
- **21.2.9** The Contractor shall have delivered to the District all manuals and materials required by the Contract Documents, which must be approved by the District.
- **21.2.10** The Contractor shall have completed final clean-up as provided herein.

21.3 Retention

- **21.3.1** The retention, less any amounts disputed by the District or that the District has the right to withhold pursuant to provisions herein, shall be paid:
 - **21.3.1.1** After approval by the Architect of the Application and Certificate of Payment,
 - **21.3.1.2** After the satisfaction of the conditions set forth herein, and
 - **21.3.1.3** After forty-five (45) days after the recording of the Notice of Completion by District.
- **21.3.2** No interest shall be paid on any retention, or on any amounts withheld due to a failure of the Contractor to perform, in accordance with the terms and conditions of the Contract Documents, except as provided to the contrary in any Escrow Agreement between the District and the Contractor pursuant to Public Contract Code section 22300.

21.4 Substitution of Securities

The District will permit the substitution of securities in accordance with the provisions of Public Contract Code section 22300.

22. UNCOVERING OF WORK

If a portion of the Work is covered without Inspector or Architect approval or not in compliance with the Contract Documents, it must, if required in writing by the District, the Project Inspector, or the Architect, be uncovered for the Project Inspector's or the Architect's observation and be corrected, replaced, and/or recovered at the Contractor's expense without change in the Contract Price or Contract Time.

23. NONCONFORMING WORK AND CORRECTION OF WORK

23.1 <u>Nonconforming Work</u>

23.1.1 Contractor shall promptly remove from Premises all Work identified by District as failing to conform to the Contract Documents whether incorporated or not. Contractor shall promptly replace and re-execute its own Work to comply with the Contract Documents without additional expense to the District and shall bear the expense of making good all work of other contractors destroyed or damaged by any removal or replacement pursuant hereto and/or any delays to the District or other Contractors caused thereby.

23.1.2 If Contractor does not remove Work that District has identified as failing to conform to the Contract Documents within a reasonable time, not to exceed **FORTY-EIGHT (48)** hours, District may remove it and may store any material at Contractor's expense. If Contractor does not pay expense(s) of that removal within ten (10) days' time thereafter, District may, upon ten (10) days' written notice, sell any material at auction or at private sale and shall deduct all costs and expenses incurred by the District and/or District may withhold those amounts from payment(s) to Contractor.

23.2 Correction of Work

23.2.1 Correction of Rejected Work

Pursuant to the notice provisions herein, the Contractor shall immediately correct the Work rejected by the District, the Architect, or the Project Inspector as failing to conform to the requirements of the Contract Documents, whether observed before or after Completion and whether or not fabricated, installed, or completed. The Contractor shall bear costs of correcting the rejected Work, including additional testing, inspections, and compensation for the Inspector's or the Architect's services and expenses made necessary thereby.

23.2.2 One-Year Warranty Corrections

If, within one (1) year after the date of Completion of the Work or a designated portion thereof, or after the date for commencement of warranties established hereunder, or by the terms of an applicable special warranty required by the Contract Documents, any of the Work is found to be not in accordance with the requirements of the Contract Documents, the Contractor shall correct it promptly after receipt of written notice from the District to do so. This period of one (1) year shall be extended with respect to portions of the Work first performed after Completion by the period of time between Completion and the actual performance of the Work. This obligation hereunder shall survive District's acceptance of the Work under the Contract and termination of the Contract. The District shall give such notice promptly after discovery of the condition.

23.3 District's Right to Perform Work

- **23.3.1** If the Contractor should neglect to prosecute the Work properly or fail to perform any provisions of this contract, the District, after **FORTY-EIGHT (48)** hours' written notice to the Contractor, may, without prejudice to any other remedy it may have, make good such deficiencies and may deduct the cost thereof from the payment then or thereafter due the Contractor.
- **23.3.2** If it is found at any time, before or after completion of the Work, that Contractor has varied from the Drawings and/or Specifications, including, but not limited to, variation in material, quality, form, or finish, or in the amount or value of the materials and labor used, District may require at its option:
 - **23.3.2.1** That all such improper Work be removed, remade or replaced, and all work disturbed by these changes be made good by Contractor at no additional cost to the District;
 - **23.3.2.2** That the District deduct from any amount due Contractor the sum of money equivalent to the difference in value between the work performed and that called for by the Drawings and Specifications; or

23.3.2.3 That the District exercise any other remedy it may have at law or under the Contract Documents, including but not limited to the District hiring its own forces or another contractor to replace the Contractor's nonconforming Work, in which case the District shall either issue a deductive Change Order, a Construction Change Directive, or invoice the Contractor for the cost of that work. Contractor shall pay any invoices within thirty (30) days of receipt of same or District may withhold those amounts from payment(s) to Contractor.

24. TERMINATION AND SUSPENSION

24.1 <u>District's Request for Assurances</u>

If District at any time reasonably believes Contractor is or may be in default under this Contract, District may in its sole discretion notify Contractor of this fact and request written assurances from Contractor of performance of Work and a written plan from Contractor to remedy any potential default under the terms this Contract that the District may advise Contractor of in writing. Contractor shall, within ten (10) calendar days of District's request, deliver a written cure plan that meets the District's requirements in its request for assurances. Contractor's failure to provide such written assurances of performance and the required written plan, within ten (10) calendar days of request, will constitute a material breach of this Contract sufficient to justify termination for cause.

24.2 <u>District's Right to Terminate Contractor for Cause</u>

- **24.2.1 Grounds for Termination:** The District, in its sole discretion, may terminate the Contract and/or terminate the Contractor's right to perform the work of the Contract based upon any of the following:
 - **24.2.1.1** Contractor refuses or fails to execute the Work or any separable part thereof with sufficient diligence as will ensure its completion within the time specified or any extension thereof, or
 - **24.2.1.2** Contractor fails to complete said Work within the time specified or any extension thereof, or
 - **24.2.1.3** Contractor persistently fails or refuses to perform Work or provide material of sufficient quality as to be in compliance with Contract Documents; or
 - **24.2.1.4** Contractor persistently refuses, or repeatedly fails, except in cases for which extension of time is provided, to supply enough properly skilled workers or proper materials to complete the Work in the time specified; or
 - **24.2.1.5** Contractor fails to make prompt payment to Subcontractors, or for material, or for labor; or
 - **24.2.1.6** Contractor persistently disregards laws, or ordinances, or instructions of District; or
 - **24.2.1.7** Contractor fails to supply labor, including that of Subcontractors, that is sufficient to prosecute the Work or that can work in harmony with all other elements of labor employed or to be employed on the Work; or

24.2.1.8 Contractor or its Subcontractor(s) is/are otherwise in breach, default, or in substantial violation of any provision of this Contract, including but not limited to a lapse in licensing or registration.

24.2.2 <u>Notification of Termination</u>

- **24.2.2.1** Upon the occurrence at District's sole determination of any of the above conditions, District may, without prejudice to any other right or remedy, serve written notice upon Contractor and its Surety of District's termination of this Contract and/or the Contractor's right to perform the work of the Contract. This notice will contain the reasons for termination. Unless, within three (3) days after the service of the notice, any and all condition(s) shall cease, and any and all violation(s) shall cease, or arrangement satisfactory to District for the correction of the condition(s) and/or violation(s) be made, this Contract and/or the Contractor's right to perform the Work of the Contract shall cease and terminate. Upon termination, Contractor shall not be entitled to receive any further payment until the entire Work is finished.
- **24.2.2.2** Upon termination, District may immediately serve written notice of tender upon Surety whereby Surety shall have the right to take over and perform this Contract only if Surety:
 - **24.2.2.1** Within three (3) days after service upon it of the notice of tender, gives District written notice of Surety's intention to take over and perform this Contract; and
 - **24.2.2.2** Commences performance of this Contract within three (3) days from date of serving of its notice to District.
- **24.2.2.3** Surety shall not utilize Contractor in completing the Project if the District notifies Surety of the District's objection to Contractor's further participation in the completion of the Project. Surety expressly agrees that any contractor which Surety proposes to fulfill Surety's obligations is subject to District's approval. District's approval shall not be unreasonably withheld, conditioned or delayed.
- **24.2.2.4** If Surety fails to notify District or begin performance as indicated herein, District may take over the Work and execute the Work to completion by any method it may deem advisable at the expense of Contractor and/or its Surety. Contractor and/or its Surety shall be liable to District for any excess cost or other damages the District incurs thereby. Time is of the essence in this Contract. If the District takes over the Work as herein provided, District may, without liability for so doing, take possession of and utilize in completing the Work such materials, appliances, plan, and other property belonging to Contractor as may be on the Site of the Work, in bonded storage, or previously paid for.

24.3 <u>Termination of Contractor for Convenience</u>

- **24.3.1** District in its sole discretion may terminate the Contract in whole or in part upon three (3) days' written notice to the Contractor.
- **24.3.2** Upon notice, Contractor shall:

- **24.3.2.1** Cease operations as directed by the District in the notice;
- **24.3.2.2** Take necessary actions for the protection and preservation of the Work as soon as possible; and
- **24.3.2.3** Terminate all existing subcontracts and purchase orders and enter into no further subcontracts and purchase orders.
- **24.3.3** Within 30 days of the notice, Contractor submit to the District a payment application for the actual cost for labor, materials, and services performed, including all Contractor's and Subcontractor(s)' mobilization and/or demobilization costs, that is unpaid. Contractor shall have no claims against the District except for the actual cost for labor, materials, and services performed that adequately documented through timesheets, invoices, receipts, or otherwise. District shall pay all undisputed invoice(s) for work performed until the notice of termination.
- **24.3.4** Under a termination for convenience, the District retains the right to all the options available to the District if there is a termination for cause.

24.4 <u>Effect of Termination</u>

- **24.4.1** Contractor shall, only if ordered to do so by the District, immediately remove from the Site all or any materials and personal property belonging to Contractor that have not been incorporated in the construction of the Work, or which are not in place in the Work. The District retains the right, but not the obligation, to keep and use any materials and personal property belonging to Contractor that have not been incorporated in the construction of the Work, or which are not in place in the Work. The Contractor and its Surety shall be liable upon the Performance Bond for all damages caused to the District by reason of the Contractor's failure to complete the Contract.
- **24.4.2** In the event that the District shall perform any portion of, or the whole of the Work, pursuant to the provisions of the General Conditions, the District shall not be liable nor account to the Contractor in any way for the time within which, or the manner in which, the Work is performed by the District or for any changes the District may make in the Work or for the money expended by the District in satisfying claims and/or suits and/or other obligations in connection with the Work.
- **24.4.3** In the event termination for cause is determined to have not been for cause, the termination shall be deemed to have been a termination for convenience effective as of the same date as the purported termination for cause.
- **24.4.4** In the event that the Contract is terminated for any reason, no allowances or compensation will be granted for the loss of any anticipated profit by the Contractor or any impact or impairment of Contractor's bonding capacity.
- **24.4.5** If the expense to the District to finish the Work exceeds the unpaid Contract Price, Contractor and Surety shall pay difference to District within twenty-one (21) days of District's request.
- **24.4.6** The District shall have the right (but shall have no obligation) to assume and/or assign to a general contractor or construction manager or other third party who is qualified and has sufficient resources to complete the Work, the rights of the

Contractor under its subcontracts with any or all Subcontractors. In the event of an assumption or assignment by the District, no Subcontractor shall have any claim against the District or third party for Work performed by Subcontractor or other matters arising prior to termination of the Contract. The District or any third party, as the case may be, shall be liable only for obligations to the Subcontractor arising after assumption or assignment. Should the District so elect, the Contractor shall execute and deliver all documents and take all steps, including the legal assignment of its contractual rights, as the District may require, for the purpose of fully vesting in the District the rights and benefits of its Subcontractor under Subcontracts or other obligations or commitments. All payments due the Contractor hereunder shall be subject to a right of offset by the District for expenses and damages suffered by the District as a result of any default, acts, or omissions of the Contractor. Contractor must include this assignment provision in all of its contracts with its Subcontractors.

24.4.7 The foregoing provisions are in addition to and not in limitation of any other rights or remedies available to District.

24.5 <u>Emergency Termination of Public Contracts Act of 1949</u>

24.5.1 This Contract is subject to termination as provided by sections 4410 and 4411 of the Government Code of the State of California, being a portion of the Emergency Termination of Public Contracts Act of 1949.

24.5.1.1 Section 4410 of the Government Code states:

In the event a national emergency occurs, and public work, being performed by contract, is stopped, directly or indirectly, because of the freezing or diversion of materials, equipment or labor, as the result of an order or a proclamation of the President of the United States, or of an order of any federal authority, and the circumstances or conditions are such that it is impracticable within a reasonable time to proceed with a substantial portion of the work, then the public agency and the contractor may, by written agreement, terminate said contract.

24.5.1.2 Section 4411 of the Government Code states:

Such an agreement shall include the terms and conditions of the termination of the contract and provision for the payment of compensation or money, if any, which either party shall pay to the other or any other person, under the facts and circumstances in the case.

24.5.2 Compensation to the Contractor shall be determined at the sole discretion of District on the basis of the reasonable value of the Work done, including preparatory work. As an exception to the foregoing and at the District's discretion, in the case of any fully completed separate item or portion of the Work for which there is a separate previously submitted unit price or item on the accepted schedule of values, that price shall control. The District, at its sole discretion, may adopt the Contract Price as the reasonable value of the work done or any portion thereof.

24.6 <u>Suspension of Work</u>

- **24.6.1** District in its sole discretion may suspend, delay or interrupt the Work in whole or in part for such period of time as the District may determine upon three (3) days written notice to the Contractor.
 - **24.6.1.1** An adjustment may be made for changes in the cost of performance of the Work caused by any such suspension, delay or interruption. No adjustment shall be made to the extent:
 - **24.6.1.1.1** That performance is, was or would have been so suspended, delayed or interrupted by another cause for which Contractor is responsible; or
 - **24.6.1.1.2** That an equitable adjustment is made or denied under another provision of the Contract; or
 - **24.6.1.1.3** That the suspension of Work was the direct or indirect result of Contractor's failure to perform any of its obligations hereunder.
 - **24.6.1.2** Any adjustments in cost of performance may have a fixed or percentage fee as provided in the section on Format for Proposed Change Order herein. This amount shall be full compensation for all Contractor's and its Subcontractor(s)' changes in the cost of performance of the Contract caused by any such suspension, delay or interruption.

25. CLAIMS PROCESS

25.1 Obligation to File Claims for Disputed Work

- **25.1.1** Should Contractor otherwise seek extra time or compensation for any reason whatsoever ("Disputed Work"), then Contractor shall first follow procedures set forth in the Contract Documents including, without limitation, Articles 15, 16 and 17, all of which are conditions precedent to submitting a Claim pursuant to Article 25. A Notice of Delay or Proposed Change Order are less formal procedures that proceed the formal claim and do not constitute a Claim. A Claim also does not include correspondence, RFIs, vouchers, invoices, progress payment applications, or other routine or authorized form of requests for progress payments in compliance with the Contract. If a dispute remains, then Contractor shall give written notice to District that expressly invokes this Article 25 within the time limits set forth herein.
- **25.1.2** Contractor's sole and exclusive remedy for Disputed Work is to file a written claim setting forth Contractor's position as required herein within the time limits set forth herein.

25.2 <u>Duty to Perform during Claim Process</u>

Contractor and its subcontractors shall continue to perform its Work under the Contract including the disputed work, and shall not cause a delay of the Work during any dispute, claim, negotiation, mediation, or arbitration proceeding, except by written agreement by the District.

25.3 <u>Definition of Claim</u>

- **25.3.1** Pursuant to Public Contract Code section 9204, the term "Claim" means a separate demand by the Contractor sent by registered mail or certified mail with return receipt requested, for one or more of the following:
 - **25.3.1.1** A time extension, including without limitation, for relief of damages or penalties for delay assessed by the District under the Contract;
 - **25.3.1.2** Payment by the District of money or damages arising from work done by, or on behalf of, the Contractor pursuant to the Contract and payment of which is not otherwise expressly provided for or to which Contractor is not otherwise entitled to; or
 - **25.3.1.3** An amount of payment disputed by the District.

25.4 <u>Claims Presentation</u>

- **25.4.1** Form and Contents of Claim
 - **25.4.1.1** If Contractor intends to submit a Claim for an increase in the Contract Price and/or Contract Time for any reason including, without limitation, the acts of District or its agents, Contractor shall, within thirty (30) days after the event giving rise to the Claim, give notice of the Claim ("Notice of Potential Claim") in writing specifically identifying Contractor is invoking this Article 25 Claims Presentation. The Notice of Potential Claim shall provide Contractor's preliminary request for an adjustment to the Contract Price and/or Contract Time, with a description of the grounds therefore.
 - **25.4.1.2** Within thirty (30) days after serving the written Notice of Potential Claim, Contractor shall provide a Claim including an itemized statement of the details and amounts of its Claim for any increase in the Contract Price of Contract Time as provided below, including a Time Impact Analysis and any and all other documentation substantiating Contractor's claimed damages:
 - **25.4.1.2.1** The issues, events, conditions, circumstances and/or causes giving rise to the dispute, and shall show, in detail, the cause and effect of same;
 - **25.4.1.2.2** Citation to provisions in the Contract Documents, statute sections, and/or case law entitling Contractor to an increase in the Contract Price or Contract Time;
 - **25.4.1.2.3** The pertinent dates and/or durations and actual and/or anticipated effects on the Contract Price, Contract Schedule milestones and/or Contract Time adjustments;
 - **25.4.1.2.4** The Time Impact Analysis of all time delays that shows actual time impact on the critical path; and
 - **25.4.1.2.5** The line-item costs for labor, material, and/or equipment, if applicable, for all cost impacts priced like a change order according to Article

17 and must be updated monthly as to cost and entitlement if a continuing claim.

- **25.4.1.3** The Claim shall include the following certification by the Contractor:
 - **25.4.1.3.1** The undersigned Contractor certifies under penalty of perjury that the attached dispute is made in good faith; that the supporting data is accurate and complete to the best of my knowledge and belief; that the amount requested accurately reflects the adjustment for which Contractor believes the District is liable; and that I am duly authorized to certify the dispute on behalf of the Contractor.
 - **25.4.1.3.2** Furthermore, Contractor understands that the value of the attached dispute expressly includes any and all of the Contractor's costs and expenses, direct and indirect, resulting from the Work performed on the Project, additional time required on the Project and/or resulting from delay to the Project including, without limitation, cumulative impacts. Contractor may not separately recover for overhead or other indirect costs. Any costs, expenses, damages, or time extensions not included are deemed waived.
- **25.4.2** Contractor shall bear all costs incurred in the preparation and submission of a Claim.
- **25.4.3** Failure to timely submit a Claim and the requisite supporting documentation shall constitute a waiver of Contractor's claim(s) against the District and Contractor's Claim(s) for compensation or an extension of time shall be deemed waived, released, and discharged as to any entitlement for adjustment to Contract Price and/or Contract Time.

25.5 Claim Resolution pursuant to Public Contract Code section 9204

Contractor may request to waive the claims procedure under Public Contract Code section 9204 and proceed directly to the commencement of a civil action or binding arbitration. If Contractor chooses to proceed, Contractor shall comply with the following steps:

25.5.1 STEP 1:

25.5.1.1 Upon receipt of a Claim by registered or certified mail, return receipt requested, including the documents necessary to substantiate it, the District shall conduct a reasonable review of the Claim and, within a period not to exceed 45 days, shall provide the Contractor a written statement identifying what portion of the Claim is disputed and what portion is undisputed. Upon receipt of a Claim, the District and Contractor may, by mutual agreement, extend the time period to provide a written statement. If the District needs approval from its governing body to provide the Contractor a written statement identifying the disputed portion and the undisputed portion of the Claim, and the governing body does not meet within the 45 days or within the mutually agreed to extension of time following receipt of Claim sent by registered mail or certified mail, return receipt requested, the District shall have up to three (3) days following the next duly publicly noticed meeting of the governing body after the 45-day period, or extension, expires to provide Contractor a written statement identifying the disputed portion and the undisputed portion.

- **25.5.1.1.1** Any payment due on an undisputed portion of the Claim shall be processed and made within 60 days after the District issues its written statement. Amounts not paid in a timely manner as required by this section, section 25.4, shall bear interest at seven percent (7%) per annum.
- **25.5.1.2** Upon receipt of a Claim, the parties may mutually agree to waive, in writing, mediation and proceed directly to the commencement of a civil action or binding arbitration, as applicable. In this instance, District and Contractor must comply with the sections below regarding Public Contract Code section 20104 et seq. and Government Code Claim Act Claims.
- **25.5.1.3** If the District fails to issue a written statement, or to otherwise meet the time requirements of this section, this shall result in the Claim being deemed rejected in its entirety. A Claim that is denied by reason of the District's failure to have responded to a Claim, or its failure to otherwise meet the time requirements of this section, shall not constitute an adverse finding with regard to the merits of the Claim or the responsibility or qualifications of Contractor.

25.5.2 STEP 2:

- **25.5.2.1** If Contractor disputes the District's written response, or if the District fails to respond to a Claim within the time prescribed, Contractor may demand in writing an informal conference to meet and confer for settlement of the issues in dispute. Upon receipt of a demand in writing sent by registered mail or certified mail, return receipt requested, the District shall schedule a meet and confer conference within 30 days for settlement of the dispute. Within 10 business days following the conclusion of the meet and confer conference, if the Claim or any portion of the Claim remains in dispute, the District shall provide the Contractor a written statement identifying the portion of the Claim that remains in dispute and the portion that is undisputed.
 - **25.5.2.1.1.1** Any payment due on an undisputed portion of the Claim shall be processed and made within 60 days after the District issues its written statement. Amounts not paid in a timely manner as required by this section, section 25.4, shall bear interest at seven percent (7%) per annum.

25.5.3 STEP 3:

- **25.5.3.1** Any disputed portion of the Claim, as identified by Contractor in writing, shall be submitted to nonbinding mediation, with the District and Contractor sharing the associated costs equally. The District and Contractor shall mutually agree to a mediator within 10 business days after the disputed portion of the Claim has been identified in writing. If the parties cannot agree upon a mediator, each party shall select a mediator and those mediators shall select a qualified neutral third party to mediate with regard to the disputed portion of the Claim. Each party shall bear the fees and costs charged by its respective mediator in connection with the selection of the neutral mediator. If mediation is unsuccessful, the parts of the Claim remaining in dispute shall be subject to applicable procedures outside this section.
 - **25.5.3.1.1** For purposes of this section, mediation includes any nonbinding process, including, but not limited to, neutral evaluation or a dispute review

board, in which an independent third party or board assists the parties in dispute resolution through negotiation or by issuance of an evaluation. Any mediation utilized shall conform to the timeframes in this section.

25.5.3.2 Unless otherwise agreed to by the District and Contractor in writing, the mediation conducted pursuant to this section shall excuse any further obligation under Public Contract Code section 20104.4 to mediate after litigation has been commenced.

25.5.4 STEP 4:

25.5.4.1 If mediation under this section does not resolve the parties' dispute, the District may, but does not require arbitration of disputes under private arbitration or the Public Works Contract Arbitration Program.

25.6 <u>Subcontractor Pass-Through Claims</u>

- **25.6.1** If a subcontractor or a lower tier subcontractor lacks legal standing to assert a claim against a District because privity of contract does not exist, the contractor may present to the District a Claim on behalf of a subcontractor or lower tier subcontractor. A subcontractor may request in writing, either on his or her own behalf or on behalf of a lower tier subcontractor, that Contractor present a Claim for work which was performed by the subcontractor or by a lower tier subcontractor on behalf of the subcontractor. The subcontractor requesting that the Claim be presented to the District shall furnish reasonable documentation to support the Claim.
- **25.6.2** Within 45 days of receipt of this written request from a subcontractor, Contractor shall notify the subcontractor in writing as to whether the Contractor presented the Claim to the District and, if Contractor did not present the Claim, provide the subcontractor with a statement of the reasons for not having done so.
- **25.6.3** The Contractor shall bind all its Subcontractors to the provisions of this section and will hold the District harmless against Claims by Subcontractors.

25.7 Government Code Claim Act Claim

- **25.7.1** If a claim, or any portion thereof, remains in dispute upon satisfaction of all applicable Claim Resolution requirements the Contractor shall comply with all claims presentation requirements as provided in Chapter 1 (commencing with section 900) and Chapter 2 (commencing with section 910) of Part 3 of Division 3.6 of Title 1 of Government Code as a condition precedent to the Contractor's right to bring a civil action against the District.
- **25.7.2** Contractor shall bear all costs incurred in the preparation, submission and administration of a Claim. Any claims presented in accordance with the Government Code must affirmatively indicate Contractor's prior compliance with the claims procedure herein of the claims asserted.
- **25.7.3** For purposes of those provisions, the running of the time within which a claim pursuant to Public Contract Code section 20104.2 only must be presented to the District shall be tolled from the time the claimant submits his or her written claim pursuant to subdivision (a) until the time that claim is denied as a result of the meet

and confer process, including any period of time utilized by the meet and confer process.

25.8 <u>Claim Resolution pursuant to Public Contract Code section 20104 et seq.</u>

- **25.8.1** In the event of a disagreement between the parties as to performance of the Work, the interpretation of this Contract, or payment or nonpayment for Work performed or not performed, the parties shall attempt to resolve all claims of three hundred seventy-five thousand dollars (\$375,000) or less which arise between Contractor and District by those procedures set forth in Public Contract Code section 20104, et seq., to the extent applicable.
 - **25.8.1.1** Contractor shall file with the District any written Claim, including the documents necessary to substantiate it, upon the application for final payment.
 - **25.8.1.2** For claims of less than fifty thousand dollars (\$50,000), the District shall respond in writing within forty-five (45) days of receipt of the Claim or may request in writing within thirty (30) days of receipt of the Claim any additional documentation supporting the Claim or relating to defenses or claims the District may have against the Contractor.
 - **25.8.1.2.1** If additional information is required, it shall be requested and provided by mutual agreement of the parties.
 - **25.8.1.2.2** District's written response to the documented Claim shall be submitted to the Contractor within fifteen (15) days after receipt of the further documentation or within a period of time no greater than that taken by the Contractor to produce the additional information, whichever is greater.
 - **25.8.1.3** For claims of over fifty thousand dollars (\$50,000) and less than or equal to three hundred seventy-five thousand dollars (\$375,000), the District shall respond in writing to all written Claims within sixty (60) days of receipt of the claim, or may request, in writing, within thirty (30) days of receipt of the Claim any additional documentation supporting the Claim or relating to defenses or claims the District may have against the Contractor.
 - **25.8.1.3.1** If additional information is required, it shall be requested and provided upon mutual agreement of the District and the Contractor.
 - **25.8.1.3.2** The District's written response to the Claim, as further documented, shall be submitted to the Contractor within thirty (30) days after receipt of the further documentation, or within a period of time no greater than that taken by the Contractor to produce the additional information or requested documentation, whichever is greater.
 - **25.8.1.4** If Contractor disputes the District's written response, or the District fails to respond within the time prescribed, Contractor may so notify the District, in writing, either within fifteen (15) days of receipt of the District's response or within fifteen (15) days of the District's failure to respond within the time prescribed, respectively, and demand an informal conference to meet and confer for settlement of the issues in dispute. Upon a demand, the District shall

schedule a meet and confer conference within thirty (30) days for settlement of the dispute.

- **25.8.1.5** Following the meet and confer conference, if the Claim or any portion of it remains in dispute, the Contractor may file a claim as provided in Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code. For purposes of those provisions the running of the time within which a claim must be filed shall be tolled from the time the Contractor submits its written Claim until the time the Claim is denied, including any period of time utilized by the meet and confer process.
- **25.8.1.6** For any civil action filed to resolve claims filed pursuant to this section, within sixty (60) days, but no earlier than thirty (30) days, following the filing of responsive pleadings, the court shall submit the matter to nonbinding mediation unless waived by mutual stipulation of both parties. The mediation process shall provide for the selection within fifteen (15) days by both parties of a disinterested third person as mediator, shall be commenced within thirty (30) days of the submittal, and shall be concluded within fifteen (15) days from the commencement of the mediation unless a time requirement is extended upon a good cause showing to the court or by stipulation of both parties. If the parties fail to select a mediator within the 15-day period, any party may petition the court to appoint the mediator.
- **25.8.1.7** If the matter remains in dispute, the case shall be submitted to judicial arbitration pursuant to Chapter 2.5 (commencing with Section 1141.10) of the Title 3 of Part 3 of the Code of Civil Procedure, notwithstanding Section 1141.11 of that code. The Civil Discovery Act of 1986, (Article 3 (commencing with Section 2016) of Chapter 3 of Title 3 of part 4 of the Code of Civil Procedure) shall apply to any proceeding brought under this subdivision consistent with the rules pertaining to judicial arbitration.
- **25.8.1.8** The District shall not fail to pay money as to any portion of a Claim which is undisputed except as otherwise provided in the Contract Documents. In any suit filed pursuant to this section, the District shall pay interest due at the legal rate on any arbitration award or judgment. Interest shall begin to accrue on the date the suit is filed in a court of law.
- **25.8.2** Contractor shall bind its Subcontractors to the provisions of this Section and will hold the District harmless against disputes by Subcontractors.

25.9 <u>Claim Procedure Compliance</u>

- **25.9.1** Failure to submit and administer claims as required in Article 25 shall waive Contractor's right to claim on any specific issues not included in a timely submitted claim. Claim(s) not raised in a timely protest and timely claim submitted under this Article 25 may not be asserted in any subsequent litigation, Government Code Claim, or legal action.
- **25.9.2** District shall not be deemed to waive any provision under this Article 25, if at District's sole discretion, a claim is administered in a manner not in accord with this Article 25. Waivers or modifications of this Article 25 may only be made by a

signed change order approved as to form by legal counsel for both District and Contractor; oral or implied modifications shall be ineffective.

25.10 <u>Claim Resolution Non-Applicability</u>

- **25.10.1** The procedures for dispute and claim resolutions set forth in this Article shall not apply to the following:
 - **25.10.1.1** Personal injury, wrongful death or property damage claims;
 - 25.10.1.2 Latent defect or breach of warranty or guarantee to repair;
 - 25.10.1.3 Stop payment notices;
 - 25.10.1.4 District's rights set forth in the Article on Suspension and Termination;
 - **25.10.1.5** Disputes arising out of labor compliance enforcement by the Department of Industrial Relations; or
 - **25.10.1.6** District rights and obligations as a public entity set forth in applicable statutes; provided, however, that penalties imposed against a public entity by statutes, including, but not limited to, Public Contract Code sections 20104.50 and 7107, shall be subject to the Claim Resolution requirements provided in this Article.

25.11 Attorney's Fees

25.11.1 Should litigation be necessary to enforce any terms or provisions of this Agreement, then each party shall bear its own litigation and collection expenses, witness fees, court costs, and attorney's fees.

26. STATE LABOR, WAGE & HOUR, APPRENTICE, AND RELATED PROVISIONS

26.1 Labor Compliance and Enforcement

Since this Project is subject to labor compliance and enforcement by the Department of Industrial Relations ("DIR"), Contractor specifically acknowledges and understands that it shall perform the Work of this Agreement while complying with all the applicable provisions of Division 2, Part 7, Chapter 1, of the Labor Code and Title 8 of the California Code of Regulations, including, without limitation, the requirement that the Contractor and all Subcontractors shall timely furnish complete and accurate electronic certified payroll records directly to the DIR. The District may not issue payment if this requirement is not met.

26.2 <u>Wage Rates, Travel, and Subsistence</u>

26.2.1 Pursuant to the provisions of Article 2 (commencing at section 1770), Chapter 1, Part 7, Division 2, of the Labor Code, the general prevailing rate of per diem wages and the general prevailing rate for holiday and overtime work in the locality in which this public work is to be performed for each craft, classification, or type of worker needed to execute this Contract are on file at the District's principal office and copies will be made available to any interested party on request. Contractor shall obtain and post a copy of these wage rates at the job site.

- **26.2.2** Holiday and overtime work, when permitted by law, shall be paid for at the general prevailing rate of per diem wages for holiday and overtime work on file with the Director of the Department of Industrial Relations, unless otherwise specified. The holidays upon which those rates shall be paid need not be specified by the District, but shall be all holidays recognized in the applicable collective bargaining agreement. If the prevailing rate is not based on a collectively bargained rate, the holidays upon which the prevailing rate shall be paid shall be as provided in Section 6700 of the Government Code.
- **26.2.3** Contractor shall pay and shall cause to be paid each worker engaged in Work on the Project the general prevailing rate of per diem wages determined by the Director of the Department of Industrial Relations, regardless of any contractual relationship which may be alleged to exist between Contractor or any Subcontractor and such workers.
- **26.2.4** If during the period this bid is required to remain open, the Director of the Department of Industrial Relations determines that there has been a change in any prevailing rate of per diem wages in the locality in which the Work under the Contract is to be performed, such change shall not alter the wage rates in the Notice to Bidders or the Contract subsequently awarded.
- **26.2.5** Pursuant to Labor Code section 1775, Contractor shall, as a penalty to District, forfeit the statutory amount (believed by the District to be currently up to two hundred dollars (\$200) for each calendar day, or portion thereof, for each worker paid less than the prevailing rates, determined by the District and/or the Director, for the work or craft in which that worker is employed for any public work done under Contract by Contractor or by any Subcontractor under it. The difference between such prevailing wage rates and the amount paid to each worker for each calendar day or portion thereof for which each worker was paid less than the prevailing wage rate shall be paid to each worker by Contractor.
- **26.2.6** Any worker employed to perform Work on the Project, which Work is not covered by any classification listed in the general prevailing wage rate of per diem wages determined by the Director, shall be paid not less than the minimum rate of wages specified therein for the classification which most nearly corresponds to Work to be performed by him, and such minimum wage rate shall be retroactive to time of initial employment of such person in such classification.
- **26.2.7** Pursuant to Labor Code section 1773.1, per diem wages are deemed to include employer payments for health and welfare, pension, vacation, travel time, subsistence pay, and apprenticeship or other training programs authorized by Labor Code section 3093, and similar purposes.
- **26.2.8** Contractor shall post at appropriate conspicuous points on the Site of Project, a schedule showing all determined minimum wage rates and all authorized deductions, if any, from unpaid wages actually earned. In addition, Contractor shall post a sign-in log for all workers and visitors to the Site, a list of all subcontractors of any tier on the Site, and the required Equal Employment Opportunity poster(s).

26.3 Hours of Work

26.3.1 As provided in article 3 (commencing at section 1810), chapter 1, part 7, division 2, of the Labor Code, eight (8) hours of labor shall constitute a legal day's

- work. The time of service of any worker employed at any time by Contractor or by any Subcontractor on any subcontract under this Contract upon the Work or upon any part of the Work contemplated by this Contract shall be limited and restricted by Contractor to eight (8) hours per day, and forty (40) hours during any one week, except as hereinafter provided. Notwithstanding the provisions hereinabove set forth, Work performed by employees of Contractor in excess of eight (8) hours per day and forty (40) hours during any one week, shall be permitted upon this public work upon compensation for all hours worked in excess of eight (8) hours per day at not less than one and one-half times the basic rate of pay.
- **26.3.2** Contractor shall keep and shall cause each Subcontractor to keep an accurate record showing the name of and actual hours worked each calendar day and each calendar week by each worker employed by Contractor in connection with the Work or any part of the Work contemplated by this Contract. The record shall be kept open at all reasonable hours to the inspection of District and to the Division of Labor Standards Enforcement of the DIR.
- **26.3.3** Pursuant to Labor Code section 1813, Contractor shall as a penalty to the District forfeit the statutory amount (believed by the District to be currently twenty-five dollars (\$25)) for each worker employed in the execution of this Contract by Contractor or by any Subcontractor for each calendar day during which such worker is required or permitted to work more than eight (8) hours in any one calendar day and forty (40) hours in any one calendar week in violation of the provisions of article 3 (commencing at section 1810), chapter 1, part 7, division 2, of the Labor Code.
- **26.3.4** Any Work necessary to be performed after regular working hours, or on Sundays or other holidays shall be performed without additional expense to the District.

26.4 Payroll Records

- **26.4.1** Contractor shall upload, and shall cause each Subcontractor performing any portion of the Work under this Contract to upload, an accurate and complete certified payroll record ("CPR") electronically using DIR's eCPR System by uploading the CPRs by electronic XML file or entering each record manually using the DIR's iform (or current form) online on no less than every 30 days while Work is being performed and within 30 days after the final day of Work performed on the Project and within ten (10) days of any request by the District or Labor Commissioner at http://www.dir.ca.gov/Public-Works/Certified-Payroll-Reporting.html or current application and URL, showing the name, address, social security number, work classification, straight-time, and overtime hours worked each day and week, and the actual per diem wages paid to each journeyman, apprentice, worker, or other employee employed by the Contractor and/or each Subcontractor in connection with the Work.
 - **26.4.1.1** The CPRs enumerated hereunder shall be filed directly with the DIR on a weekly basis or to the requesting party, whether the District or DIR, within ten (10) days after receipt of each written request. The CPRs from the Contractor and each Subcontractor for each week shall be provided on or before Wednesday of the week following the week covered by the CPRs. District may not make any payment to Contractor until:

- **26.4.1.1.1** Contractor and/or its Subcontractor(s) provide CPRs acceptable to the DIR; and
- **26.4.1.1.2** Any delay in Contractor and/or its Subcontractor(s) providing CPRs to the DIR in a timely manner may directly delay Contractor's payment.
- **26.4.2** All CPRs shall be available for inspection at all reasonable hours at the principal office of Contractor on the following basis:
 - **26.4.2.1** A certified copy of an employee's CPR shall be made available for inspection or furnished to the employee or his/her authorized representative on request.
 - **26.4.2.2** CPRs shall be made available for inspection or furnished upon request to a representative of District, Division of Labor Standards Enforcement, Division of Apprenticeship Standards, and/or the DIR.
 - **26.4.2.3** CPRs shall be made available upon request by the public for inspection or copies thereof made; provided, however, that a request by the public shall be made through the District, Division of Apprenticeship Standards, or the Division of Labor Standards Enforcement. If the requested CPRs have not been provided pursuant to the provisions herein, the requesting party shall, prior to being provided the records, reimburse the costs of preparation by Contractor, Subcontractors, and the entity through which the request was made. The public shall not be given access to the records at the principal office of Contractor.
- **26.4.3** Any copy of records made available for inspection as copies and furnished upon request to the public or any public agency by District, Division of Apprenticeship Standards, or Division of Labor Standards Enforcement shall be marked or obliterated in such a manner as to prevent disclosure of an individual's name, address, and social security number. The name and address of Contractor awarded Contract or performing Contract shall not be marked or obliterated.
- **26.4.4** Contractor shall inform District of the location of the records enumerated hereunder, including the street address, city, and county, and shall, within five (5) working days, provide a notice of change of location and address.
- **26.4.5** In the event of noncompliance with the requirements of this section, Contractor shall have ten (10) days in which to comply subsequent to receipt of written notice specifying in what respects Contractor must comply with this section. Should noncompliance still be evident after the ten (10) day period, Contractor shall, as a penalty to District, forfeit up to one hundred dollars (\$100) for each calendar day, or portion thereof, for each worker, until strict compliance is effectuated. Upon the request of the Labor Commissioner, these penalties shall be withheld from progress payments then due.

26.4.6 [RESERVED]

26.5 [RESERVED]

26.6 Apprentices

- **26.6.1** Contractor acknowledges and agrees that, if this Contract involves a dollar amount greater than, or a number of working days greater than that specified in Labor Code section 1777.5, then this Contract is governed by the provisions of Labor Code Section 1777.5. It shall be the responsibility of Contractor to ensure compliance with this Article and with Labor Code section 1777.5 for all apprenticeship occupations.
- **26.6.2** Apprentices of any crafts or trades may be employed and, when required by Labor Code section 1777.5, shall be employed provided they are properly registered in full compliance with the provisions of the Labor Code.
- **26.6.3** Every such apprentice shall be paid the standard wage paid to apprentices under the regulations of the craft or trade at which he/she is employed, and shall be employed only at the work of the craft or trade to which she/he is registered.
- **26.6.4** Only apprentices, as defined in section 3077 of the Labor Code, who are in training under apprenticeship standards and written apprentice agreements under chapter 4 (commencing at section 3070), division 3, of the Labor Code, are eligible to be employed. The employment and training of each apprentice shall be in accordance with the provisions of the apprenticeship standards and apprentice agreements under which he/she is training.
- **26.6.5** Pursuant to Labor Code section 1777.5, if that section applies to this Contract as indicated above, Contractor and any Subcontractors employing workers in any apprenticeable craft or trade in performing any Work under this Contract shall apply to the applicable joint apprenticeship committee for a certificate approving the Contractor or Subcontractor under the applicable apprenticeship standards and fixing the ratio of apprentices to journeymen employed in performing the Work.
- **26.6.6** Pursuant to Labor Code section 1777.5, if that section applies to this Contract as indicated above, Contractor and any Subcontractor may be required to make contributions to the apprenticeship program.
- **26.6.7** If Contractor or Subcontractor willfully fails to comply with Labor Code section 1777.5, then, upon a determination of noncompliance by the Administrator of Apprenticeship, it shall:
 - **26.6.7.1** Be denied the right to bid on any subsequent project for one (1) year from the date of such determination;
 - **26.6.7.2** Forfeit as a penalty to District the full amount as stated in Labor Code section 1777.7. Interpretation and enforcement of these provisions shall be in accordance with the rules and procedures of the California Apprenticeship Council and under the authority of the Chief of the Division of Apprenticeship Standards.
- **26.6.8** Contractor and all Subcontractors shall comply with Labor Code section 1777.6, which section forbids certain discriminatory practices in the employment of apprentices.
- **26.6.9** Contractor shall become fully acquainted with the law regarding apprentices prior to commencement of the Work. Special attention is directed to

sections 1777.5, 1777.6, and 1777.7 of the Labor Code, and title 8, California Code of Regulations, section 200 et seq. Questions may be directed to the State Division of Apprenticeship Standards, 455 Golden Gate Avenue, 9th floor, San Francisco, California 94102.

26.7 <u>Non-Discrimination</u>

- **26.7.1** Contractor herein agrees to comply with the provisions of the California Fair Employment and Housing Act as set forth in part 2.8 of division 3 of the California Government Code, commencing at section 12900; the Federal Civil Rights Act of 1964, as set forth in Public Law 88-352, and all amendments thereto; Executive Order 11246; and all administrative rules and regulations found to be applicable to Contractor and Subcontractor.
- **26.7.2** Special requirements for Federally Assisted Construction Contracts: During the performance of this Contract, Contractor agrees to incorporate in all subcontracts the provisions set forth in Chapter 60-1.4(b) of Title 41 published in Volume 33 No. 104 of the Federal Register dated May 28, 1968.

26.8 <u>Labor First Aid</u>

Contractor shall maintain emergency first aid treatment for Contractor's workers on the Project which complies with the Federal Occupational Safety and Health Act of 1970 (29 U.S.C. § 651 et seq.) and the California Occupational Safety and Health Act of 1973 (Lab. Code, § 6300 et seq.; 8 Cal. Code of Regs., § 330 et seq.).

27. [RESERVED]

28. MISCELLANEOUS

28.1 Assignment of Antitrust Actions

28.1.1 Section 7103.5(b) of the Public Contract Code states:

In entering into a public works contract or subcontract to supply goods, services, or materials pursuant to a public works contract, the Contractor or subcontractor offers and agrees to assign to the awarding body all rights, title, and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Sec. 15) or under the Cartwright Act (Chapter 2 (commending with Section 16700) of Part 2 of Division 7 of the Business and Professions Code), arising from purchases of goods, which assignment shall be made and become effective at the time the awarding body tenders final payment to the Contractor, without further acknowledgment by the parties.

28.1.2 Section 4552 of the Government Code states:

In submitting a bid to a public purchasing body, the bidder offers and agrees that if the bid is accepted, it will assign to the purchasing body all rights, title, and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Sec. 15) or under the Cartwright Act (Chapter 2 (commencing with Section 16700) of Part 2 of Division 7 of the Business and Professions Code), arising from purchases of goods, materials, or services by the bidder for sale to the purchasing body pursuant to the bid. Such assignment shall be made and become effective at the time the purchasing body tenders final payment to the bidder.

28.1.3 Section 4553 of the Government Code states:

If an awarding body or public purchasing body receives, either through judgment or settlement, a monetary recovery for a cause of action assigned under this chapter, the assignor shall be entitled to receive reimbursement for actual legal costs incurred and may, upon demand, recover from the public body any portion of the recovery, including treble damages, attributable to overcharges that were paid by the assignor but were not paid by the public body as part of the bid price, less the expenses incurred in obtaining that portion of the recovery.

28.1.4 Section 4554 of the Government Code states:

Upon demand in writing by the assignor, the assignee shall, within one year from such demand, reassign the cause of action assigned under this part if the assignor has been or may have been injured by the violation of law for which the cause of action arose and (a) the assignee has not been injured thereby, or (b) the assignee declines to file a court action for the cause of action.

28.1.5 Under this Article, "public purchasing body" is District and "bidder" is Contractor.

28.2 Excise Taxes

If, under Federal Excise Tax Law, any transaction hereunder constitutes a sale on which a Federal Excise Tax is imposed and the sale is exempt from such Federal Excise Tax because it is a sale to a State or Local Government for its exclusive use, District, upon request, will execute documents necessary to show (1) that District is a political subdivision of the State for the purposes of such exemption, and (2) that the sale is for the exclusive use of District. No Federal Excise Tax for such materials shall be included in any Contract Price.

28.3 <u>Taxes</u>

Contract Price is to include any and all applicable sales taxes or other taxes that may be due in accordance with section 7051 et seq. of the Revenue and Taxation Code, Regulation 1521 of the State Board of Equalization or any other tax code that may be applicable.

28.4 Shipments

Contractor is responsible for any or all damage or loss to shipments until delivered and accepted on Site, as indicated in the Contract Documents. There must be no charge for containers, packing, unpacking, drayage, or insurance. The total Contract Price shall be all inclusive (including sales tax) and no additional costs of any type will be considered.

28.5 <u>Compliance with Government Reporting Requirements</u>

If this Contract is subject to federal or other governmental reporting requirements because of federal or other governmental financing in whole or in part for the Project of which it is part, or for any other reason, Contactor shall comply with those reporting requirements at the request of the District at no additional cost.

END OF DOCUMENT

DOCUMENT 00 73 13

SPECIAL CONDITIONS

THIS DOCUMENT MUST BE ADAPTED FOR EACH PROJECT – Delete any provision that is not applicable or if no change from the provision in the General Conditions.

*** THIS LIST OF SPECIAL CONDITION PROVISIONS IS FOR REFERENCE ONLY. REMOVE THIS PAGE BEFORE USING THIS DOCUMENT. ***

- 1. Mitigation Measures
- 2. Modernization Projects
- 3. Badge Policy for Contractors
- 4. Substitution for Specified Items
- 5. Weather Days
- 6. Owner-Controlled or Wrap-Up Insurance Program
- 7. Insurance Policy Limits
- 8. Permits, Certificates, Licenses, Fees, Approval
- 9. Project Labor Agreement/Payroll Records
- 10. As-Builts and Record Drawings
- 11. Disabled Veteran Business Enterprises
- 12. Construction Manager
- 13. Program Manager
- 14. Federal Funds Wages
- 15. Federal Funds Debarment
- 16. Federal Funds Byrd Anti-Lobbying
- 17. Federal Funds Procurement of recovered materials
- 18. Federal Funds Domestic preferences for procurements
- 19. Preliminary Schedule of Values
- 20. COVID-19 Safety Requirements
- 21. COVID-19 Vaccination/Testing Requirements

DOCUMENT 00 73 13

SPECIAL CONDITIONS

1. <u>Mitigation Measures</u>

Contractor shall comply with all applicable mitigation measures, if any, adopted by any public agency with respect to this Project pursuant to the California Environmental Quality Act. (Public Resources Code section 21000 *et seq.*)

2. Modernization Projects

- A. Access. Access to the school buildings and entry to buildings, classrooms, restrooms, mechanical rooms, electrical rooms, or other rooms, for construction purposes, must be coordinated with District and onsite District personnel before Work is to start. Unless agreed to otherwise in writing, only a school custodian will be allowed to unlock and lock doors in existing building(s). The custodian will be available only while school is in session. If a custodian is required to arrive before 7:00 a.m. or leave after 3:30 p.m. to accommodate Contractor's Work, the overtime wages for the custodian will be paid by the Contractor, unless at the discretion of the District, other arrangements are made in advance.
- B. Keys. Upon request, the District may, at its own discretion, provide keys to the school site for the convenience of the Contractor. The Contractor agrees to pay all expenses to re-key the entire school site and all other affected District buildings if the keys are lost or stolen, or if any unauthorized party obtains a copy of the key or access to the school.
- C. Maintaining Services. The Contractor is advised that Work is to be performed in spaces regularly scheduled for instruction. Interruption and/or periods of shutdown of public access, electrical service, water service, lighting, or other utilities shall be only as arranged in advance with the District. Contractor shall provide temporary services to all facilities interrupted by Contractor's Work.
- D. Maintaining Utilities. The Contractor shall maintain in operation during duration of Contract, drainage lines, storm drains, sewers, water, gas, electrical, steam, and other utility service lines within working area.
- E. Confidentiality. Contractor shall maintain the confidentiality of all information, documents, programs, procedures and all other items that Contractor encounters while performing the Work. This requirement shall be ongoing and shall survive the expiration or termination of this Contract and specifically includes, without limitation, all student, parent, and employee disciplinary information and health information.
- F. Work during Instructional Time. By submitting its bid, Contractor affirms that Work may be performed during ongoing instruction in existing facilities. If so, Contractor agrees to cooperate to the best of its ability to minimize any disruption to school operations and any use of school facilities by the public up to, and including, rescheduling specific work activities, at no additional cost to District.
- G. No Work during Student Testing. Contractor shall, at no additional cost to the District and at the District's request, coordinate its Work to not disturb District students including, without limitation, not performing any Work when students at the Site are taking State or Federally-required tests.

3. Badge Policy for Contractors

All Contractors doing work for the District will provide their workers with identification badges. These badges will be worn by all members of the Contractor's staff who are working in a District facility.

A. <u>Badges must be filled out in full and contain the following information:</u>

- **3.1.1** Name of Contractor
- **3.1.2** Name of Employee
- **3.1.3** Contractor's address and phone number
- B. Badges are to be worn when the Contractor or his/her employees are on site and must be visible at all times. Contractors must inform their employees that they are required to allow District employees, the Architect, the Construction Manager, the Program Manager, or the Project Inspector to review the information on the badges upon request.
- C. Continued failure to display identification badges as required by this policy may result in the individual being removed from the Project or assessment of fines against the Contractor.
- 4. Not Used
- 5. Not used
- 6. <u>As-Builts and Record Drawings</u>
 - **6.1** Contractor shall submit Record Drawings pursuant to the Contract Documents consisting of one set of computer-aided design and drafting ("CADD") files in the following format searchable PDF on a flash drive and one full sized hard copy.
 - 6.2

7. Disabled Veteran Business Enterprises

This Project uses or may plan to use funds allocated pursuant to the State of California School Facility Program ("Program") for the construction and/or modernization of school buildings. Therefore, Section 17076.11 of the Education Code requires the District to have a participation goal for disabled veteran business enterprises ("DVBE") of at least three percent (3%), per year, of the overall dollar amount expended each year by the District on projects that receive state funding. The Contractor must submit the Disabled Veteran Business Enterprise Participation Certification to the District with its executed Agreement, identifying the steps Contractor took to solicit DVBE participation in conjunction with this Contract.

8. <u>Construction Manager</u>

The District will use a Construction Manager on the Project that is the subject of this Contract. Innovative Construction Services, Inc. (ICS) is the Construction Manager for this Project.

9. <u>Program Manager</u>

Chris Ralston is the Program Manager designated for the Project that is the subject of this Contract.

10. <u>Federal Funds - Wages</u>

As this Project is funded in whole or in part by federal funds, Contractor and all Subcontractors are subject to civil or criminal prosecution for any violation of the federal False Claims Act set forth under section 1001 of title 18 and section 231 of title 31 of the United States Code.

The following provisions are added as Section 27 of the General Conditions:

XXVII. <u>FEDERAL LABOR, WAGE & HOUR, APPRENTICE, AND RELATED</u> <u>PROVISIONS</u>

A. Minimum Wages

The Davis-Bacon Act and 29 CFR parts 1 through 7 shall apply if the Project is financed in whole or in part from Federal funds or in accordance with guarantees of a Federal agency or financed from funds obtained by pledge of any contract of a Federal agency to make a loan, grant or annual contribution.

10.1.1 All laborers and mechanics employed or working upon the Site of the Work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the Project), will be paid unconditionally and not less often than once a week, and without subsequent deduction or rebate on any account, except such payroll deductions as are permitted by regulations issued by the Secretary of Labor under the Copeland Act (29 CFR part 3), the full amount of wages and bona fide fringe benefits, or cash equivalents thereof, due at time of payment computed at rates not less than those contained in the applicable wage determination of the Secretary of Labor regardless of any contractual relationship which may be alleged to exist between the Contractor and such laborers and mechanics.

Contributions made or costs reasonably anticipated for bona fide fringe benefits under section 1(b)(2) of the Davis-Bacon Act on behalf of laborers or mechanics are considered wages paid to such laborers or mechanics, subject to the provisions of this section, including but not limited to paragraph 27.1.7; also, regular contributions made or costs incurred for more than a weekly period, but not less often than quarterly, under plans, funds, or programs which cover the particular weekly period, are deemed to be constructively made or incurred during such weekly period. Such laborers and mechanics shall be paid the appropriate wage rate and fringe benefits on the wage determination for the classification of Work actually performed, without regard to skill, except as provided in 29 CFR 5.5(a)(4). Laborers or mechanics performing Work in more than one classification may be compensated at the rate specified for each classification for the time actually worked therein: Provided, that the employer's payroll records accurately set forth the time spent in each classification in which Work is performed. The wage determination including any additional classification and wage rates conformed under this section, including but not limited to paragraph 27.1.6 and the Davis-Bacon poster (WH-1321) shall be posted at all times by the Contractor and its Subcontractors at the Site of the Work in a prominent and accessible place where it can be easily seen by the workers.

10.1.2 Any class of laborers or mechanics, including helpers, and which is to be employed under the Contract which is not listed in the wage determination shall be classified in conformance with the wage determination. An additional classification

and wage rate and fringe benefits will not be approved unless when the following criteria have been met:

- a) The Work to be performed by the classification requested is not performed by a classification in the wage determination; and
- **10.1.2.1** The classification is utilized in the area by the construction industry; and
- **10.1.2.2** The proposed wage rate, including any bona fide fringe benefits, bears a reasonable relationship to the wage rates contained in the wage determination.
- **10.1.3** If the Contractor and the laborers and mechanics to be employed in the classification (if known), or their representatives, and the District agree on the classification and wage rate (including the amount designated for fringe benefits where appropriate), a report of the action taken shall be sent by the Contractor to the Administrator of the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, Washington, DC 20210.
- **10.1.4** In the event the Contractor, the laborers or mechanics to be employed in the classification or their representatives, and the District do not agree on the proposed classification and wage rate (including the amount designated for fringe benefits, where appropriate), the Contractor shall provide the questions, including the views of all interested parties and the recommendation of the District, to the District for the District's review and referral to the Administrator for determination.
- **10.1.5** The wage rate (including fringe benefits where appropriate) determined pursuant to this section, shall be paid to all workers performing Work in the classification under this Contract from the first day on which Work is performed in the classification.
- **10.1.6** Whenever the minimum wage rate prescribed in any applicable wage determination for a class of laborers or mechanics includes a fringe benefit which is not expressed as an hourly rate, Contractor shall either pay the benefit as stated in the wage determination or shall pay another bona fide fringe benefit or an hourly cash equivalent thereof.
- **10.1.7** If the Contractor does not make payments to a trustee or other third person, the Contractor may consider, as part of the wages of any laborer or mechanic, the amount of any costs reasonably anticipated in providing bona fide fringe benefits under a plan or program, provided that the Secretary of Labor has found, upon the written request of the Contractor, that the applicable standards of the Davis-Bacon Act have been met. If the Secretary of Labor so requires, the Contractor shall set aside in a separate account sufficient assets to meet obligations under the plan or program.
- **10.2** Withholding. District may, upon its own action or upon written request of an authorized representative of the Department of Labor, withhold or cause to be withheld from the Contractor under this Contract or any other Federal contract with the same Contractor, or any other federally-assisted contract subject to Davis-Bacon prevailing wage requirements, which is held by the same Contractor, so much of the accrued payments or advances as may be considered necessary to pay laborers and

mechanics, including apprentices, trainees, and helpers, employed by the Contractor or any Subcontractor the full amount of wages required by the Contract. In the event of Contractor's or any Subcontractors' failure to pay any laborer or mechanic, including any apprentice, trainee, or helper, employed or working on the Site of the Work (or under the United States Housing Act of 1937 or under the Housing Act of 1949 in the construction or development of the project), all or part of the wages required by the Contract, the District may, after written notice to the Contractor, sponsor, applicant, or owner, take such action as it deems necessary to cause the suspension of any further payment, advance, or guarantee of funds until such violations have ceased.

10.3 Payrolls and basic records.

- 10.3.1 Payrolls and basic records relating thereto shall be maintained by the Contractor during the course of the Work and preserved for a period of three years thereafter for all laborers and mechanics working at the Site of the Work (or under the United States Housing Act of 1937, or under the Housing Act of 1949, in the construction or development of the project). Such records shall contain the name, address, and social security number of each worker, his or her correct classification, hourly rates of wages paid (including rates of contributions or costs anticipated for bona fide fringe benefits or cash equivalents thereof of the types described in section 1(b)(2)(B) of the Davis-Bacon Act), daily and weekly number of hours worked, deductions made and actual wages paid. Whenever the Secretary of Labor has found under 29 CFR 5.5(a)(1)(iv) that the wages of any laborer or mechanic include the amount of any costs reasonably anticipated in providing benefits under a plan or program described in section 1(b)(2)(B) of the Davis-Bacon Act, the Contractor shall maintain records that show that the commitment to provide such benefits is enforceable, that the plan or program is financially responsible, and that the plan or program has been communicated in writing to the laborers or mechanics affected, and records which show the costs anticipated or the actual cost incurred in providing such benefits. Contractors employing apprentices or trainees under approved programs shall maintain written evidence of the registration of apprenticeship programs and certification of trainee programs, the registration of the apprentices and trainees, and the ratios and wage rates prescribed in the applicable programs.
- The Contractor shall submit weekly for each week in which any 10.3.2 Contract Work is performed a copy of all payrolls to the District. The payrolls submitted shall set out accurately and completely all of the information required to be maintained under 29 CFR 5.5(a)(3)(i), except that full social security numbers and home addresses shall not be included on weekly transmittals. Instead the payrolls shall only need to include an individually identifying number for each employee (e.g., the last four digits of the employee's social security number). The required weekly payroll information shall be submitted on a form acceptable to the District. Optional Form WH-347 is available for this purpose from the Wage and Hour Division Web site at https://www.dol.gov/whd/programs/dbra/wh347.htm or its successor site. Contractor is responsible for the submission of copies of payrolls by all Subcontractors. Contractor and Subcontractors shall maintain the full social security number and current address of each covered worker, and shall provide them upon request to the District, the Contractor, or the Wage and Hour Division of the Department of Labor for purposes of an investigation or audit of compliance with prevailing wage requirements. Contractor may require a Subcontractor to provide addresses and social security numbers to the Contractor for its own records, without weekly submission to the District or other government agency

- **10.3.3** Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the Contractor or Subcontractor or his or her agent who pays or supervises the payment of the persons employed under the Contract and shall certify the following:
 - **10.3.3.1** That the payroll for the payroll period contains the information required to be provided under 29 CFR 5.5 (a)(3)(ii) of Regulations, 29 CFR part 5,
 - **10.3.3.2** That the appropriate information is being maintained under 29 CFR 5.5 (a)(3)(i) of Regulations, 29 CFR part 5, and
 - **10.3.3.3** That such information is correct and complete;
 - **10.3.3.4** That each laborer or mechanic (including each helper, apprentice, and trainee) employed on the Contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and
 - **10.3.3.5** That no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations, 29 CFR part 3;
 - **10.3.3.6** That each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of Work performed, as specified in the applicable wage determination incorporated into or applicable to the Contract.
 - **10.3.3.7** The weekly submission of a properly executed certification in the form set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph 27.3.3 of this section.
 - **10.3.3.8** The falsification of any of the above certifications may subject the Contractor or one or more Subcontractors to civil or criminal prosecution under section 1001 of title 18 and section 231 of title 31 of the United States Code.
 - **10.3.3.9** The Contractor or Subcontractor shall make the records required under this section available for inspection, copying, or transcription by authorized representatives of the District or the federal Department of Labor, and shall permit representatives to interview employees during working hours on the job. If the Contractor or Subcontractor fails to submit the required records or to make them available, the Federal agency may, after written notice to the Contractor, sponsor, applicant, or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

10.4 Apprentices and trainees

10.4.1 Apprentices. Apprentices will be permitted to work at less than the predetermined rate for the Work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Office of

Apprenticeship Training, Employer and Labor Services, or with a State Apprenticeship Agency recognized by the Office, or if a person is employed in his or her first ninety (90) days of probationary employment as an apprentice in an eligible apprenticeship program, who is not individually registered in the program, but who has been certified by the Office of Apprenticeship Training, Employer and Labor Services or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job Site in any craft classification shall not be greater than the ratio permitted to the Contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of Work actually performed. In addition, any apprentice performing Work on the job Site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the Work actually performed. Where a Contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the Contractor's or Subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Office of Apprenticeship Training, Employer and Labor Services, or a State Apprenticeship Agency recognized by the Office, withdraws approval of an apprenticeship program, the Contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the Work performed until an acceptable program is approved.

Trainees. Except as provided in 29 CFR 5.16, trainees will not be 10.4.2 permitted to Work at less than the predetermined rate for the Work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job Site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination which provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate who is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of Work actually performed. In addition, any trainee performing Work on the job Site in excess of the

ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the Work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the Contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the Work performed until an acceptable program is approved.

- **10.4.3 Equal employment opportunity.** The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR part 30.
- **10.5** Compliance with Copeland Act requirements. Contractor shall comply with the requirements of 29 CFR part 3, which are incorporated by reference in this Contract.
- **10.6** Subcontracts. The Contractor or Subcontractor shall insert in any subcontracts the clauses contained in 29 CFR 5.5(a)(1) through (10) and such other clauses as the Federal agency may by appropriate instructions require, and also a clause requiring the Subcontractors to include these clauses in any lower tier subcontracts. The Contractor shall be responsible for the compliance by any Subcontractor or lower tier Subcontractor with all the Contract clauses in 29 CFR 5.5.
- **10.7** Contract termination: debarment. A breach of the Contract clauses in 29 CFR 5.5 may be grounds for termination of the Contract, and for debarment as a Contractor and a Subcontractor as provided in 29 CFR 5.12.
- **10.8** Compliance with Davis-Bacon and Related Act requirements. All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR parts 1, 3, and 5 are herein incorporated by reference in this Contract.
- **10.9** Disputes concerning labor standards. Disputes arising out of the labor standards provisions of this Contract shall not be subject to the general disputes clause of this Contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the Contractor (or any of its Subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10.10 Certification of eligibility.

- **10.10.1** By entering into this Contract, the Contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the Contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- **10.10.2** No part of this Contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).
- **10.10.3** Contractor shall be subject to the penalty for making false statements prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

10.11 <u>Clauses Mandated by Contract Work Hours and Safety Standards</u> <u>Act.</u>

As used in the following paragraphs, the terms laborers and mechanics include watchmen and guards.

- **10.11.1 Overtime requirements.** No Contractor or Subcontractor contracting for any part of the Contract Work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic in any workweek in which he or she is employed on such Work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.
- **10.11.2 Violation; liability for unpaid wages; liquidated damages.** In the event of any violation of the clause set forth in the foregoing paragraph the Contractor and any Subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such Contractor and Subcontractor shall be liable to the United States for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the foregoing paragraph, in the sum of \$10 for each calendar day on which such individual was required or permitted to Work in excess of the standard workweek of forty hours without payment of the overtime wages required by the foregoing paragraph.
- 10.11.3 Withholding for unpaid wages and liquidated damages. The District may upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any moneys payable on account of Work performed by the Contractor or Subcontractor under the Contract or any other Federal contract with the same Contractor, or any other federally-assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same Contractor, such sums as may be determined to be necessary to satisfy any liabilities of such Contractor or Subcontractor for unpaid wages and liquidated damages as provided in the forgoing paragraph.
- **10.11.4 Subcontracts.** The Contractor or Subcontractor shall insert in any subcontracts the foregoing paragraphs concerning "Overtime requirements" and "Violation; liability for unpaid wages; liquidated damages" and also a clause requiring each Subcontractor to include these clauses in any lower tier subcontracts. Contractor shall be responsible for compliance by any Subcontractor or lower tier Subcontractor with the clauses set forth in paragraphs 27.11.1 through 27.11.4 of this section.

11. Federal Funds – Debarment

As this Project is funded in whole or in part by federal funds, the following provision is added as Section 6.1.5 of the General Conditions:

This Project uses or may plan to use federal funds. Consequently, Contractor is required to provide a signed "Federal Debarment" certification with its bid. This certification is required by the regulation implementing Executive Order 12549, Debarment and Suspension, 29 CFR Part 89, Section 98.510, Participants;

responsibilities. The regulations were published as Part of VII of the May 26, 1988 Federal Register (pages 19160-19211).

12. <u>Federal Funds – Byrd Anti-Lobbying</u>

As this Project is funded in whole or in part by federal funds, the following provision is added as Section 6.1.7 of the General Conditions:

If the contract exceeds \$100,000, Contractor is required to provide a signed "Byrd Anti-Lobbying" certification with its bid ((31 U.S.C. 1352) (Appendix II to 2 CFR, Part 200)).

13. Federal Funds - Procurement of recovered materials

As this Project is funded in whole or in part by federal funds, the following provision is added as Section 6.13.5 of the General Conditions:

Contractor must comply with section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act. The requirements of Section 6002 include procuring only items designated in guidelines of the Environmental Protection Agency (EPA) at 40 CFR part 247 that contain the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition, where the purchase price of the item exceeds \$10,000 or the value of the quantity acquired during the preceding fiscal year exceeded \$10,000; procuring solid waste management services in a manner that maximizes energy and resource recovery; and establishing an affirmative procurement program for procurement of recovered materials identified in the EPA quidelines.

14. <u>Federal Funds - Domestic preferences for procurements</u>

As this Project is funded in whole or in part by a federal grant made after November 12, 2020, the following provision is added as Section 1.8.10 of the General Conditions:

- **1.8.10** As appropriate and to the extent consistent with law, Contractor should, to the greatest extent practicable for the Project, provide a preference for the purchase, acquisition, or use of goods, products, or materials produced in the United States (including but not limited to iron, aluminum, steel, cement, and other manufactured products). The requirements of this section must be included in all subcontracts and purchase orders for work or products for the Project.
 - **1.8.10.1** "Produced in the United States" means, for iron and steel products, that all manufacturing processes, from the initial melting stage through the application of coatings, occurred in the United States.
 - **1.8.10.2** "Manufactured products" means items and construction materials composed in whole or in part of non-ferrous metals such as aluminum; plastics and polymer-based products such as polyvinyl chloride pipe; aggregates such as concrete; glass, including optical fiber; and lumber.

15. Preliminary Schedule of Values

The preliminary schedule of values shall include, at a minimum, the following information and the following structure:

Replace Section 10.1.1.2.3 in the General Conditions with the following provisions:

- **10.1.1.2.3** The preliminary schedule of values shall not provide for values any greater than the following percentages of the Contract value:
 - **10.1.1.2.3.1** Mobilization and layout combined to equal not more than [2]%;
 - **10.1.1.2.3.2** Submittals, samples and shop drawings combined to equal not more than **[4]**%;
 - **10.1.1.2.3.3** Bonds and insurance combined to equal not more than [2.5]%.
 - **10.1.1.2.3.4** Closeout documentation shall have a value in the preliminary schedule of not less than **[10]**%.

16. <u>COVID-19 Safety Requirements</u>

Contractor shall, at its cost, timely comply with all applicable federal, State, and local requirements relating to COVID-19 or other public health emergency/epidemic/pandemic. Further, except to the extent the Order provides otherwise, Contractor and Contractor's personnel, subcontractors and suppliers shall continue to comply with all applicable terms in the California Department of Public Health's State Public Health Officer Orders.

17. <u>COVID-19 Vaccination/Testing Requirements</u>

Vaccination Requirements

Contractor shall fill out, sign, date and submit to District the COVID-19 Vaccination/Testing Certification Form, attached hereto as **Attachment "A."**

According to the August 11, 2021, California Department of Public Health ("CDPH") State Public Health Officer Order ("Order"), a person is "fully vaccinated" for COVID-19 if two weeks or more have passed since they have received the second dose in a 2-dose series (Pfizer-BioNTech or Moderna or vaccine authorized by the World Health Organization), or two weeks or more have passed since they received a single-dose vaccine (Johnson and Johnson[J&J]/Janssen).

Pursuant to the CDPH Guidance for Vaccine Records Guidelines & Standards, Contractor shall only accept the following as proof of vaccination:

- (a) COVID-19 Vaccination Record Card (issued by the Department of Health and Human Services Centers for Disease Control & Prevention or WHO Yellow Card which includes name of person vaccinated, type of vaccine provided and date last dose administered);
 - a photo of a Vaccination Record Card as a separate document;

- (c) a photo of a Vaccination Record Card stored on a phone or electronic device;
- (d) documentation of COVID-19 vaccination from a health care provider;
- (e) digital record that includes a QR code that when scanned by a SMART Health Card reader displays to the reader name, date of birth, vaccine dates and vaccine type; or
- (f) documentation of vaccination from other contracted employers who follow these vaccination records guidelines and standards.

In the absence of knowledge to the contrary, Contractor may accept the documentation presented in (a) through (f) above as valid.

Contractor shall have a plan in place for tracking verified Contractor personnel vaccination status. Records of vaccination verification must be made available, upon request, to the local health jurisdiction for purposes of case investigation.

Contractor personnel, including any and all tiers of subcontractor, supplier, and any other personnel entering the Project site, who are not fully vaccinated, or for whom vaccine status is unknown or documentation is not provided, must be considered unvaccinated.

Weekly Testing Requirements

Contractor shall ensure that Contractor personnel, including any and all tiers of subcontractor, supplier, and any other worker entering the Project site, who are unvaccinated or who are not fully vaccinated are required to undergo diagnostic screening testing, as specified below:

- (a) Contractor personnel may be tested with either antigen or molecular tests to satisfy this requirement, but unvaccinated or incompletely vaccinated workers must be tested at least once weekly with either PCR testing or antigen testing. Any PCR (molecular) or antigen test used must either have Emergency Use Authorization by the U.S. Food and Drug Administration or be operating per the Laboratory Developed Test requirements by the U.S. Centers for Medicare and Medicaid Services.
- (b) Unvaccinated or not fully vaccinated Contractor personnel must also observe all other infection control requirements, and are not exempted from the testing requirement even if they have a medical contraindication to vaccination, since they are still potentially able to spread the illness. Previous history of COVID-19 from which the individual recovered more than 90 days earlier, or a previous positive antibody test for COVID-19, do not waive this requirement for testing.

Contractor shall have a plan in place for tracking test results and conducting workplace contact tracing, and must report results to local public health departments, if applicable.

[ATTACHMENT "A" ON NEXT PAGE]

ATTACHMENT "A" COVID-19 VACCINATION/TESTING CERTIFICATION

Contract	or:							
2021, Orkindergar of all K-1 such school	ornia Department of der ("Order"), that ten through grade to 2 school workers, e ools are required to agnostic testing.	all public and priv welve, unless exer ffective October 1	vate schools s npt, are requir 5, 2021. Furt	serving stored to ver ther, purs	udents ify the uant to	in train vaccing the O	nsitio e sta rder	onal atus , all
In light of	f these CDPH require	ements, Contractor	certifies that	the follow	ing er	ntity:		
has verifi	ed that the Contract	or personnel provi	ding services a	at District	's Proj	ect site((s):	_
	Have all been fully vaccinated in accordance with the CDPH Order.							
	Have not all been fully vaccinated, but those who are unvaccinated or not fully vaccinated undergo weekly diagnostic testing in accordance with the CDPH Order.							
	Have not been fully vaccinated and do not undergo weekly diagnostic testing in accordance with the CDPH Order.							
Order's C Personnel treated as	or understands that COVID-19 requireme I who are not fully s unvaccinated, and local laws for vaccir	nts for fully vacci vaccinated or dec Contractor will co	nated personr line to state t nply with the	nel or unv cheir vacc CDPH Ord	accina inatior	ated pe n status	rson wil	nel. I be
<u>CERTIFI</u>	CATION							
I,		, cert	ify that I am (Contracto	-′s			
	I have made a ations made herein.	diligent effort to	ascertain th	he facts	with	regard	to	the
Date:								
Proper Na	ame of Contractor:							
Signature	e:							
Print Nam	ie:							
Title:								

END OF DOCUMENT

DOCUMENT 00 73 56

HAZARDOUS MATERIALS PROCEDURES & REQUIREMENTS

1. Summary

This document includes information applicable to hazardous materials and hazardous waste abatement.

- 2. Notice of Hazardous Waste or Materials
 - a. Contractor shall give notice in writing to the District, the Construction Manager, and the Architect promptly, before any of the following materials are disturbed, and in no event later than twenty-four (24) hours after first observance, of any:
 - (1) Material that Contractor believes may be a material that is hazardous waste or hazardous material, as defined in section 25117 of the Health and Safety Code, that is required to be removed to a Class I, Class II, or Class III disposal site in accordance with provisions of existing law;
 - (2) Other material that may present a substantial danger to persons or property exposed thereto in connection with Work at the site.
 - b. Contractor's written notice shall indicate whether the hazardous waste or material was shown or indicated in the Contract Documents to be within the scope of Work, and whether the materials were brought to the site by Contractor, its Subcontractors, suppliers, or anyone else for whom Contractor is responsible. As used in this section the term "hazardous materials" shall include, without limitation, asbestos, lead, Polychlorinated biphenyl (PCB), petroleum and related hydrocarbons, and radioactive material.
 - c. In response to Contractor's written notice, the District shall investigate the identified conditions.
 - d. If the District determines that conditions do not involve hazardous materials or that no change in terms of Contract is justified, the District shall so notify Contractor in writing, stating reasons. If the District and Contractor cannot agree on whether conditions justify an adjustment in Contract Price or Contract Time, or on the extent of any adjustment, Contractor shall proceed with the Work as directed by the District.
 - e. If after receipt of notice from the District, Contractor does not agree to resume Work based on a reasonable belief it is unsafe, or does not agree to resume Work under special conditions, then District may order such portion of Work that is in connection with such hazardous condition or such affected area to be deleted from the Work, or performed by others, or District may invoke its rights to terminate the Contract in whole or in part. District will determine entitlement to or the amount or extent of an adjustment, if any, in Contract Price or Contract Time as a result of deleting such portion of Work, or performing the Work by others.

f. If Contractor stops Work in connection with any hazardous condition and in any area affected thereby, Contractor shall immediately redeploy its workers, equipment, and materials, as necessary, to other portions of the Work to minimize delay and disruption.

3. Additional Warranties and Representations

- a. Contractor represents and warrants that it, its employees, and its subcontractors and their employees, shall at all times have the required levels of familiarity with the Site and the Work, training, and ability to comply fully with all applicable laws and contractual requirements for safe and expeditious performance of the Work, including whatever training is or may be required regarding the activities to be performed (including, but not limited to, all training required to address adequately the actual or potential dangers of Contract performance).
- b. Contractor represents and warrants that it, its employees, and its subcontractors and their employees, shall at all times have and maintain in good standing any and all certifications and licenses required by applicable federal, state, and other governmental and quasi-governmental requirements applicable to the Work.
- c. Contractor represents and warrants that it has studied carefully all requirements of the Specifications regarding procedures for demolition, hazardous waste abatement, or safety practices, specified in the Contract, and prior to submitting its bid, has either (a) verified to its satisfaction that the specified procedures are adequate and sufficient to achieve the results intended by the Contract Documents, or (b) by way of approved "or equal" request or request for clarification and written Addenda, secured changes to the specified procedures sufficient to achieve the results intended by the Contract Documents. Contractor accepts the risk that any specified procedure will result in a completed Project in full compliance with the Contract Documents.

4. Monitoring and Testing

- a. District reserves the right, in its sole discretion, to conduct air monitoring, earth monitoring, Work monitoring, and any other tests (in addition to testing required under the agreement or applicable law), to monitor Contract requirements of safe and statutorily compliant work methods and (where applicable) safe re-entry level air standards under state and federal law upon completion of the job, and compliance of the work with periodic and final inspection by public and quasi-public entities having jurisdiction.
- b. Contractor acknowledges that District has the right to perform, or cause to be performed, various activities and tests including, but not limited to, preabatement, during abatement, and post-abatement air monitoring, that District shall have no obligation to perform said activities and tests, and that a portion of said activities and tests may take place prior to the completion of the Work by Contractor. In the event District elects to perform these activities and tests, Contractor shall afford District ample access to the Site and all areas of the Work as may be necessary for the performance of these activities and tests. Contractor will include the potential impact of these

- activities or tests by District in the Contract Price and the Scheduled Completion Date.
- c. Notwithstanding District's rights granted by this paragraph, Contractor may retain its own industrial hygiene consultant at Contractor's own expense and may collect samples and may perform tests including, but not limited to, preabatement, during abatement, and post-abatement personal air monitoring, and District reserves the right to request documentation of all such activities and tests performed by Contractor relating to the Work and Contractor shall immediately provide that documentation upon request.

5. Compliance with Laws

- a. Contractor shall perform safe, expeditious, and orderly work in accordance with the best practices and the highest standards in the hazardous waste abatement, removal, and disposal industry, the applicable law, and the Contract Documents, including, but not limited to, all responsibilities relating to the preparation and return of waste shipment records, all requirements of the law, delivering of all requisite notices, and obtaining all necessary governmental and quasi-governmental approvals.
- b. Contractor represents that it is familiar with and shall comply with all laws applicable to the Work or completed Work including, but not limited to, all federal, state, and local laws, statutes, standards, rules, regulations, and ordinances applicable to the Work relating to:
 - (1) The protection of the public health, welfare and environment;
 - (2) Storage, handling, or use of asbestos, PCB, lead, petroleum based products, radioactive material, or other hazardous materials;
 - (3) The generation, processing, treatment, storage, transport, disposal, destruction, or other management of asbestos, PCB, lead, petroleum, radioactive material, or hazardous waste materials or other waste materials of any kind; and
 - (4) The protection of environmentally sensitive areas such as wetlands and coastal areas.

6. Disposal

- a. Contractor has the sole responsibility for determining current waste storage, handling, transportation, and disposal regulations for the job Site and for each waste disposal facility. Contractor must comply fully at its sole cost and expense with these regulations and any applicable law. District may, but is not obligated to, require submittals with this information for it to review consistent with the Contract Documents.
- Contractor shall develop and implement a system acceptable to District to track hazardous waste from the Site to disposal, including appropriate "Hazardous Waste Manifests" on the EPA form, so that District may track the volume of waste it put in each landfill and receive from each landfill a certificate of receipt.

c. Contractor shall provide District with the name and address of each waste disposal facility prior to any disposal, and District shall have the express right to reject any proposed disposal facility. Contractor shall not use any disposal facility to which District has objected. Contractor shall document actual disposal or destruction of waste at a designated facility by completing a disposal certificate or certificate of destruction forwarding the original to the District.

7. Permits

- a. Before performing any of the Work, and at such other times as may be required by applicable law, Contractor shall deliver all requisite notices and obtain the approval of all governmental and quasi-governmental authorities having jurisdiction over the Work. Contractor shall submit evidence satisfactory to District that it and any disposal facility:
 - (1) have obtained all required permits, approvals, and the like in a timely manner both prior to commencement of the Work and thereafter as and when required by applicable law; and
 - (2) are in compliance with all such permits, approvals and the regulations.
 - For example, before commencing any work in connection with the Work involving asbestos-containing materials, or PCBs, or other hazardous materials subject to regulation, Contractor agrees to provide the required notice of intent to renovate or demolish to the appropriate state or federal agency having jurisdiction, by certified mail, return receipt requested, or by some other method of transmittal for which a return receipt is obtained, and to send a copy of that notice to District. Contractor shall not conduct any Work involving asbestos-containing materials or PCBs unless Contractor has first confirmed that the appropriate agency having jurisdiction is in receipt of the required notification. All permits, licenses, and bonds that are required by governmental or quasi-governmental authorities, and all fees, deposits, tap fees, offsite easements, and asbestos and PCB disposal facilities expenses necessary for the prosecution of the Work, shall be procured and paid for by Contractor. Contractor shall give all notices and comply with the all applicable laws bearing on the conduct of the Work as drawn and specified. If Contractor observes or reasonably should have observed that Plans and Specifications and other Contract Documents are at variance therewith, it shall be responsible for promptly notifying District in writing of such fact. If Contractor performs any Work contrary to applicable laws, it shall bear all costs arising therefrom.
- b. In the case of any permits or notices held in District's name or of necessity to be made in District's name, District shall cooperate with Contractor in securing the permit or giving the notice, but the Contractor shall prepare for District review and execution upon approval, all necessary applications, notices, and other materials.

8. Indemnification

To the fullest extent permitted by law, the indemnities and limitations of liability expressed throughout the Contract Documents apply with equal force and effect to any claims or liabilities imposed or existing by virtue of the removal, abatement, and disposal of hazardous waste. This includes, but is not limited to, liabilities connected to the selection and use of a waste disposal facility, a waste transporter, personal injury, property damage, loss of use of property, damage to the environment or natural resources, or "disposal" and "release" of materials associated with the Work (as defined in 42 U.S.C. § 960l et seq.).

9. Termination

District shall have an absolute right to terminate for default immediately without notice and without an opportunity to cure should Contractor knowingly or recklessly commit a material breach of the terms of the Contract Documents, or any applicable law, on any matter involving the exposure of persons or property to hazardous waste. However, if the breach of contract exposing persons or property to hazardous waste is due solely to an ordinary, unintentional, and non-reckless failure to exercise reasonable care, then the procedures for termination for cause shall apply without modification.

DOCUMENT 01 11 00

SUMMARY OF WORK

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Site Access Conditions and Requirements;
- B. Special Conditions.

1.02 SUMMARY OF WORK COVERED BY CONTRACT DOCUMENTS

A. The Work of this Contract consists of the following:

Selective demolition and construction necessary for the installation of PC shade structures, installation of shade structures, installation of concrete pads, upgrades to accessible paths of travel and restrooms and related site work, hazmat abatement (where required), electrical work and utility relocation and/or replacement.

1.03 CONTRACTS

A. Perform the Work under a single, fixed-price Contract.

1.04 WORK BY OTHERS

A. Work on the Project that will be performed and completed prior to the start of the Work of this Contract:

[FILL IN OR MODIFY AS APPROPRIATE]

- (1) Underground utility locating, surveying n/a.
- B. Work on the Project that will be performed by others concurrent with the Work of this Contract:
 - (1) N/A

1.05 CODES, REGULATIONS, AND STANDARDS

A. The codes, regulations, and standards adopted by the state and federal agencies having jurisdiction shall govern minimum requirements for this Project. Where codes, regulations, and standards conflict with the Contract Documents, these conflicts shall be brought to the immediate attention of the District and the Architect.

B. Codes, regulations, and standards shall be as published effective as of date of bid opening, unless otherwise specified or indicated.

1.06 PROJECT RECORD DOCUMENTS

- A. Contractor shall maintain on Site one set of the following record documents; Contractor shall record actual revisions to the Work:
 - (1) Contract Drawings.
 - (2) Specifications.
 - (3) Addenda.
 - (4) Change Orders and other modifications to the Contract.
 - (5) Reviewed shop drawings, product data, and samples.
 - (6) Field test records.
 - (7) Inspection certificates.
 - (8) Manufacturer's certificates.
- B. Contractor shall store Record Documents separate from documents used for construction. Provide files, racks, and secure storage for Record Documents and samples.
- C. Contractor shall record information concurrent with construction progress.
- D. Specifications: Contractor shall legibly mark and record at each product section of the Specifications the description of the actual product(s) installed, including the following:
 - (1) Manufacturer's name and product model and number.
 - (2) Product substitutions or alternates utilized.
 - (3) Changes made by Addenda and Change Orders and written directives.

1.07 EXAMINATION OF EXISTING CONDITIONS

- A. Contractor shall be held to have examined the Project Site and acquainted itself with the conditions of the Site and of the streets or roads approaching the Site.
- B. Prior to commencement of Work, Contractor shall survey the Site and existing buildings and improvements to observe existing damage and defects such as cracks, sags, broken, missing or damaged glazing, other building elements and Site improvements, and other damage.
- C. Should Contractor observe cracks, sags, and other damage to and defects of the Site and adjacent buildings, paving, and other items not indicated in the

Contract Documents, Contractor shall immediately report same to the District and the Architect.

1.08 CONTRACTOR'S USE OF PREMISES

- A. If unoccupied and only with District's prior written approval, Contractor may use the building(s) at the Project Site without limitation for its operations, storage, and office facilities for the performance of the Work. If the District chooses to beneficially occupy any building(s), Contractor must obtain the District's written approval for Contractor's use of spaces and types of operations to be performed within the building(s) while so occupied. Contractor's access to the building(s) shall be limited to the areas indicated.
- B. If the space at the Project Site is not sufficient for Contractor's operations, storage, office facilities and/or parking, Contractor shall arrange and pay for any additional facilities needed by Contractor.
- C. Contractor shall not interfere with use of or access to occupied portions of the building(s) or adjacent property.
- D. Contractor shall maintain corridors, stairs, halls, and other exit-ways of building clear and free of debris and obstructions at all times.
- E. No one other than those directly involved in the demolition and construction, or specifically designated by the District or the Architect shall be permitted in the areas of work during demolition and construction activities.
- F. The Contractor shall install the construction fence and maintain that it will be locked when not in use. Keys to this fencing will be provided to the District.

1.09 PROTECTION OF EXISTING STRUCTURES AND UTILITIES

- A. The Drawings show above-grade and below-grade structures, utility lines, and other installations that are known or believed to exist in the area of the Work. Contractor shall locate these existing installations before proceeding with excavation and other operations that could damage same; maintain them in service, where appropriate; and repair damage to them caused by the performance of the Work. Should damage occur to these existing installations, the costs of repair shall be at the Contractor's expense and made to the District's satisfaction.
- B. Contractor shall be alert to the possibility of the existence of additional structures and utilities. If Contractor encounters additional structures and utilities, Contractor will immediately report to the District for disposition of same as indicated in the General Conditions.

1.10 UTILITY SHUTDOWNS AND INTERRUPTIONS

A. Contractor shall give the District a minimum of three (3) days written notice in advance of any need to shut off existing utility services or to effect equipment interruptions. The District will set exact time and duration for shutdown, and will assist Contractor with shutdown. Work required to reestablish utility services shall be performed by the Contractor.

B. Contractor shall obtain District's written approval as indicated in the General Conditions in advance of deliveries of material or equipment or other activities that may conflict with District's use of the building(s) or adjacent facilities.

1.11 STRUCTURAL INTEGRITY

- A. Contractor shall be responsible for and supervise each operation and work that could affect structural integrity of various building elements, both permanent and temporary.
- B. Contractor shall include structural connections and fastenings as indicated or required for complete performance of the Work.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 21 00

ALLOWANCE

PART 1 GENERAL

1.1 SECTION INCLUDES

A. Non-specified work.

1.2 RELATED SECTIONS

- A. Document 01 11 00 (Summary of Work)
- B. Document 01 29 00 (Payments and Completion)
- C. Document 01 33 00 (Submittal Procedures)

1.3 ALLOWANCES

- A. Included in the Contract, a stipulated sum/price of **\$25,000.00** as an allowance for Unforeseen Conditions within the limits set forth in the Contract Documents. This Allowance shall not be utilized without written approval by the District.
- B. Contractor's costs, without overhead and profit, for products, delivery, installation, labor, insurance, payroll, taxes, bonding and equipment rental will be included in Allowance Expenditure Directive authorizing expenditure of funds from this Allowance. No overhead and profit shall be added to the Allowance Expenditure Directive.
- C. Funds will be drawn from Allowance only with District approval evidenced by an Allowance Expenditure Directive.
- D. At Contract closeout, funds remaining in Allowance will be credited to District by Change Order.
- E. Whenever costs are more than the Allowance, the amount covered by the Allowance will be approved at cost. The Contract Price shall be adjusted by Change Order for amounts in excess of the Allowance.

PART 2 PRODUCTS

Not used.

PART 3 EXECUTION

Not used.

DOCUMENT 01 22 00

ALTERNATES AND UNIT PRICING

PART 1 - ALTERNATES

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions;
- C. Bid Form and Proposal;
- D. Instruction to Bidders.

1.02 DESCRIPTION

The items of work indicated below propose modifications to, substitutions for, additions to and/or deletions from the various parts of the Work specified in other Sections of the Specifications. The acceptance or rejection of any of the alternates is strictly at the option of the District subject to District's acceptance of Contractor's stated prices contained in this Proposal.

1.03 GENERAL

Where an item is omitted, or scope of Work is decreased, all Work pertaining to the item whether specifically stated or not, shall be omitted and where an item is added or modified or where scope of Work is increased, all Work pertaining to that required to render same ready for use on the Project in accordance with intention of Drawings and Specifications shall be included in an agreed upon price amount.

1.04 BASE BID

The Base Bid includes all work required to construct the Project completely and in accordance with the Contract Documents.

1.05 ALTERNATES

- A. Bid Alt. #01 Asphalt repair, seal coat and striping.
- B. The above Alternate descriptions are general in nature and for reference purposes only. The Contract Documents, including, without limitation, the Drawings and Specifications, must be referred to for the complete scope of Work.

PART 2 - UNIT PRICING

2.01 GENERAL

Contractor shall completely state all required figures based on Unit Prices listed below. Where scope of Work is decreased, all Work pertaining to the item, whether specifically stated or not, shall be omitted and where scope of Work is increased, all work pertaining to that item required to render same ready for use on the Project in accordance with intention of Drawings and Specifications shall be included in an agreed upon price amount.

2.02 UNIT PRICES

Furnish unit prices for each of the named items on a square foot, lineal foot, or per each basis, as applies. Unit prices shall include all labor, materials, services, profit, overhead, insurance, bonds, taxes, and all other incidental costs of Contractor, subcontractors, and supplier(s).

A. Not used

DOCUMENT 01 26 00

CHANGES IN THE WORK

CONTRACTOR SHALL COMPLY WITH ALL APPLICABLE PROVISIONS IN THE AGREEMENT, GENERAL CONDITIONS, AND SPECIAL CONDITIONS, IF USED, RELATED TO CHANGES AND/OR REQUESTS FOR CHANGES.

DOCUMENT 01 29 00

APPLICATION FOR PAYMENT AND CONDITIONAL AND UNCONDITIONAL WAIVER AND RELEASE FORMS

CONTRACTOR SHALL COMPLY WITH ALL PROVISIONS IN THE GENERAL CONDITIONS RELATED TO APPLICATIONS FOR PAYMENT AND/OR PAYMENTS.

CONDITIONAL WAIVER AND RELEASE ON PROGRESS PAYMENT

(CIVIL CODE SECTION 8132)

NOTICE: THIS DOCUMENT WAIVES THE CLAIMANT'S LIEN, STOP PAYMENT NOTICE, AND PAYMENT BOND RIGHTS EFFECTIVE ON RECEIPT OF PAYMENT. A PERSON SHOULD NOT RELY ON THIS DOCUMENT UNLESS SATISFIED THAT THE CLAIMANT HAS RECEIVED PAYMENT.

ivallie of Cia	iiiidiit
Name of Cus	stomer:
Job Location	:
Owner:	
Through Dat	re:
Conditiona	l Waiver and Release
claimant has customer or or service pot that has been the claimant This document.	ent waives and releases lien, stop payment notice, and payment bond rights the s for labor and service provided, and equipment and material delivered, to the this job through the Through Date of this document. Rights based upon labor rovided, or equipment or material delivered, pursuant to a written change order en fully executed by the parties prior to the date that this document is signed by the waived and released by this document, unless listed as an Exception below. Lent is effective only on the claimant's receipt of payment from the financial in which the following check is drawn:
Maker of Ch	eck:
Amount of C	Check: \$
Check Payat	ple to:
Exceptions	
This docume	ent does not affect any of the following:
(1)	Retentions.
(2)	Extras for which the claimant has not received payment.
(3)	The following progress payments for which the claimant has previously given a conditional waiver and release but has not received payment:
Date(s) of w	vaiver and release:
Amount(s) c	of unpaid progress payment(s): \$

(•	Contract rights, including (A) a right based on rescission, abandonment, or breach of contract, and (B) the right to recover compensation for work not compensated by the payment.
Claimant's Signature:		
Claimant's Title:		
Date of Signature:		

UNCONDITIONAL WAIVER AND RELEASE ON PROGRESS PAYMENT

(CIVIL CODE SECTION 8134)

NOTICE TO CLAIMANT: THIS DOCUMENT WAIVES AND RELEASES LIEN, STOP PAYMENT NOTICE, AND PAYMENT BOND RIGHTS UNCONDITIONALLY AND STATES THAT YOU HAVE BEEN PAID FOR GIVING UP THOSE RIGHTS. THIS DOCUMENT IS ENFORCEABLE AGAINST YOU IF YOU SIGN IT, EVEN IF YOU HAVE NOT BEEN PAID. IF YOU HAVE NOT BEEN PAID, USE A CONDITIONAL WAIVER AND RELEASE FORM.

name of Clair	mant:
Name of Cust	comer:
Job Location:	
Owner:	
Through Date	2:
Uncondition	al Waiver and Release
claimant has customer on or service prothat has beer the claimant,	nt waives and releases lien, stop payment notice, and payment bond rights the for labor and service provided, and equipment and material delivered, to the this job through the Through Date of this document. Rights based upon labor ovided, or equipment or material delivered, pursuant to a written change order a fully executed by the parties prior to the date that this document is signed by are waived and released by this document, unless listed as an Exception below. has received the following progress payment: \$
Exceptions	
This documer	nt does not affect any of the following:
1.	Retentions.
(5)	Extras for which the claimant has not received payment.
(6)	Contract rights, including (A) a right based on rescission, abandonment, or breach of contract, and (B) the right to recover compensation for work not compensated by the payment.
Claimant's Si	gnature:
Claimant's Tit	tle:
Date of Signa	iture:

CONDITIONAL WAIVER AND RELEASE ON FINAL PAYMENT

(CIVIL CODE SECTION 8136)

NOTICE: THIS DOCUMENT WAIVES THE CLAIMANT'S LIEN, STOP PAYMENT NOTICE, AND PAYMENT BOND RIGHTS EFFECTIVE ON RECEIPT OF PAYMENT. A PERSON SHOULD NOT RELY ON THIS DOCUMENT UNLESS SATISFIED THAT THE CLAIMANT HAS RECEIVED PAYMENT.

Name of Claimant:
Name of Customer:
Job Location:
Owner:
Conditional Waiver and Release
This document waives and releases lien, stop payment notice, and payment bond rights the claimant has for labor and service provided, and equipment and material delivered, to the customer on this job. Rights based upon labor or service provided, or equipment or material delivered, pursuant to a written change order that has been fully executed by the parties prior to the date that this document is signed by the claimant, are waived and released by this document, unless listed as an Exception below. This document is effective only on the claimant's receipt of payment from the financial institution on which the following check is drawn:
Maker of Check:
Amount of Check: \$
Check Payable to:
Exceptions
This document does not affect any of the following:
Disputed claims for extras in the amount of: \$
Claimant's Signature:
Claimant's Title:
Date of Signature:

UNCONDITIONAL WAIVER AND RELEASE ON FINAL PAYMENT

(CIVIL CODE SECTION 8138)

NOTICE TO CLAIMANT: THIS DOCUMENT WAIVES AND RELEASES LIEN, STOP PAYMENT NOTICE, AND PAYMENT BOND RIGHTS UNCONDITIONALLY AND STATES THAT YOU HAVE BEEN PAID FOR GIVING UP THOSE RIGHTS. THIS DOCUMENT IS ENFORCEABLE AGAINST YOU IF YOU SIGN IT, EVEN IF YOU HAVE NOT BEEN PAID. IF YOU HAVE NOT BEEN PAID, USE A CONDITIONAL WAIVER AND RELEASE FORM.

Name of Claimant:

Name of Customer:
Job Location:
Owner:
Unconditional Waiver and Release
This document waives and releases lien, stop payment notice, and payment bond rights the claimant has for all labor and service provided, and equipment and material delivered, to the customer on this job. Rights based upon labor or service provided, or equipment or material delivered, pursuant to a written change order that has been fully executed by the parties prior to the date that this document is signed by the claimant, are waived and released by this document, unless listed as an Exception below. The claimant has been paid in full.
Exceptions
This document does not affect any of the following:
Disputed claims for extras in the amount of: \$
Claimant's Signature:
Claimant's Title:
Date of Signature:

DOCUMENT 01 31 19

PROJECT MEETINGS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions; and
- B. Special Conditions.

1.02 PROGRESS MEETINGS:

- A. Contractor shall schedule and hold regular weekly progress meetings after a minimum of one week's prior written notice of the meeting date and time to all Invitees as indicated below.
- B. Location: To be determined at Preconstruction meeting
- C. The Contractor shall notify and invite the following entities ("Invitees"):
 - (1) District Representative.
 - (2) Contractor.
 - (3) Contractor's Project Manager.
 - (4) Contractor's Superintendent.
 - (5) Subcontractors, as appropriate to the agenda of the meeting.
 - (6) Suppliers, as appropriate to the agenda of the meeting.
 - (7) Construction Manager, if any.
 - (8) Architect
 - (9) Engineer(s), if any and as appropriate to the agenda of the meeting.
 - (10) Others, as appropriate to the agenda of the meeting.
- D. The District's and/or the Architect's Consultants will attend at their discretion, in response to the agenda.
- E. The District representative, the Construction Manager, and/or another District Agent shall take and distribute meeting notes to attendees and other concerned parties. If exceptions are taken to anything in the meeting notes,

those exceptions shall be stated in writing to the District within five (5) working days following District's distribution of the meeting notes.

1.03 PRE-INSTALLATION/PERFORMANCE MEETING:

- A. Contractor shall schedule a meeting prior to the start of each of the following portions of the Work: cutting and patching of plaster and roofing, and other weather-exposed and moisture-resistant products. Contractor shall invite all Invitees to this meeting, and others whose work may affect or be affected by the guality of the cutting and patching work.
- B. Contractor shall review in detail prior to this meeting, the manufacturer's requirements and specifications, applicable portions of the Contract Documents, Shop Drawings, and other submittals, and other related work. At this meeting, invitees shall review and resolve conflicts, incompatibilities, or inadequacies discovered or anticipated.
- C. Contractor shall review in detail Project conditions, schedule, requirements for performance, application, installation, and quality of completed Work, and protection of adjacent Work and property.
- D. Contractor shall review in detail means of protecting the completed Work during the remainder of the construction period.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 32 13

SCHEDULING OF WORK

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions;
- C. Summary of Work; and
- D. Submittals.

1.02 SECTION INCLUDES

- A. Scheduling of Work under this Contract shall be performed by Contractor in accordance with requirements of this Section.
 - (1) Development of schedule, cost and resource loading of the schedule, monthly payment requests, and project status reporting requirements of the Contract shall employ computerized Critical Path Method ("CPM") scheduling ("CPM Schedule").
 - (2) CPM Schedule shall be cost loaded based on Schedule of Values as approved by District.
 - (3) Submit schedules and reports as specified in the General Conditions.
- B. Upon Award of Contract, Contractor shall immediately commence development of Initial and Original CPM Schedules to ensure compliance with CPM Schedule submittal requirements.

1.03 CONSTRUCTION SCHEDULE

- A. Within ten (10) days of issuance of the Notice to Proceed and before request for first progress payment, the Contractor shall prepare and submit to the Project Manager a construction progress schedule conforming to the Milestone Schedule below.
- B. The Construction Schedule shall be continuously updated, and an updated schedule shall be submitted with each application for progress payment. Each revised schedule shall indicate the work actually accomplished during the previous period and the schedule for completion of the remaining work.

C. Milestone Schedule:

Preliminary Construction Schedule

Anticipated Notice of Intent to Award (NOITA)	05/20/22
Anticipated Board Approval of Construction Contract	06/02/22
Anticipated Notice to Proceed (NTP)	06/03/22
Shop Drawings, Submittals, Materials Procurement	06/03/22 - 06/16/22

Site Construction Schedule

Last Day of 2021-2022 School	06/16/22
First Day of 2022-23 School	8/25/22
Mobilization and Start of Construction	06/17/22

Site-Adaption Construction Phase – Completion 8/20/22

Work prior to install of Shade Structures to include, but not limited to HAZMAT, Utilities, Electrical Rough-in, ADA improvements, concrete footings & pads

Site Adaptation Phase Punch & Corrective work	8/20/22 - 8/24/22
Milestone Completion Date of All Site Adaptation work	8/24/2022
Anticipated Shipments of OFCI Shade Structures	8/19/22 - 9/9/22

Start of OFCI Shade Structure Install Phase

Delivery Dates - TBD

Install timeframe of Each Structure: No more than 5 days unless given authorization by District.

Punch List, Corrective Work & Final Cleaning 10/15/22 – 10/30/22

FINAL PROJECT COMPLETION October 31, 2022

1.04 QUALIFICATIONS

- A. Contractor shall employ experienced scheduling personnel qualified to use the latest version of [i.e., Primavera Project Planner]. Experience level required is set forth below. Contractor may employ such personnel directly or may employ a consultant for this purpose.
 - (1) The written statement shall identify the individual who will perform CPM scheduling.
 - (2) Capability and experience shall be verified by description of construction projects on which individual has successfully applied computerized CPM.

- (3) Required level of experience shall include at least two (2) projects of similar nature and scope with value not less than three fourths (¾) of the Total Bid Price of this Project. The written statement shall provide contact persons for referenced projects with current telephone and address information.
- B. District reserves the right to approve or reject Contractor's scheduler or consultant at any time. District reserves the right to refuse replacing of Contractor's scheduler or consultant, if District believes replacement will negatively affect the scheduling of Work under this Contract.

1.05 GENERAL

- A. Progress Schedule shall be based on and incorporate milestone and completion dates specified in Contract Documents.
- B. Overall time of completion and time of completion for each milestone shown on Progress Schedule shall adhere to times in the Contract, unless an earlier (advanced) time of completion is requested by Contractor and agreed to by District. Any such agreement shall be formalized by a Change Order.
 - (1) District is not required to accept an early completion schedule, i.e., one that shows an earlier completion date than the Contract Time.
 - (2) Contractor shall not be entitled to extra compensation in event agreement is reached on an earlier completion schedule and Contractor completes its Work, for whatever reason, beyond completion date shown in its early completion schedule but within the Contract Time.
 - (3) A schedule showing the work completed in less than the Contract Time, and that has been accepted by District, shall be considered to have Project Float. The Project Float is the time between the scheduled completion of the work and the Completion Date. Project Float is a resource available to both District and the Contractor.
- C. Ownership Project Float: Neither the District nor Contractor owns Project Float. The Project owns the Project Float. As such, liability for delay of the Completion Date rests with the party whose actions, last in time, actually cause delay to the Completion Date.
 - (1) For example, if Party A uses some, but not all of the Project Float and Party B later uses remainder of the Project Float as well as additional time beyond the Project Float, Party B shall be liable for the time that represents a delay to the Completion Date.
 - Party A would not be responsible for the time since it did not consume the entire Project Float and additional Project Float remained; therefore, the Completion Date was unaffected by Party A.
- D. Progress Schedule shall be the basis for evaluating job progress, payment requests, and time extension requests. Responsibility for developing Contract

- CPM Schedule and monitoring actual progress as compared to Progress Schedule rests with Contractor.
- E. Failure of Progress Schedule to include any element of the Work, or any inaccuracy in Progress Schedule, will not relieve Contractor from responsibility for accomplishing the Work in accordance with the Contract. District's acceptance of schedule shall be for its use in monitoring and evaluating job progress, payment requests, and time extension requests and shall not, in any manner, impose a duty of care upon District, or act to relieve Contractor of its responsibility for means and methods of construction.
- F. Software: Microsoft Project. Such software shall be compatible with Windows operating system. Contractor shall transmit contract file to District on compact disk at times requested by District.
- G. Transmit each item under the form approved by District.
 - (1) Identify Project with District Contract number and name of Contractor.
 - (2) Provide space for Contractor's approval stamp and District's review stamps.
 - (3) Submittals received from sources other than Contractor will be returned to the Contractor without District's review.

1.06 INITIAL CPM SCHEDULE

- A. Initial CPM Schedule submitted for review at the pre-construction conference shall serve as Contractor's schedule for up to ninety (90) calendar days after the Notice to Proceed.
- B. Indicate detailed plan for the Work to be completed in first ninety (90) days of the Contract; details of planned mobilization of plant and equipment; sequence of early operations; procurement of materials and equipment. Show Work beyond ninety (90) calendar days in summary form.
- C. Initial CPM Schedule shall be time scaled.
- D. Initial CPM Schedule shall be cost and resource loaded. Accepted cost and resource loaded schedule will be used as basis for monthly progress payments until acceptance of the Original CPM Schedule. Use of Initial CPM Schedule for progress payments shall not exceed ninety (90) calendar days.
- E. District and Contractor shall meet to review and discuss the Initial CPM Schedule within seven (7) calendar days after it has been submitted to District.
 - (1) District's review and comment on the schedule shall be limited to Contract conformance (with sequencing, coordination, and milestone requirements).
 - (2) Contractor shall make corrections to schedule necessary to comply with Contract requirements and shall adjust schedule to incorporate

- any missing information requested by District. Contractor shall resubmit Initial CPM Schedule if requested by District.
- F. If, during the first ninety (90) days after Notice to Proceed, the Contractor is of the opinion that any of the Work included on its Initial CPM Schedule has been impacted, the Contractor shall submit to District a written Time Impact Evaluation ("TIE") in accordance with Article 1.12 of this Section. The TIE shall be based on the most current update of the Initial CPM Schedule.

1.07 ORIGINAL CPM SCHEDULE

- A. Submit a detailed proposed Original CPM Schedule presenting an orderly and realistic plan for completion of the Work in conformance with requirements as specified herein.
- B. Progress Schedule shall include or comply with following requirements:
 - (1) Time scaled, cost and resource (labor and major equipment) loaded CPM schedule.
 - (2) No activity on schedule shall have duration longer than fifteen (15) work days, with exception of submittal, approval, fabrication and procurement activities, unless otherwise approved by District.
 - (a) Activity durations shall be total number of actual work days required to perform that activity.
 - (3) The start and completion dates of all items of Work, their major components, and milestone completion dates, if any.
 - (4) District furnished materials and equipment, if any, identified as separate activities.
 - (5) Activities for maintaining Project Record Documents.
 - (6) Dependencies (or relationships) between activities.
 - (7) Processing/approval of submittals and shop drawings for all material and equipment required per the Contract. Activities that are dependent on submittal acceptance or material delivery shall not be scheduled to start earlier than expected acceptance or delivery dates.
 - (a) Include time for submittals, re-submittals and reviews by District. Coordinate with accepted schedule for submission of Shop Drawings, samples, and other submittals.
 - (b) Contractor shall be responsible for all impacts resulting from resubmittal of Shop Drawings and submittals.
 - (8) Procurement of major equipment, through receipt and inspection at jobsite, identified as separate activity.

- (a) Include time for fabrication and delivery of manufactured products for the Work.
- (b) Show dependencies between procurement and construction.
- (9) Activity description; what Work is to be accomplished and where.
- (10) The total cost of performing each activity shall be total of labor, material, and equipment, excluding overhead and profit of Contractor. Overhead and profit of the General Contractor shall be shown as a separate activity in the schedule. Sum of cost for all activities shall equal total Contract value.
- (11) Resources required (labor and major equipment) to perform each activity.
- (12) Responsibility code for each activity corresponding to Contractor or Subcontractor responsible for performing the Work.
- (13) Identify the activities which constitute the controlling operations or critical path. No more than twenty-five (25%) of the activities shall be critical or near critical. Near critical is defined as float in the range of one (1) to (10) days.
- (14) Twenty (20) workdays for developing punch list(s), completion of punch-list items, and final clean up for the Work or any designated portion thereof. No other activities shall be scheduled during this period.
- (15) Interface with the work of other contractors, District, and agencies such as, but not limited to, utility companies.
- (16) Show detailed Subcontractor Work activities. In addition, furnish copies of Subcontractor schedules upon which CPM was built.
 - (a) Also furnish for each Subcontractor, as determined by District, submitted on Subcontractor letterhead, a statement certifying that Subcontractor concurs with Contractor's Original CPM Schedule and that Subcontractor's related schedules have been incorporated, including activity duration, cost and resource loading.
 - (b) Subcontractor schedules shall be independently derived and not a copy of Contractor's schedule.
 - (c) In addition to Contractor's schedule and resource loading, obtain from electrical, mechanical, and plumbing Subcontractors, and other Subcontractors as required by District, productivity calculations common to their trades, such as units per person day, feet of pipe per day per person, feet of wiring per day per person, and similar information.

- (d) Furnish schedule for Contractor/Subcontractor CPM schedule meetings which shall be held prior to submission of Original CPM schedule to District. District shall be permitted to attend scheduled meetings as an observer.
- (17) Activity durations shall be in Work days.
- (18) Submit with the schedule a list of anticipated non-Work days, such as weekends and holidays. The Progress Schedule shall exclude in its Work day calendar all non-Work days on which Contractor anticipates critical Work will not be performed.
- C. Original CPM Schedule Review Meeting: Contractor shall, within sixty (60) days from the Notice to Proceed date, meet with District to review the Original CPM Schedule submittal.
 - (1) Contractor shall have its Project Manager, Project Superintendent, Project Scheduler, and key Subcontractor representatives, as required by District, in attendance. The meeting will take place over a continuous one (1) day period.
 - (2) District's review will be limited to submittal's conformance to Contract requirements including, but not limited to, coordination requirements. However, review may also include:
 - (a) Clarifications of Contract Requirements.
 - (b) Directions to include activities and information missing from submittal.
 - (c) Requests to Contractor to clarify its schedule.
 - (3) Within five (5) days of the Schedule Review Meeting, Contractor shall respond in writing to all questions and comments expressed by District at the Meeting.

1.08 ADJUSTMENTS TO CPM SCHEDULE

- A. Adjustments to Original CPM Schedule: Contractor shall have adjusted the Original CPM Schedule submittal to address all review comments from original CPM Schedule review meeting and resubmit network diagrams and reports for District's review.
 - (1) District, within ten (10) days from date that Contractor submitted the revised schedule, will either:
 - (a) Accept schedule and cost and resource loaded activities as submitted, or
 - (b) Advise Contractor in writing to review any part or parts of schedule which either do not meet Contract requirements or are unsatisfactory for District to monitor Project's progress,

resources, and status or evaluate monthly payment request by Contractor.

- (2) District may accept schedule with conditions that the first monthly CPM Schedule update be revised to correct deficiencies identified.
- (3) When schedule is accepted, it shall be considered the "Original CPM Schedule" which will then be immediately updated to reflect the current status of the work.
- (4) District reserves right to require Contractor to adjust, add to, or clarify any portion of schedule which may later be discovered to be insufficient for monitoring of Work or approval of partial payment requests. No additional compensation will be provided for such adjustments, additions, or clarifications.
- B. Acceptance of Contractor's schedule by District will be based solely upon schedule's compliance with Contract requirements.
 - (1) By way of Contractor assigning activity durations and proposing sequence of Work, Contractor agrees to utilize sufficient and necessary management and other resources to perform work in accordance with the schedule.
 - (2) Upon submittal of schedule update, updated schedule shall be considered "current" CPM Schedule.
 - (3) Submission of Contractor's schedule to District shall not relieve Contractor of total responsibility for scheduling, sequencing, and pursuing Work to comply with requirements of Contract Documents, including adverse effects such as delays resulting from ill-timed Work.
- C. Submittal of Original CPM Schedule, and subsequent schedule updates, shall be understood to be Contractor's representation that the Schedule meets requirements of Contract Documents and that Work shall be executed in sequence indicated on the schedule.
- D. Contractor shall distribute Original CPM Schedule to Subcontractors for review and written acceptance, which shall be noted on Subcontractors' letterheads to Contractor and transmitted to District for the record.

1.09 MONTHLY CPM SCHEDULE UPDATE SUBMITTALS

- A. Following acceptance of Contractor's Original CPM Schedule, Contractor shall monitor progress of Work and adjust schedule each month to reflect actual progress and any anticipated changes to planned activities.
 - (1) Each schedule update submitted shall be complete, including all information requested for the Original CPM Schedule submittal.
 - (2) Each update shall continue to show all Work activities including those already completed. These completed activities shall accurately reflect

"as built" information by indicating when activities were actually started and completed.

- B. A meeting will be held on approximately the twenty-fifth (25th) of each month to review the schedule update submittal and progress payment application.
 - (1) At this meeting, at a minimum, the following items will be reviewed: Percent (%) complete of each activity; Time Impact Evaluations for Change Orders and Time Extension Request; actual and anticipated activity sequence changes; actual and anticipated duration changes; and actual and anticipated Contractor delays.
 - (2) These meetings are considered a critical component of overall monthly schedule update submittal and Contractor shall have appropriate personnel attend. At a minimum, these meetings shall be attended by Contractor's General Superintendent and Scheduler.
 - (3) Contractor shall plan on the meeting taking no less than four (4) hours.
- C. Within five (5) working days after monthly schedule update meeting, Contractor shall submit the updated CPM Schedule update.
- D. Within five (5) work days of receipt of above noted revised submittals, District will either accept or reject monthly schedule update submittal.
 - (1) If accepted, percent (%) complete shown in monthly update will be basis for Application for Payment by the Contractor. The schedule update shall be submitted as part of the Contractor's Application for Payment.
 - (2) If rejected, update shall be corrected and resubmitted by Contractor before the Application for Payment is submitted.
- E. Neither updating, changing or revising of any report, curve, schedule, or narrative submitted to District by Contractor under this Contract, nor District's review or acceptance of any such report, curve, schedule or narrative shall have the effect of amending or modifying in any way the Completion Date or milestone dates or of modifying or limiting in any way Contractor's obligations under this Contract.

1.10 SCHEDULE REVISIONS

- A. Updating the Schedule to reflect actual progress shall not be considered revisions to the Schedule. Since scheduling is a dynamic process, revisions to activity durations and sequences are expected on a monthly basis.
- B. To reflect revisions to the Schedule, the Contractor shall provide District with a written narrative with a full description and reasons for each Work activity revised. For revisions affecting the sequence of work, the Contractor shall provide a schedule diagram which compares the original sequence to the revised sequence of work. The Contractor shall provide the written narrative

- and schedule diagram for revisions two (2) working days in advance of the monthly schedule update meeting.
- C. Schedule revisions shall not be incorporated into any schedule update until the revisions have been reviewed by District. District may request further information and justification for schedule revisions and Contractor shall, within three (3) days, provide District with a complete written narrative response to District's request.
- D. If the Contractor's revision is still not accepted by District, and the Contractor disagrees with District's position, the Contractor has seven (7) calendar days from receipt of District's letter rejecting the revision to provide a written narrative providing full justification and explanation for the revision. The Contractor's failure to respond in writing within seven (7) calendar days of District's written rejection of a schedule revision shall be contractually interpreted as acceptance of District's position, and the Contractor waives its rights to subsequently dispute or file a claim regarding District's position.
- E. At District's discretion, the Contractor can be required to provide Subcontractor certifications of performance regarding proposed schedule revisions affecting said Subcontractors.

1.11 RECOVERY SCHEDULE

- A. If the Schedule Update shows a completion date twenty-one (21) calendar days beyond the Contract Completion Date, or individual milestone completion dates, the Contractor shall submit to District the proposed revisions to recover the lost time within seven (7) calendar days. As part of this submittal, the Contractor shall provide a written narrative for each revision made to recapture the lost time. If the revisions include sequence changes, the Contractor shall provide a schedule diagram comparing the original sequence to the revised sequence of work.
- B. The revisions shall not be incorporated into any schedule update until the revisions have been reviewed by District.
- C. If the Contractor's revisions are not accepted by District, District and the Contractor shall follow the procedures in paragraph 1.09.C, 1.09.D and 1.09.E above.
- D. At District's discretion, the Contractor can be required to provide Subcontractor certifications for revisions affecting said Subcontractors.

1.12 TIME IMPACT EVALUATION ("TIE") FOR CHANGE ORDERS, AND OTHER DELAYS

A. When Contractor is directed to proceed with changed Work, the Contractor shall prepare and submit within fourteen (14) calendar days from the Notice to Proceed a TIE which includes both a written narrative and a schedule diagram depicting how the changed Work affects other schedule activities. The schedule diagram shall show how the Contractor proposes to incorporate the changed Work in the schedule and how it impacts the current schedule-update critical path. The Contractor is also responsible for requesting time

- extensions based on the TIE's impact on the critical path. The diagram must be tied to the main sequence of schedule activities to enable District to evaluate the impact of changed Work to the scheduled critical path.
- B. Contractor shall be required to comply with the requirements of Paragraph 1.09.A for all types of delays such as, but not limited to, Contractor/Subcontractor delays, adverse weather delays, strikes, procurement delays, fabrication delays, etc.
- C. Contractor shall be responsible for all costs associated with the preparation of TIEs, and the process of incorporating them into the current schedule update. The Contractor shall provide District with four (4) copies of each TIE.
- D. Once agreement has been reached on a TIE, the Contract Time will be adjusted accordingly. If agreement is not reached on a TIE, the Contract Time may be extended in an amount District allows, and the Contractor may submit a claim for additional time claimed by contractor.

1.13 TIME EXTENSIONS

- A. The Contractor is responsible for requesting time extensions for time impacts that, in the opinion of the Contractor, impact the critical path of the current schedule update. Notice of time impacts shall be given in accord with the General Conditions.
- B. Where an event for which District is responsible impacts the projected Completion Date, the Contractor shall provide a written mitigation plan, including a schedule diagram, which explains how (e.g., increase crew size, overtime, etc.) the impact can be mitigated. The Contractor shall also include a detailed cost breakdown of the labor, equipment, and material the Contractor would expend to mitigate District-caused time impact. The Contractor shall submit its mitigation plan to District within fourteen (14) calendar days from the date of discovery of the impact. The Contractor is responsible for the cost to prepare the mitigation plan.
- C. Failure to request time, provide TIE, or provide the required mitigation plan will result in Contractor waiving its right to a time extension and cost to mitigate the delay.
- D. No time will be granted under this Contract for cumulative effect of changes.
- E. District will not be obligated to consider any time extension request unless the Contractor complies with the requirements of Contract Documents.
- F. Failure of the Contractor to perform in accordance with the current schedule update shall not be excused by submittal of time extension requests.
- G. If the Contractor does not submit a TIE within the required fourteen (14) calendar days for any issue, it is mutually agreed that the Contractor does not require a time extension for said issue.

1.14 SCHEDULE REPORTS

A. Submit four (4) copies of the following reports with the Initial CPM Schedule, the Original CPM Schedule, and each monthly update.

B. Required Reports:

- (1) Two activity listing reports: one sorted by activity number and one by total Project Float. These reports shall also include each activity's early/late and actual start and finish dates, original and remaining duration, Project Float, responsibility code, and the logic relationship of activities.
- (2) Cost report sorted by activity number including each activity's associated cost, percentage of Work accomplished, earned value- to date, previous payments, and amount earned for current update period.
- (3) Schedule plots presenting time-scaled network diagram showing activities and their relationships with the controlling operations or critical path clearly highlighted.
- (4) Cash flow report calculated by early start, late start, and indicating actual progress. Provide an exhibit depicting this information in graphic form.
- (5) Planned versus actual resource (i.e., labor) histogram calculated by early start and late start.

C. Other Reports:

In addition to above reports, District may request, from month to month, any two of the following reports. Submit four (4) copies of all reports.

- (1) Activities by early start.
- (2) Activities by late start.
- (3) Activities grouped by Subcontractors or selected trades.
- (4) Activities with scheduled early start dates in a given time frame, such as fifteen (15) or thirty (30) day outlook.
- D. Furnish District with report files on compact disks containing all schedule files for each report generated.

1.15 PROJECT STATUS REPORTING

A. In addition to submittal requirements for CPM scheduling identified in this Section, Contractor shall provide a monthly project status report (i.e., written narrative report) to be submitted in conjunction with each CPM Schedule as specified herein. Status reporting shall be in form specified below.

- B. Contractor shall prepare monthly written narrative reports of status of Project for submission to District. Written status reports shall include:
 - (1) Status of major Project components (percent (%) complete, amount of time ahead or behind schedule) and an explanation of how Project will be brought back on schedule if delays have occurred.
 - (2) Progress made on critical activities indicated on CPM Schedule.
 - (3) Explanations for any lack of work on critical path activities planned to be performed during last month.
 - (4) Explanations for any schedule changes, including changes to logic or to activity durations.
 - (5) List of critical activities scheduled to be performed next month.
 - (6) Status of major material and equipment procurement.
 - (7) Any delays encountered during reporting period.
 - (8) Contractor shall provide printed report indicating actual versus planned resource loading for each trade and each activity. This report shall be provided on weekly and monthly basis.
 - (a) Actual resource shall be accumulated in field by Contractor, and shall be as noted on Contractor's daily reports. These reports will be basis for information provided in computer-generated monthly and weekly printed reports.
 - (b) Contractor shall explain all variances and mitigation measures.
 - (9) Contractor may include any other information pertinent to status of Project. Contractor shall include additional status information requested by District at no additional cost.
 - (10) Status reports, and the information contained therein, shall not be construed as claims, notice of claims, notice of delay, or requests for changes or compensation.

1.16 WEEKLY SCHEDULE REPORT

At the Weekly Progress Meeting, the Contractor shall provide and present a time-scaled three (3) week look-ahead schedule that is based and correlated by activity number to the current schedule (i.e., Initial, Original CPM, or Schedule Update).

1.17 DAILY CONSTRUCTION REPORTS

On a daily basis, Contractor shall submit a daily activity report to District for each workday, including weekends and holidays when worked. Contractor shall develop the daily construction reports on a computer-generated database capable of sorting daily Work, manpower, and man-hours by Contractor, Subcontractor, area, subarea, and Change Order Work. Upon request of District, furnish computer disk of this

data base. Obtain District's written approval of daily construction report data base format prior to implementation. Include in report:

- A. Project name and Project number.
- B. Contractor's name and address.
- C. Weather, temperature, and any unusual site conditions.
- D. Brief description and location of the day's scheduled activities and any special problems and accidents, including Work of Subcontractors. Descriptions shall be referenced to CPM scheduled activities.
- E. Worker quantities for its own Work force and for Subcontractors of any tier.
- F. Equipment, other than hand tools, utilized by Contractor and Subcontractors.

1.18 PERIODIC VERIFIED REPORTS

Contractor shall complete and verify construction reports on a form prescribed by the Division of the State Architect and file reports on the first day of February, May, August, and November during the preceding quarter year; at the completion of the Contract; at the completion of the Work; at the suspension of Work for a period of more than one (1) month; whenever the services of Contractor or any of Contractor's Subcontractors are terminated for any reason; and at any time a special verified report is required by the Division of the State Architect. Refer to section 4-336 and section 4-343 of Part 1, Title 24 of the California Code of Regulations.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 33 00

SUBMITTALS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Contractor's Submittals and Schedules, Drawings and Specifications;
- B. Special Conditions.

1.02 SECTION INCLUDES:

A. Definitions:

- (1) Shop Drawings and Product Data are as indicated in the General Conditions and include, but are not limited to, fabrication, erection, layout and setting drawings, formwork and falsework drawings, manufacturers' standard drawings, descriptive literature, catalogues, brochures, performance and test data, wiring and control diagrams. In addition, there are other drawings and descriptive data pertaining to materials, equipment, piping, duct and conduit systems, and methods of construction as may be required to show that the materials, equipment or systems and all positions conform to the requirement of the Contract Documents, including, without limitation, the Drawings.
- (2) "Manufactured" applies to standard units usually mass-produced; "fabricated" means specifically assembled or made out of selected materials to meet design requirements. Shop Drawings shall establish the actual detail of manufactured or fabricated items, indicated proper relation to adjoining work and amplify design details of mechanical and electrical equipment in proper relation to physical spaces in the structure.
- (3) Manufacturer's Instructions: Where any item of Work is required by the Contract Documents to be furnished, installed, or performed, at a minimum, in accordance with a specified product manufacturer's instructions, the Contractor shall procure and distribute copies of these to the District, the Architect, and all other concerned parties and shall furnish, install, or perform the work, at a minimum, in accordance with those instructions.

- B. Samples, Shop Drawings, Product Data, and other items as specified, in accordance with the following requirements:
 - (1) Contractor shall submit all Shop Drawings, Product Data, and Samples to the District, the Architect, the Project Inspector, and the Construction Manager.
 - (2) Contractor shall comply with all time frames herein and in the General Conditions and, in any case, shall submit required information in sufficient time to permit proper consideration and action before ordering any materials or items represented by such Shop Drawings, Product Data, and/or Samples.
 - (3) Contractor shall allow sufficient time so that no delay occurs due to required lead time in ordering or delivery of any item to the Site.

 Contractor shall be responsible for any delay in progress of Work due to its failure to observe these requirements.
 - (4) Time for completion of Work shall not be extended on account of Contractor's failure to promptly submit Shop Drawings, Product Data, and/or Samples.
 - (5) Reference numbers on Shop Drawings shall have Architectural and/or Engineering Contract Drawings reference numbers for details, sections, and "cuts" shown on Shop Drawings. These reference numbers shall be in addition to any numbering system that Contractor chooses to use or has adopted as standard.
 - (6) When the magnitude or complexity of submittal material prevents a complete review within the stated time frame, Contractor shall make this submittal in increments to avoid extended delays.
 - (7) Contractor shall certify on submittals for review that submittals conform to Contract requirements. Also certify that Contractor-furnished equipment can be installed in allocated space. In event of any variance, Contractor shall specifically state in transmittal and on Shop Drawings, portions vary and require approval of a substitute. Submittals shall not be used as a means of requesting a substitution.
 - (8) Unless specified otherwise, sampling, preparation of samples, and tests shall be in accordance with the latest standard of the American Society for Testing and Materials.
 - (9) Upon demand by Architect or District, Contractor shall submit samples of materials and/or articles for tests or examinations and consideration before Contractor incorporates same in Work. Contractor shall be solely responsible for delays due to sample(s) not being submitted in time to allow for tests. Acceptance or rejection will be expressed in writing. Work shall be equal to approved samples in every respect. Samples that are of value after testing will remain the property of Contractor.

C. Submittal Schedule:

- (1) Contractor shall prepare its proposed submittal schedule that is coordinated with the proposed construction schedule and submit both to the District within ten (10) days after the date of the Notice to Proceed. Contractor's proposed schedules shall become the Project Construction Schedule and the Project Submittal Schedule after each is approved by the District.
- (2) Contractor is responsible for all lost time should the initial submittal be rejected, marked "revise and resubmit", etc.
- (3) All Submittals shall be forwarded to the District by the date indicated on the approved Submittal Schedule, unless an earlier date is necessary to maintain the Construction Schedule, in which case those Submittals shall be forwarded to the District so as not to delay the Construction Schedule.
- (4) Contractor may be assessed \$100 a day for each day it is late in submitting a shop drawing or sample. No extensions of time will be granted to Trade Contractor or any Subcontractor because of its failure to have shop drawings and samples submitted in accordance with the Schedule.

1.03 SHOP DRAWINGS:

- A. Contractor shall submit one reproducible transparency and six (6) opaque reproductions. The District will review and return the reproducible copy and one (1) opaque reproduction to Contractor.
- B. Before commencing installation of any Work, the Contractor shall submit and receive approval of all drawings, descriptive data, and material list(s) as required to accomplish Work.
- C. Review of Shop Drawings is regarded as a service to assist Contractor and in all cases original Contract Documents shall take precedence as outlined under General Conditions.
- D. No claim for extra time or payment shall be based on work shown on Shop Drawings unless the claim is (1) noted on Contractor's transmittal letter accompanying Shop Drawings and (2) Contractor has complied with all applicable provisions of the General Conditions, including, without limitation, provisions regarding changes and payment, and all required written approvals.
- E. District shall not review Shop Drawings for quantities of materials or number of items supplied.
- F. District's and/or Architect's review of Shop Drawing will be general. District and/or Architect review does not relieve Contractor of responsibility for dimensions, accuracy, proper fitting, construction of Work, furnishing of materials, or Work required by Contract Documents and not indicated on

- Shop Drawings. The District's and/or Architect's review of Shop Drawings is not to be construed as approving departures from Contract Documents.
- G. Review of Shop Drawings and Schedules does not relieve Contractor from responsibility for any aspect of those Drawings or Schedules that is a violation of local, County, State, or Federal laws, rules, ordinances, or rules and regulations of commissions, boards, or other authorities or utilities having jurisdiction.
- H. Before submitting Shop Drawings for review, Contractor shall check Shop Drawings of its subcontractors for accuracy, and confirm that all Work contiguous with and having bearing on other work shown on Shop Drawings is accurately drawn and in conformance with Contract Documents.
- I. Submitted drawings and details must bear stamp of approval of Contractor:
 - (1) Stamp and signature shall clearly certify that Contractor has checked Shop Drawings for compliance with Drawings.
 - (2) If Contractor submits a Shop Drawing without an executed stamp of approval, or whenever it is evident (despite stamp) that Drawings have not been checked, the District and/or Architect will not consider them and will return them to the Contractor for revision and resubmission. In that event, it will be deemed that Contractor has not complied with this provision and Contractor shall bear risk of all delays to same extent as if it had not submitted any Shop Drawings or details.
- J. Submission of Shop Drawings (in either original submission or when resubmitted with correction) constitutes evidence that Contractor has checked all information thereon and that it accepts and is willing to perform Work as shown.
- K. Contractor shall pay for cost of any changes in construction due to improper checking and coordination. Contractor shall be responsible for all additional costs, including coordination. Contractor shall be responsible for costs incurred by itself, the District, the Architect, the Project Inspector, the Construction Manager, any other Subcontractor or contractor, etc., due to improperly checked and/or coordination of submittals.
- L. Shop Drawings must clearly delineate the following information:
 - (1) Project name and address.
 - (2) Specification number and description.
 - (3) Architect's name and project number.
 - (4) Shop Drawing title, number, date, and scale.
 - (5) Names of Contractor, Subcontractor(s) and fabricator.
 - (6) Working and erection dimensions.

- (7) Arrangements and sectional views.
- (8) Necessary details, including complete information for making connections with other Work.
- (9) Kinds of materials and finishes.
- (10) Descriptive names of materials and equipment, classified item numbers, and locations at which materials or equipment are to be installed in the Work. Contractor shall use same reference identification(s) as shown on Contract Drawings.
- M. Contractor shall prepare composite drawings and installation layouts when required to solve tight field conditions.
 - (1) Shop Drawings shall consist of dimensioned plans and elevations and must give complete information, particularly as to size and location of sleeves, inserts, attachments, openings, conduits, ducts, boxes, structural interferences, etc.
 - (2) Contractor shall coordinate these composite Shop Drawings and installation layouts in the field between itself and its Subcontractor(s) for proper relationship to the Work, the work of other trades, and the field conditions. The Contractor shall check and approve all submittal(s) before submitting them for final review.

1.04 PRODUCT DATA OR NON REPRODUCIBLE SUBMITTALS:

- A. Contractor shall submit manufacturer's printed literature in original form. Any fading type of reproduction will not be accepted. Contract must submit a minimum of six (6) each, to the District. District shall return one (1) to the Contractor, who shall reproduce whatever additional copies it requires for distribution.
- B. Contractor shall submit six (6) copies of a complete list of all major items of mechanical, plumbing, and electrical equipment and materials in accordance with the approved Submittal Schedule, except as required earlier to comply with the approved Construction Schedule. Other items specified are to be submitted prior to commencing Work. Contractor shall submit items of like kind at one time in a neat and orderly manner. Partial lists will not be acceptable.
- C. Submittals shall include manufacturer's specifications, physical dimensions, and ratings of all equipment. Contractor shall furnish performance curves for all pumps and fans. Where printed literature describes items in addition to that item being submitted, submitted item shall be clearly marked on sheet and superfluous information shall be crossed out. If highlighting is used, Contractor shall mark all copies.
- D. Equipment submittals shall be complete and include space requirements, weight, electrical and mechanical requirements, performance data, and supplemental information that may be requested.

E. Imported Materials Certification must be submitted at least ten (10) days before material is delivered.

1.05 SAMPLES:

- A. Contractor shall submit for approval Samples as required and within the time frame in the Contract Documents. Materials such as concrete, mortar, etc., which require on-site testing will be obtained from Project Site.
- B. Contractor shall submit four (4) samples except where greater or lesser number is specifically required by Contract Documents including, without limitation, the Specifications.
 - (1) Samples must be of sufficient size and quality to clearly illustrate functional characteristics, with integrally related parts and attachment devices.
 - (2) Samples must show full range of texture, color, and pattern.
- C. Contractor shall make all Submittals, unless it has authorized Subcontractor(s) to submit and Contractor has notified the District in writing to this effect.
- D. Samples to be shipped prepaid or hand-delivered to the District.
- E. Contractor shall mark samples to show name of Project, name of Contractor submitting, Contract number and segment of Work where representative Sample will be used, all applicable Specifications Sections and documents, Contract Drawing Number and detail, and ASTM or FS reference, if applicable.
- F. Contractor shall not deliver any material to Site prior to receipt of District's and/or Architect's completed written review and approval. Contractor shall furnish materials equal in every respect to approved Samples and execute Work in conformance therewith.
- G. District's and/or Architect's review, acceptance, and/or approval of Sample(s) will not preclude rejections of any material upon discovery of defects in same prior to final acceptance of completed Work.
- H. After a material has been approved, no change in brand or make will be permitted.
- I. Contractor shall prepare its Submittal Schedule and submit Samples of materials requiring laboratory tests to specified laboratory for testing not less than ninety (90) days before such materials are required to be used in Work.
- J. Samples which are rejected must be resubmitted promptly after notification of rejection and be marked "Resubmitted Sample" in addition to other information required.
- K. Field Samples and Mock-Ups are to be removed by Contractor at District's direction:

- (1) Size: As Specified.
- (2) Furnish catalog numbers and similar data, as requested.

1.06 REVIEW AND RESUBMISSION REQUIREMENTS:

- A. The District will arrange for review of Sample(s), Shop Drawing(s), Product Data, and other submittal(s) by appropriate reviewer and return to Contractor as provided below within twenty-one (21) days after receipt or within twenty-one (21) days after receipt of all related information necessary for such review, whichever is later.
- B. One (1) copy of product or materials data will be returned to Contractor with the review status.
- C. Samples to be incorporated into the Work will be returned to Contractor, together with a written notice designating the Sample with the appropriate review status and indicating errors discovered on review, if any. Other Samples will not be returned, but the same notice will be given with respect thereto, and that notice shall be considered a return of the Sample.
- D. Contractor shall revise and resubmit any Sample(s), Shop Drawing(s), Product Data, and other submittal(s) as required by the reviewer. Such resubmittals will be reviewed and returned in the same manner as original Sample(s), Shop Drawing(s), Product Data, and other submittal(s), within fourteen (14) days after receipt thereof or within fourteen (14) days after receipt of all related information necessary for such review. Such resubmittal shall not delay the Work.
- E. Contractor may proceed with any of the Work covered by Sample(s), Shop Drawing(s), Product Data, and other submittal(s) upon its return if designated as no exception taken, or revise as noted, provided the Contractor proceeds in accordance with the District and/or the Architect's notes and comments.
- F. Contractor shall not begin any of the work covered by a Sample(s), Shop Drawing(s), Product Data, and other submittal(s), designated as revise and resubmit or rejected, until a revision or correction thereof has been reviewed and returned to Contractor.
- G. Sample(s), Shop Drawing(s), Product Data, and other submittal(s) designated as revise and resubmit or rejected and requiring resubmittal, shall be revised or corrected and resubmitted to the District no later than fourteen (14) days or a shorter period as required to comply with the approved Construction Schedule, after its return to Contractor.
- H. Neither the review nor the lack of review of any Sample(s), Shop Drawing(s), Product Data, and other submittal(s) shall waive any of the requirements of the Contract Documents, or relieve Contractor of any obligation thereunder.
- I. District's and/or Architect's review of Shop Drawings does not relieve the Contractor of responsibility for any errors that may exist. Contractor is responsible for the dimensions and design of adequate connections and details and for satisfactory construction of all the Work.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 35 13.23

SITE STANDARDS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including without limitation, Site Access, Conditions, and Regulations;
- B. Special Conditions;
- C. Drug-Free Workplace Certification;
- D. Tobacco-Free Environment Certification;
- E. Criminal Background Investigation/Fingerprinting Certification;
- F. Temporary Facilities and Controls.

1.02 REQUIREMENTS OF THE DISTRICT:

- A. Drug-Free Schools and Safety Requirements:
 - (1) All school sites and other District Facilities have been declared "Drug-Free Zones." No drugs, alcohol and/or smoking are allowed at any time in any buildings and/or grounds on District property. No students, staff, visitors, or contractors are to use drugs on these sites.
 - (2) Smoking and the use of tobacco products by all persons is prohibited on or in District property. District property includes school buildings, school grounds, school-owned vehicles and vehicles owned by others while on District property. Contractor shall post: "Non-Smoking Area" in a highly visible location in each work area, staging area, and parking area. Contractor may designate a smoking area outside of District property within the public right-of-way, provided that this area remains quiet and unobtrusive to adjacent neighbors. This smoking area is to be kept clean at all times.
 - (3) Contractor shall ensure that no alcohol, firearms, weapons, or controlled substances enter or are used at the Site. Contractor shall immediately remove from the Site and terminate the employment of any employee(s) found in violation of this provision.
- B. Language: Profanity or other unacceptable and/or loud language will not be tolerated, "Cat calls" or other derogatory language toward students, staff, volunteers, parents or public will not be allowed.

- C. Disturbing the Peace (Noise and Lighting):
 - (1) Contractor shall observe the noise ordinance of the Site at all times including, without limitation, all applicable local, city, and/or state laws, ordinances, and/or regulations regarding noise and allowable noise levels.
 - (2) The use of radios, etc., shall be controlled to keep all sound at a level that cannot be heard beyond the immediate area of use. District reserves the right to prohibit the use of radios at the Site, except for mobile phones or other handheld communication radios.
 - (3) If portable lights are used after dark, all light must be located so as not to direct light into neighboring property.

D. Traffic:

- (1) Driving on the Premises shall be limited to periods when students and public are not present. If driving or deliveries must be made during the school hours, two (2) or more ground guides shall lead the vehicle across the area of travel. In no case shall driving take place across playgrounds or other pedestrian paths during recess, lunch, and/or class period changes. The speed limit on-the Premises shall be five (5) miles per hour (maximum) or less if conditions require.
- (2) All paths of travel for deliveries, including without limitation, material, equipment, and supply deliveries, shall be reviewed and approved by District in advance. Any damage will be repaired to the pre-damaged condition by the Contractor.
- (3) District shall designate a construction entry to the Site. If Contractor requests, District determines it is required, and to the extent possible, District shall designate a staging area so as not to interfere with the normal functioning of school facilities. Location of gates and fencing shall be approved in advance with District and at Contractor's expense.
- (4) Parking areas shall be reviewed and approved by District in advance.

 No parking is to occur under the drip line of trees or in softscape areas that could otherwise be damaged.
- E. All of the above shall be observed and complied with by the Contractor and all workers on the Site. Failure to follow these directives could result in individual(s) being suspended or removed from the work force at the discretion of the District. The same rules and regulations shall apply equally to delivery personnel, inspectors, consultants, and other visitors to the Site.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

REGULATORY REQUIREMENTS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Obtaining of Permits, Licenses and Registrations and Work to Comply with All Applicable Laws and Regulations;
- B. Special Conditions; and
- C. Quality Control.

1.02 DESCRIPTION:

This section covers the general requirements for regulatory requirements pertaining to the Work and is supplementary to all other regulatory requirements mentioned or referenced elsewhere in the Contract Documents.

1.03 REQUIREMENTS OF REGULATORY AGENCIES:

- A. All statutes, ordinances, laws, rules, codes, regulations, standards, and the lawful orders of all public authorities having jurisdiction over the Work, are hereby incorporated into these Contract Documents as if repeated in full herein and are intended to be included in any reference to Code or Building Code, unless otherwise specified, including, without limitation, the references in the list below. Contractor shall make available at the Site copies of all the listed documents applicable to the Work as the District and/or Architect may request, including, without limitation, applicable portions of the California Code of Regulations ("CCR").
 - (1) California Building Standards Administrative Code, Part 1, Title 24, CCR.
 - (2) California Building Code (CBC), Part 2, Title 24, CCR; (International Building Code volumes 1-2 and California Amendments).
 - (3) California Electrical Code (CEC), Part 3, Title 24, CCR; (National Electrical Code and California Amendments).
 - (4) California Mechanical Code (CMC), Part 4, Title 24, CCR; (Uniform Mechanical Code and California Amendments).
 - (5) California Plumbing Code (CPC), Part 5, Title 24, CCR; (Uniform Plumbing Code and California Amendments).

- (6) California Fire Code (CFC), Part 9, Title 24, CCR; (International Fire Code and California Amendments).
- (7) California Green Building Standards Code (CALGreen), Part 11, Title 24, CCR.
- (8) California Referenced Standards Code, Part 12, Title 24, CCR.
- (9) State Fire Marshal Regulations, Public Safety, Title 19, CCR.
- (10) Partial List of Applicable National Fire Protection Association (NFPA)
 Standards:
 - (a) NFPA 13 Automatic Sprinkler System.
 - (b) NFPA 14 Standpipes Systems.
 - (c) NFPA 17A Wet Chemical System
 - (d) NFPA 24 Private Fire Mains.
 - (e) (California Amended) NFPA 72 National Fire Alarm Codes.
 - (f) NFPA 253 Critical Radiant Flux of Floor Covering System.
 - (g) NFPA 2001 Clean Agent Fire Extinguishing Systems.
- (11) California Division of the State Architect interpretation of Regulations ("DSA IR"), including, without limitation:
 - (a) DSA IR A-6 Construction Change Document Submittal and Approval Processes.
 - (b) DSA IR A-7 Project Inspector Certification and Approval.
 - (c) DSA IR A-8 Project Inspector and Assistant Inspector Duties and Performance.
 - (d) DSA IR A-12 Assistant Inspector Approval.
- (12) DSA Procedures ("DSA PR")
 - (a) DSA PR 13-01 Construction Oversight Process
 - (b) DSA PR 13-02 Project Certification Process
- B. This Project shall be governed by applicable regulations, including, without limitation, the State of California's Administrative Regulations for the Division of the State Architect-Structural Safety (DSA/SS), Chapter 4, Part 1, Title 24, CCR, and the most current version on the date the bids are opened and as it pertains to school construction including, without limitation:

- (1) Test and testing laboratory per Section 4-335. District shall pay for the testing laboratory.
- (2) Special inspections per Section 4-333(c).
- (3) Deferred Approvals per section 4-317(g).
- (4) Verified reports per Sections 4-336 & 4-343(c).
- (5) Duties of the Architect & Engineers shall be per Sections 4-333(a) and 4-341.
- (6) Duties of the Contractor shall be per Section 4-343.
- (7) Duties of Project Inspector shall be per Section 4-334.
- (8) Addenda and Construction Change Documents per Section 4-338.

Contractor shall keep and make available all applicable parts of the most current version of Title 24 referred to in the plans and specifications at the Site during construction.

- C. Items of deferred approval shall be clearly marked on the first sheet of the Architect's and/or Engineer's approved Drawings. All items later submitted for approval shall be per Title 24 requirements to the DSA.
 - (1) Contractor shall submit the following to Architect for review and endorsement:
 - (a) Product information on proposed material/system supplier.
 - (b) Drawings, specifications, and calculations prepared, signed, and stamped by an architect or engineer licensed in the State of California for that portion of the Work.
 - (c) All other requirements as may be required by DSA.
 - (2) Cost of preparing and submitting documentation per DSA Deferred Approval requirements including required modifications to Drawings and Specifications, whether or not indicated in the Contract Documents, shall be borne by Contractor.
 - (3) Contractor shall not begin fabrication and installation of deferred approval items without first obtaining DSA approval of Drawings and Specifications.
 - (4) Schedule of Work Subject to DSA Deferred Approval: Window wall systems exceeding 10 feet in span.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 42 13

ABBREVIATIONS AND ACRONYMS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions including without limitation, Definitions;
- B. Special Conditions.

1.02 DOCUMENT INCLUDES:

- A. Abbreviations used throughout the Contract Documents.
- B. Reference to a technical society, organization, or body is by abbreviation, as follows:

1.	AA	The Aluminum Association
2.	AASHTO	American Association of State Highway and
		Transportation Officials
3.	ABPA	Acoustical and Board Products Association
4.	ACI	American Concrete Institute
5.	AGA	American Gas Association
6.	AGC	Associated General Contractors of America
7.	AHC	Architectural Hardware Consultant
8.	AHRI	Air Conditioning, Heating, Refrigeration
		Institute
9.	ΑI	Asphalt Institute
10.	AIA	American Institute of Architects
	AISC	American Institute of Steel Construction
	AISI	American Iron and Steel Institute
	AMCA	Air Movement and Control Association
14.	ANSI	American National Standards Institute
	APA	APA – The Engineered Wood Association
16.	ASCE	American Society of Civil Engineers
17.	ASHRAE	American Society of Heating, Refrigeration and
		Air Conditioning Engineers
18.	ASME	American Society of Mechanical Engineers
19.	ASTM	American Society of Testing and Materials
		International
20.	AWPA	American Wood Protection Association
21.	AWPI	American Wood Preservers Institute
22.	AWS	American Welding Society
23.	AWSC	American Welding Society Code
24.	AWI	Architectural Woodwork Institute
	AWWA	American Water Works Association
26.	BIA	The Brick Industry Association

27. 28. 29. 30. 31. 32. 33. 34. 35. 36. 37.	CCR CLFMI CRA CRSI CS CSI CTI FGIA FGMA FIA FM FS/FED SPEC	California Code of Regulations Chain Link Fence Manufacturers Institute California Redwood Association Concrete Reinforcing Steel Institute Commercial Standards Construction Specifications Institute Cooling Technology Institute Fenestration and Glazing Industry Alliance Flat Glass Manufacturers' Association Factory Insurance Association Factory Mutual Global Federal Specification
39.	FTI	Facing Title Institute
40.	GA	Gypsum Association
41.	IAPMO	International Association of Plumbing and Mechanical Officials
42.	ICC	International Code Council
43.	IEEE	Institute of Electrical and Electronics Engineers
44.	IES	Illuminating Engineering Society
45.	MCAC	Mason Contractors Association of California
46.	MIMA	Mineral Wool Insulation Manufacturers Association
47.	MLMA	Metal Lath Manufacturers Association
48.	MS/MIL SPEC	Military Specifications
49.	NAAMM	National Association of Architectural Metal Manufacturers
50.	NBHA	National Builders Hardware Association
51.	NCMA	National Concrete Masonry Association
52.	NCSEA	National Council of Structural Engineers Associations
53.	NEC	National Electrical Code
54.	NEMA	National Electrical Manufacturers Association
55.	NIST	National Institute of Standards and Technology
56.	NSI	Natural Stone Institute
57.	NTMA	National Terrazzo and Mosaic Association, Inc.
58.	ORS	Office of Regulatory Services (California)
59.	OSHA	Occupational Safety and Health Act
60.	PCI	Precast/Prestressed Concrete Institute
61.	PCA PCA	Portland Cement Association
62. 63.	PDI	Painting Contractors Association Plumbing Drainage Institute
64.	PEI	Porcelain Enamel Institute, Inc.
65.	PG&E	Pacific Gas & Electric Company
66.	PS	Product Standards
67.	SDI	Steel Door Institute; Steel Deck Institute
68.	SJI	Steel Joist Institute
69.	SSPC	Society for Protective Coatings
70.	TCNA	Tile Council of North America, Inc.
71.	TPI	Truss Plate Institute
72.	UBC	Uniform Building Code
73.	UL	Underwriters Laboratories Code

74.	UMC	Uniform Mechanical Code
75.	USDA	United States Department of Agriculture
76.	VI	Vermiculite Institute
77.	WCLIB	West Coast Lumber Inspection Bureau
78.	WDMA	Window and Door Manufacturers Association
79.	WEUSER	Western Electric Utilities Service Engineering
		Requirements
80.	WIC	Woodwork Institute of California

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 42 16

DEFINITIONS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions including without limitation, Definitions;
- B. Special Conditions.

1.02 QUALITY ASSURANCE

- A. For products or workmanship specified by association, trade, or Federal Standards, Contractor shall comply with requirements of the standard, except when more rigid requirements are specified in the Contract Documents, or are required by applicable codes.
- B. Contractor shall conform to current reference standard publication date in effect on the date of bid opening.
- C. Contractor shall obtain copies of standards unless specifically required not to by the Contract Documents.
- D. Contractor shall maintain a copy of all standards at jobsite during submittals, planning, and progress of the specific Work, until final completion, unless specifically required not to by the Contract Documents.
- E. Should specified reference standards conflict with Contract Documents, Contractor shall request clarification from the District and/or the Architect before proceeding.
- F. The contractual relationship of the parties to the Contract shall not be altered from the contractual relationship as indicated in the Contract Documents by mention or inference otherwise in any referenced document.
- G. Governing Codes shall be as shown in the Contract Documents including, without limitation, the Specifications.

DOCUMENT 01 42 19

REFERENCES

PART 1 - GENERAL

1.01 SCHEDULE OF REFERENCES:

The following information is intended only for the general assistance of the Contractor, and the District does not represent that all of the information is current. It is the Contractor's responsibility to verify the correct information for each of the entities listed.

AA	The Aluminum Association 1400 Crystal Drive, Suite 430 Arlington, VA 22202 www.aluminum.org	703/358-2960
AABC	Associated Air Balance Council 2401 Pennsylvania Avenue NW, Suite 330 Washington, DC 20037 www.aabc.com	202/737-0202
AASHTO	American Association of State Highway and Transportation Officials 555 12th St. NW - Suite 1000 Washington, DC 20004 www.transportation.org	202/624-5800
AATCC	American Association of Textile Chemists and Colorists P.O. Box 12215Research Triangle Park, NC 27709-2215 www.aatcc.org	919/549-8141
ACA	American Coatings Association 901 New York Ave., NW, Suite 300 West Washington, DC 20001 www.paint.org	202/462-6272
ACI	American Concrete Institute 38800 Country Club Dr. Farmington Hills, MI 48331-3439 www.concrete.org	248/848-3800
ACPA	American Concrete Pipe Association 5605 N. MacArthur Blvd., Suite 340 Irving, TX 75038 www.concrete-pipe.org	972/506-7216

ADC	Air Duct Council 1901 N. Roselle Road, Suite 800 Schaumburg, IL 60195 www.flexibleduct.org	847/706-6750
AF&PA	American Forest and Paper Association 1101 K Street, NW, Suite 700 Washington, DC 20005 www.afandpa.org	202/463-2700
AGA	American Gas Association 400 North Capitol Street, NW, Suite 450 Washington, DC 20001 www.aga.org	202/824-7000
AGC	Associate General Contractors of America 2300 Wilson Blvd., Suite 300 Arlington, VA 22201 www.agc.org	703/548-3118
АНА	American Hardboard Association 1210 West Northwest Highway Palatine, IL 60067 http://domensino.com/AHA/default.htm	847/934-8800
AI	Asphalt Institute 2696 Research Park Drive Lexington, KY 40511-8480 www.asphaltinstitute.org	859/288-4960
AIA	The American Institute of Architects 1735 New York Ave., NW Washington, DC 20006-5292 www.aia.org	202/626-7300
AISC	American Institute of Steel Construction 130 East Randolph Street, Suite 2000 Chicago, IL 60601 www.aisc.org	312.670.2400
AISI	American Iron and Steel Institute 25 Massachusetts Ave., NW, Suite 800 Washington, DC 20001 www.steel.org	202/452-7100
AITC	American Institute of Timber Construction 1010 South 336th Street, #210 Federal Way, WA 98003-7394 https://www.plib.org/aitc/	253/835-3344

ALI	Associated Laboratories, Inc.	214/565-0593
, , , ,	P.O. Box 152837	211/303 0333
	Dallas, TX 75315	
	www.assoc-labs.com	
ALSC	American Lumber Standards Committee, Inc.	301/972-1700
	7470 New Technology Way, Suite F	
	Frederick, MD 21703	
	www.alsc.org	
AMCA	Air Movement and Control Association International, Inc.	847/394-0150
	30 W. University Drive	
	Arlington Heights, IL 60004	
	www.amca.org	
AMPP	Association for Materials Protection and Performance	412/281-2331
(formerly	(merger of Society for Protective Coatings and National	877/281-7772
SSPC)	Association of Corrosion Engineers International)	
	(formerly Steel Structures Painting Council)	
	800 Trumbull Drive	
	Pittsburgh, PA 15205	
	www.sspc.org	
ANLA	Appenianal last (manages of Appeniana Nurseau 9 Landsons	614/407 1117
ANLA	AmericanHort (merger of American Nursery & Landscape Association and OFA – The Association of Horticultural	614/487-1117
	Professionals)	
	2130 Stella Court	
	Columbus, OH 43215	
	www.americanhort.org	
ANSI	American National Standards Institute	202/293-8020
	1899 L Street, NW, 11th Floor	
	Washington, DC 20036	
	www.ansi.org	
A D A	ADA TI E : IW IA : ::	252/565 6622
APA	APA-The Engineered Wood Association	253/565-6600
	7011 S. 19th Street	
	Tacoma, WA 98466-5333 www.apawood.org	
	www.apawoou.org	
L		i .

APA	Architectural Precast Association 325 John Knox Rd, Suite L-103 Tallahassee, FL 32303 www.archprecast.org	850/205-5637
APCIA	American Property Casualty Insurance Association (merger of American Insurance Association (formerly the National Board of Fire Underwriters) with the Property Casualty Insurers Association of America) 555 12th St, NW, Suite 550 Washington DC 20004 www.apci.org	202/828-7100
AHRI	Air Conditioning and Refrigeration Institute (now Air- Conditioning, Heating, & Refrigeration Institute) 2311 Wilson Blvd, Suite 400 Arlington, VA 22201 www.ahrinet.org	703/524-8800
ARMA	Asphalt Roofing Manufacturers Association 2331 Rock Spring Road Forest Hill, MD 21050 www.asphaltroofing.org	443/640-1075
ASA	The Acoustical Society of America Suite 300 1305 Walt Whitman Road Melville, NY 11747-4300 https://acousticalsociety.org/	516/576-2360
ASCE	American Society of Civil Engineers 1801 Alexander Bell Drive Reston, VA 20191 www.asce.org	800/548-2723 703/295-6300
ASHRAE	American Society of Heating, Refrigerating and Air Conditioning Engineers 180 Technology Parkway Peachtree Corners, GA 30092 www.ashrae.org	800/527-4723 404/636-8400
ASLA	American Society of Landscape Architects 636 Eye Street, NW Washington, DC 20001-3736 www.asla.org	202/898-2444
ASME	American Society of Mechanical Engineers Two Park Avenue New York, NY 10016-5990 www.asme.org	800/834-2763

ASPE	American Society of Plumbing Engineers 6400 Shafer Court, Suite 350 Rosemont, IL 60018 http://aspe.org	847/296-0002
ASQ	American Society for Quality P.O. Box 3005 Milwaukee, WI 53201-3005 or 600 North Plankinton Avenue Milwaukee, WI 53203 http://asq.org	800/248-1946 414/272-8575
ASSE	American Society of Sanitary Engineering 18927 Hickory Creek Dr., Suite 220 Mokena, IL 60448 www.asse-plumbing.org	708/995-3019
ASTM	ASTM International 100 Barr Harbor Drive PO Box C700 West Conshohocken, PA, 19428-2959 www.astm.org	610/832-9500
AWCI	Association of the Wall and Ceiling Industry 513 West Broad Street, Suite 210 Falls Church, VA 22046 www.awci.org	703/538-1600
AWPA	American Wood Protection Association (formerly American Wood Preservers Institute) P.O. Box 361784 Birmingham, AL 35236-1784 www.awpa.com	205/733-4077
AWS	American Welding Society 8669 NW 36 Street, Suite 130 Miami, FL 33166 www.aws.org	800/443-9353 305/443-9353
AWI	Architectural Woodwork Institute 46179 Westlake Drive, Suite 120 Potomac Falls, VA 20165-5874 www.awinet.org	571/323-3636
AWWA	American Water Works Association 6666 West Quincy Avenue Denver, CO 80235 www.awwa.org	800/926-7337 303/794-7711

ВНМА	Builders Hardware Manufacturers Association 355 Lexington Avenue, 15th Floor New York, NY 10017 www.buildershardware.com	212/297-2122
BIA	The Brick Industry Association 12007 Sunrise Valley Drive, Suite 430 Reston, VA 20191 www.gobrick.com	703/620-0010
CGA	Compressed Gas Association 8484 Westpark Drive, Suite 220 McLean, VA 22102 www.cganet.com	703/788-2700
CISCA	Ceilings & Interior Systems Construction Association 1010 Jorie Blvd, Suite 30 Oak Brook, IL 60523 www.cisca.org	630/584-1919
CISPI	Cast Iron Soil Pipe Institute 2401 Fieldcrest Dr. Mundelein, IL 60060 www.cispi.org	224/864-2910
CLFMI	Chain Link Fence Manufacturers Institute 10015 Old Columbia Road, Suite B-215 Columbia, MD 21046 chainlinkinfo.org	301/596-2583
СРА	Composite Panel Association 19465 Deerfield Avenue, Suite 306 Leesburg, VA 20176 www.compositepanel.org	703/724-1128
CPSC	Consumer Product Safety Commission 4330 East-West Highway Bethesda, MD 20814 www.cpsc.gov	800/638-2772
CRA	California Redwood Association 818 Grayson Road, Suite 201 Pleasant Hill, CA 94523 www.calredwood.org	925/935-1499

CRI	Carpet and Rug Institute 100 S. Hamilton Street Dalton, GA 30722-2048 www.carpet-rug.org	706/278-3176
CRSI	Concrete Reinforcing Steel Institute 933 N. Plum Grove Road Schaumburg, IL 60173-4758 www.crsi.org	847/517-1200
CSI	The Construction Specifications Institute 123 North Pitt St, Suite 450 Alexandria, VA 22314 www.csinet.org	800/689-2900
CTIOA	Ceramic Tile Institute of America 12061 Jefferson Blvd. Culver City, CA 90230-6219 www.ctioa.org	310/574-7800
DHA	Decorative Hardwoods Association (formerly Hardwood Plywood & Veneer Association) 42777 Trade West Dr. Sterling, VA 20166 https://www.decorativehardwoods.org/	703/435-2900
DHI	Door and Hardware Institute (formerly National Builders Hardware Association) 2001 K Street NW, 3rd Floor North Washington, DC 20006 www.dhi.org	202/367-1134
DIPRA	Ductile Iron Pipe Research Association P.O. Box 190306 Birmingham, AL 35219 www.dipra.org	205/402-8700
DOC	U.S. Department of Commerce 1401 Constitution Ave., NW Washington, DC 20230 www.commerce.gov	202/482-2000
DOT	U.S. Department of Transportation 1200 New Jersey Avenue, SE Washington, DC 20590 www.dot.gov	855/368-4200
EJMA	Expansion Joint Manufacturers Association, Inc. 25 North Broadway Tarrytown, NY 10591 www.ejma.org	914/332-0040

EPA	Environmental Protection Agency Ariel Rios Building 1200 Pennsylvania Avenue, N.W. Washington, DC 20460 www.epa.gov	202/272-0167
FCICA	Floor Covering Installation Contractors Association 800 Roosevelt Rd., Bldg. C, Suite 312 Glen Ellyn, IL 60137 www.fcica.com	630/672-3702
FGIA	Fenestration and Glazing Industry Alliance 1900 E Golf Rd, Suite 1250 Schaumburg, IL 60173 https://fgiaonline.org/	847/303-5664
FM Global	Factory Mutual Insurance Company Amy Daley Global Practice Leader – Education, Public Entities, Health Care FM Global 270 Central Avenue Johnston, RI 02919-4949 www.fmglobal.com	401/275-3000 401/275-3029
FS	General Services Administration (GSA) Index of Federal Specifications, Standards and Commercial Item Descriptions 470 East L'Enfant Plaza, SW, Suite 8100 Washington, DC 20407 www.gsa.gov	202/619-8925
GA	The Gypsum Association 962 Wayne Ave., Suite 620 Silver Spring, MD 20910 www.gypsum.org	301/277-8686
НМА	Hardwood Manufacturers Association One Williamsburg Place, Suite 108 Warrendale, PA 15086 http://hmamembers.org	412/244-0440

IAPMO	International Association of Plumbing and Mechanical Officials (formerly the Western Plumbing Officials Association) 4755 E. Philadelphia St. Ontario, CA 91761 www.iapmo.org	909/472-4100
ICC	International Code Council 500 New Jersey Avenue, NW, 6th Floor Washington, DC 20001 www.iccsafe.org	888/422-7233
IEEE	Institute of Electrical and Electronics Engineers 3 Park Avenue, 17th Floor New York, NY 10016-5997 www.ieee.org	212/419-7900
IES	Illuminating Engineering Society 120 Wall Street, Floor 17 New York, NY 10005-4001 www.ies.org	212/248-5000
ITRK	Intertek Testing Services 3933 US Route 11 Cortland, NY 13045 www.intertek.com	607/753-6711
MCAA	Mechanical Contractors Association of America 1385 Piccard Drive Rockville, MD 20850 www.mcaa.org	301/869-5800
MMPA (formerly WMMPA)	Moulding & Millwork Producers Association (formerly Wood Moulding & Millwork Producers Association) 507 First Street Woodland, CA 95695 www.wmmpa.com	530/661-9591 800/550-7889
MSS	Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc. 127 Park Street, NE Vienna, VA 22180-4602 http://mss-hq.org	703/281-6613
NAAMM	National Association of Architectural Metal Manufacturers 800 Roosevelt Rd. Bldg. C, Suite 312 Glen Ellyn, IL 60137 www.naamm.org	630/942-6591

NAIMA	North American Insulation Manufacturers Association P.O. Box 1906 Alexandria, VA 22313 https://insulationinstitute.org/	703/684-0084
NALP	National Association of Landscape Professionals (formerly Professional Landcare Network) 12500 Fair Lakes Circle, Suite 200 Fairfax, VA 22033 https://www.landscapeprofessionals.org/	703/736-9666
NAPA	National Asphalt Pavement Association 6406 Ivy Lane, Suite 350 Greenbelt, MD 20770-1441 www.asphaltpavement.org	888/468-6499 301/731-4748
NCSPA	National Corrugated Steel Pipe Association 14070 Proton Road, Suite 100 Dallas, TX 75244 www.ncspa.org	972/850-1907
NCMA	National Concrete Masonry Association 13750 Sunrise Valley Drive Herndon, VA 20171-4662 www.ncma.org	703/713-1900
NEBB	National Environmental Balancing Bureau 8575 Grovemont Circle Gaithersburg, MD 20877 www.nebb.org	301/977-3698
NECA	National Electrical Contractors Association 1201 Pennsylvania Ave. NW Washington, D.C., 20004 www.necanet.org	202/991-6300
NEMA	National Electrical Manufacturers Association 1300 North 17th Street N, Suite 900 Rosslyn, VA 22209 www.nema.org	703/841-3200
NEII	National Elevator Industry, Inc. 5537 SW Urish Road Topeka, KS 66610 https://nationalelevatorindustry.org/	703/589-9985
NFPA	National Fire Protection Association 1 Batterymarch Park Quincy, MA02169-7471 www.nfpa.org	800/344-3555 855/274-8525

NGA (formerly GANA)	National Glass Association (merged with Glass Association of North America) 1945 Old Gallows Road Suite 750 Vienna, VA 22182 www.glass.org	866/342-5642 Ext 127
NHLA	National Hardwood Lumber Association PO Box 34518 Memphis, TN 38184 www.nhla.com	901/377-1818
NIA	National Insulation Association 516 Herndon Pkwy., Ste. D Herndon, VA 20170 www.insulation.org	703/464-6422
NRCA	National Roofing Contractors Association 10255 W. Higgins Road, Suite 600 Rosemont, IL 60018-5607 www.nrca.net	847/299-9070
NSF	NSF International 789 N. Dixboro Road Ann Arbor, MI 48113-0140 www.nsf.org	800/673-6275 734/769-8010
NSI	Natural Stone Institute (formerly Marble Institute of America) 380 E. Lorain St. Oberlin, OH 44074 https://www.naturalstoneinstitute.org/	440/250-9222
NTMA	National Terrazzo and Mosaic Association 209 N. Crockett Street, Suite 2 PO Box 2605 Fredericksburg, TX 78624 www.ntma.com	800/323-9736
OSHA	Occupational Safety and Health Act U.S. Department of Labor Occupational Safety & Health Administration 200 Constitution Ave., NW Washington, DC 20210 www.osha.gov	800/321-OSHA (6742)

PCA	Portland Cement Association 5420 Old Orchard Road Skokie, IL 60077 or 200 Massachusetts Ave NW, Suite 200 Washington, DC 20001 www.cement.org	847/966-6200 202/408-9494
PCA	Painting Contractors Association (formerly Painting and Decorating Contractors of America) 2316 Millpark Drive Maryland Heights, MO 63043 https://www.pcapainted.org/	800/322-7322
PCI	Precast/Prestressed Concrete Institute 8770 W. Bryn Mawr Ave., Suite 1150 Chicago, IL 60631 www.pci.org	312/786-0300
PDI	Plumbing & Drainage Institute 800 Turnpike Street, Suite 300 North Andover, MA 01845 http://pdionline.org	978/557-0720 800/589-8956
PEI	Porcelain Enamel Institute, Inc. P.O. Box 920220 Norcross, GA 30010 www.porcelainenamel.com	770/676-9366
PG&E	Pacific Gas & Electric Company P.O. Box 997300 Sacramento, CA 95899-7300 www.pge.com	800/743-5000
PLIB	Pacific Lumber Inspection Bureau (formerly West Coast Lumber Inspection Bureau) 1010 South 336th Street, Suite 210 Federal Way, WA 98003-7394 https://www.plib.org/	253/835-3344
RFCI	Resilient Floor Covering Institute 115 Broad Street, Suite 201 La Grange, GA 30240 www.rfci.com	706/882-3833
SDI	Steel Deck Institute P.O. Box 426 Glenshaw, PA 15116 www.sdi.org	412/487-3325

SDI	Steel Door Institute 30200 Detroit Road Westlake, OH 44145 www.steeldoor.org	440/899-0010
SJI	Steel Joist Institute 140 West Evans Street, Suite 203 Florence, SC 29501 http://steeljoist.org	843/407-4091
SMA	Stucco Manufacturers Association 5753 E Santa Ana Cyn Rd, #G-156 Anaheim, CA 92807 www.stuccomfgassoc.com	714/473-9579
SMACNA	Sheet Metal and Air Conditioning Contractors' National Association 4201 Lafayette Center Drive Chantilly, VA 20151-1219 www.smacna.org	703/803-2980
SPI	SPI: The Plastics Industry Trade Association, Inc. 1425 K St. NW, Suite 500 Washington, DC 20005 www.plasticsindustry.org	202/974-5200
TCA	The Tile Council of North America 100 Clemson Research Blvd. Anderson, SC 29625 www.tcnatile.com	864/646-8453
TPI	Truss Plate Institute 2670 Crain Highway, Suite 203 Waldorf, MD 20601 www.tpinst.org	240/587-5582
TPI	Turfgrass Producers International 444 E. Roosevelt Road #346 Lombard, IL 60148 www.turfgrasssod.org	800/405-8873 847/649-5555
TCIA	Tree Care Industry Association (formerly the National Arborist Association) 670 N Commercial Street, Suite 201 Manchester, NH 03101 www.tcia.org	603/314-5380 800/733-2622

TVI	The Vermiculite Institute c/o The Schundler Company 10 Central Street Nahant, MA 01908 www.vermiculiteinstitute.org	732/287-2244
UL	Underwriters Laboratories Inc. 333 Pfingsten Road Northbrook, IL 60062-2096 www.ul.com	847/272-8800 877/854-3577
UNI	Uni-Bell PVC Pipe Association 201 E. John Carpenter Freeway, Suite 750 Irving, TX 75062 www.uni-bell.org	972/243-3902
USDA	U.S. Department of Agriculture 1400 Independence Ave., S.W. Washington, DC 20250 www.usda.gov	202/720-2791
WA	Wallcoverings Association 35 E Wacker Dr., Suite 850 Chicago, IL 60601 www.wallcoverings.org	312/224-2574
WCMA	Window Covering Manufacturers Association 355 Lexington Avenue 15th Floor New York, NY 10017 www.wcmanet.org	212/297-2122
WDMA	Window & Door Manufacturers Association 2001 K Street NW, 3rd Floor North Washington, D.C. 20006 www.wdma.com	202/367-1157
WI	Woodwork Institute 1455 Response Road, Suite 110 Sacramento, CA 95815 www.wicnet.org	916/372-9943
WRI	Wire Reinforcement Institute 942 Main Street, Suite 300 Hartford, CT 06103 www.wirereinforcementinstitute.org	860/240-9545
WWCA	Western Wall & Ceiling Contractors Association 1910 N. Lime St. Orange, CA 92865 www.wwcca.org	714/221-5520

WWPA	Western Wood Products Association (formerly Redwood	503/224-3930
	Inspection Service)	
	1500 SW First Ave., Suite 870	
	Portland, OR 97201	
	www.wwpa.org	
	, -	

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 43 00

MATERIALS AND EQUIPMENT

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Purchase of Materials and Equipment;
- B. Special Conditions;
- C. Imported Materials Certification.

1.02 MATERIAL AND EQUIPMENT

- A. Only items approved by the District and/or Design Professional shall be used.
- B. Contractor shall submit lists of products and other product information in accordance with the Contract Documents, including, without limitation, the provisions regarding the submittals.

1.03 MATERIAL AND EQUIPMENT COLORS

- A. The District and/or Architect will provide a schedule of colors.
- B. No individual color selections will be made until after approval of all pertinent materials and equipment and after receipt of appropriate samples in accordance with the Contract Documents, including, without limitation, the provisions regarding the submittals.
- C. Contractor shall request priority in writing for any item requiring advance ordering to maintain the approved Construction Schedule.

1.04 DELIVERY, STORAGE, AND HANDLING

- A. Contractor shall deliver manufactured materials in original packages, containers, or bundles (with seals unbroken), bearing name or identification mark of manufacturer.
- B. Contractor shall deliver fabrications in as large assemblies as practicable; where specified as shop-primed or shop-finished, package or crate as required to preserve such priming or finish intact and free from abrasion.
- C. Contractor shall store materials in such a manner as necessary to properly protect them from damage. Materials or equipment damaged by handling, weather, dirt, or from any other cause will not be accepted.

- D. Materials are not acceptable that have been warehoused for long periods of time, stored or transported in improper environment, improperly packaged, inadequately labeled, poorly protected, excessively shipped, deviated from normal distribution pattern, or reassembled.
- E. Contractor shall store material so as to cause no obstructions of sidewalks, roadways, access to the Site or buildings, and underground services.

 Contractor shall protect material and equipment furnished under Contract.
- F. Contractor may store materials on Site with prior written approval by the District, all material shall remain under Contractor's control and Contractor shall remain liable for any damage to the materials. Should the Project Site not have storage area available, the Contractor shall provide for off-site storage at a bonded warehouse and with appropriate insurance coverage at no cost to District.
- G. When any room in Project is used as a shop or storeroom, the Contractor shall be responsible for any repairs, patching, or cleaning necessary due to that use. Location of storage space shall be subject to prior written approval by District.

PART 2 - PRODUCTS

2.01 MANUFACTURERS

- A. Manufacturers listed in various sections of Contract Documents are names of those manufacturers that are believed to be capable of supplying one or more of items specified therein.
- B. The listing of a manufacturer does not imply that every product of that manufacturer is acceptable as meeting the requirements of the Contract Documents.

2.02 FACILITIES AND EQUIPMENT

Contractor shall provide, install, maintain, and operate a complete and adequate facility for handling, the execution, disposal, and distribution of material and equipment as required for proper and timely performance of Work connected with Contract.

2.03 MATERIAL REFERENCE STANDARDS

Where material is specified solely by reference to "standard specifications" and if requested by District, Contractor shall submit for review data on actual material proposed to be incorporated into Work of Contract listing name and address of vendor, manufacturer, or producer, and trade or brand names of those materials, and data substantiating compliance with standard specifications.

PART 3 - EXECUTION

3.01 WORKMANSHIP

- A. Where not more specifically described in any other Contract Documents, workmanship shall conform to methods and operations of best standards and accepted practices of trade or trades involved and shall include items of fabrication, construction, or installation regularly furnished or required for completion (including finish and for successful operation, as intended).
- B. Work shall be executed by tradespersons skilled in their respective lines of Work. When completed, parts shall have been durably and substantially built and present a neat appearance.

3.02 COORDINATION

- A. Contractor shall coordinate installation of Work so as to not interfere with installation of others. Adjustment or rework because of Contractor's failure to coordinate will be at no additional cost to District.
- B. Contractor shall examine in-place work for readiness, completeness, fitness to be concealed or to receive other work, and in compliance with Contract Documents. Concealing or covering Work constitutes acceptance of additional cost which will result should in-place Work be found unsuitable for receiving other Work or otherwise deviating from the requirements of the Contract Documents.

3.03 COMPLETENESS

Contractor shall provide all portions of the Work, unless clearly stated otherwise, installed complete and operational with all elements, accessories, anchorages, utility connections, etc., in manner to assure well-balanced performance, in accordance with manufacturer's recommendations and by Contract Documents. For example, electric water coolers require water, electricity, and drain services; roof drains require drain system; sinks fit within countertop, etc. Terms such as "installed complete," "operable condition," "for use intended," "connected to all utilities," "terminate with proper cap," "adequately anchored," "patch and refinish," "to match similar," should be assumed to apply in all cases, except where completeness of functional or operable condition is specifically stated as not required.

3.04 APPROVED INSTALLER OR APPLICATOR

Installation by a manufacturer's approved installer or applicator is an understood part of Specifications and only approved installer or applicator is to provide on-site Work where specified manufacturer has on-going program of approving (i.e. certifying, bonding, re-warranting) installers or applicators. Newly established relationships between a manufacturer and an installer or applicator who does not have other approved applicator work in progress or completed is not approved for this Project.

3.05 MANUFACTURER'S RECOMMENDATIONS

All installations shall be in accordance with manufacturer's published recommendations and specific written directions of manufacturer's representative. Should Contract Documents differ from recommendations of manufacturer or directions of his representative, Contractor shall analyze differences, make recommendations to the District and the Architect in writing, and shall not proceed until interpretation or clarification has been issued by the District and/or the Architect.

DOCUMENT 01 45 00

QUALITY CONTROL

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Inspector, Inspections and Tests, Uncovering of Work and Non-conforming of Work and Correction of Work;
- B. Special Conditions.

1.02 RELATED CODES:

- A. The Work is governed by requirements of Title 24, California Code of Regulations ("CCR"), and the Contractor shall keep a copy of these available at the job Site for ready reference during construction.
- B. The Division of the State Architect ("DSA") shall be notified at or before the start of construction.

1.03 OBSERVATION AND SUPERVISION:

- A. The District and Architect or their appointed representatives will review the Work and the Contractor shall provide facilities and access to the Work at all times as required to facilitate this review. Administration by the Architect and any consulting Structural Engineer will be in accordance with applicable regulations, including, without limitation, CCR, Part 1, Title 24, Section 4-341.
- B. One or more Project Inspector(s) approved by DSA and employed by or in contract with the District, referred to hereinafter as the "Project Inspector", will observe the work in accordance with CCR, Part 1, Title 24, Sections 4-333(b) and 4-342:
 - (1) The Project Inspector and Special Inspector(s) shall have access to the Work wherever it is in preparation or progress for ascertaining that the Work is in accordance with the Contract Documents and all applicable code sections. The Contractor shall provide facilities and operation of equipment as needed, and access as required and shall provide assistance for sampling or measuring materials.
 - (2) The Project Inspector will notify the District and Architect and call the attention of the Contractor to any observed failure of Work or material to conform to Contract Documents.
 - (3) The Project Inspector shall observe and monitor all testing and inspection activities required.

The Contractor shall conform with all applicable laws as indicated in the Contract Documents, including, without limitation, to CCR, Part 1, Title 24, Section 4-343. The Contractor shall supervise and direct the Work and maintain a competent superintendent on the job who is authorized to act in all matters pertaining to the Work. The Contractor's superintendent shall also inspect all materials, as they arrive, for compliance with the Contract Documents. Contractor shall reject defective Work or materials immediately upon delivery or failure of the Work or material to comply with the Contract Documents. The Contractor shall submit verified reports as indicated in the Contract Documents, including, without limitation, the Specifications and as required by Part 1, Title 24, Section 4-336.

1.04 TESTING AGENCIES:

- A. Testing agencies and tests shall be in conformance with the General Documents and the requirements of Part 1, Title 24, Section 4- 335.
- B. Testing and inspection in connection with earthwork shall be under the direction of the District's consulting soils engineer, if any, referred to hereinafter as the "Soils Engineer."
- C. Testing and inspection of construction materials and workmanship shall be performed by a qualified laboratory, referred to hereinafter as the "Testing Laboratory." The Testing Laboratory shall be under direction of an engineer registered in the State of California, shall conform to requirements of ASTM E329, and shall be employed by or in contract with the District.

1.05 TESTS AND INSPECTIONS:

- A. The Contractor shall be responsible for notifying the District and Project Inspector of all required tests and inspections. Contractor shall notify the District and Project Inspector at least seventy-two hours (72) hours in advance of performing any Work requiring testing or inspection.
- B. The Contractor shall provide access to Work to be tested and furnish incidental labor, equipment, and facilities to facilitate all inspections and tests.
- C. The District will pay for first inspections and tests required by the "CCR", and other inspections or tests that the District and/or the Architect may direct to have made, including the following principal items:
 - (1) Tests and observations for earthwork and paving.
 - (2) Tests for concrete mix designs, including tests of trial batches.
 - (3) Tests and inspections for structural steel work.
 - (4) Field tests for framing lumber moisture content.
 - (5) Additional tests directed by the District that establish that materials and installation comply with the Contract Documents.
 - (6) Tests and observations of welding and expansion anchors.

- D. The District may at its discretion, pay and then back charge the Contractor for:
 - (1) Retests or re-inspections, if required, and tests or inspections required due to Contractor error or lack of required identifications of material.
 - (2) Uncovering of work in accordance with Contract Documents.
 - (3) Testing done on weekends, holidays, and overtime will be chargeable to the Contractor for the overtime portion.
 - (4) Testing done off Site.
- E. Testing and inspection reports and certifications:
 - (1) If initially received by Contractor, Contractor shall provide to each of the following a copy of the agency or laboratory report of each test or inspection or certification.
 - (a) The District;
 - (b) The Construction Manager, if any;
 - (c) The Architect;
 - (d) The Consulting Engineer, if any;
 - (e) Other engineers on the Project, as appropriate;
 - (f) The Project Inspector; and
 - (g) The Contractor.
 - (2) When the test or inspection is one required by the CCR, a copy of the report shall also be provided to the DSA.

PART 2 - PRODUCTS

2.01 TYPE OF TESTS AND INSPECTIONS

- A. Testing and inspection shall be in accordance with DSA Form 103 (or current version)
- B. Slump Test ASTM C 143
- C. Concrete Tests

Testing agency shall test concrete used in the work per the following paragraphs:

(1) Compressive Strength:

- (a) Minimum number of tests required: One (1) set of three (3) cylinders for each 100 cubic yards (Sec. 2604(h) 01) of concrete or major fraction thereof, placed in one (1) day. See Title 24, Section 2605(g).
- (b) Two cylinders of each set shall be tested at twenty-eight (28) days. One (1) cylinder shall be held in reserve and tested only when directed by the Architect or District.
- (c) Concrete shall test the minimum ultimate compressive strength in twenty-eight 28 days, as specified on the structural drawings.
- (d) In the event that the twenty-eight (28) day test falls below the minimum specified strength, the effective concrete in place shall be tested by taking cores in accordance with UBC Standard No. 26-13 and tested as required for cylinders.
- (e) In the event that the test on core specimens falls below the minimum specified strength, the concrete will be deemed defective and shall be removed and replaced upon such direction of the Architect, and in a manner acceptable to the Division of the State Architect.
- D. Reinforcing, Steel
- E. Structural Steel Per Title 24 and as noted:
 - (1) Material: Steel per Table in Title 24, Section 2712.
 - (2) Qualification of Welders (UBC Std. 27-6).
 - (3) Shop fabrication (Section 2712(d). Structural steel only).
 - (4) Shop and field welding (Section 2712(e)).

PART 3 - EXECUTION Not Used.

DOCUMENT 01 50 00

TEMPORARY FACILITIES AND CONTROLS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions;
- C. Site Standards; and
- D. Construction Waste Management and Disposal.

1.02 TEMPORARY UTILITIES:

- A. Electric Power and Lighting:
 - (1) Contractor will pay for power during the course of the Work. To the extent power is available in the building(s) or on the Site, Contractor may use the District's existing utilities by making prearranged payments to the District for the utilities used by Contractor and all Subcontractors. Contractor shall be responsible for providing temporary facilities required to deliver that power service from its existing location in the building(s) or on the Site to point of intended
 - (2) Contractor shall verify characteristics of power available in building(s) or on the Site. Contractor shall take all actions required to make modifications where power of higher voltage or different phases of current are required. Contractor shall be fully responsible for providing that service and shall pay all costs required therefor.
 - (3) Contractor shall furnish, wire for, install, and maintain temporary electrical lights wherever it is necessary to provide illumination for the proper performance and/or observation of the Work: a minimum of 20 foot-candles for rough work and 50 foot-candles for finish work.
 - (4) Contractor shall be responsible for maintaining existing lighting levels in the project vicinity should temporary outages or service interruptions occur.
- B. Heat and Ventilation:
 - (1) Contractor shall provide temporary heat to maintain environmental conditions to facilitate progress of the Work, to meet specified minimum conditions for the installation and curing of materials, and to

- protect materials and finishes from damage due to improper temperature and humidity conditions. Portable heaters shall be standard units complete with controls.
- (2) Contractor shall provide forced ventilation and dehumidification, as required, of enclosed areas for proper installation and curing of materials, to disperse humidity, and to prevent hazardous accumulations of dust, fumes, vapors, and gases.
- (3) Contractor shall pay the costs of installation, maintenance, operation, and removal of temporary heat and ventilation, including costs for fuel consumed, required for the performance of the Work.

C. Water:

- (1) Contractor shall pay for water used during the course of the Work. Contractor shall coordinate and pay for installation or use of water meter in compliance with local water agency requirements. To the extent water is then available in the building(s) or on the Site, Contractor may use the District's existing utilities by making prearranged payments to the District for the utilities used by Contractor and all Subcontractors. Contractor shall be responsible for providing temporary facilities required to deliver such utility service from its existing location in the building(s), on the Site, or other location approved by the local water agency, to point of intended use.
- (2) Contractor shall use backflow preventers on water lines at point of connection to District's water supply. Backflow preventers shall comply with requirements of Uniform Plumbing Code.
- (3) Contractor shall make potable water available for human consumption.

D. Sanitary Facilities:

- (1) Contractor shall provide sanitary temporary facilities in no fewer numbers than required by law and such additional facilities as may be directed by the Inspector for the use of all workers. The facilities shall be maintained in a sanitary condition at all times and shall be left at the Site until removal is directed by the Inspector or Contractor completes all other work at the Site.
- (2) Use of toilet facilities in the Work under construction shall not be permitted except by consent of the Inspector and the District.

E. Telephone Service:

- (1) Contractor shall arrange with local telephone service company for telephone service as required for the performance of the Work. Contractor shall, at a minimum, provide in its field office one line for telephone and one line for fax machine.
- (2) Contractor shall pay the costs for telephone and fax lines installation, maintenance, service, and removal.

F. Fire Protection:

- (1) Contractor shall provide and maintain fire extinguishers and other equipment for fire protection. Such equipment shall be designated for use for fire protection only and shall comply with all requirements of the California Fire, State Fire Marshall and/or its designee.
- (2) Where on-site welding and burning of steel is unavoidable, Contractor shall provide protection for adjacent surfaces.

G. Trash Removal:

(1) Contractor shall provide trash removal on a timely basis. Under no circumstance shall Contractor use District trash service.

H. Field Office:

- (1) If Contractor chooses to provide a field office, it shall be an acceptable construction trailer that is well-lit and ventilated. The construction trailer shall be equipped with shelves, desks, filing cabinet, chairs, and such other items of equipment needed. Trailer and equipment are the property of the Contractor and must be removed from the Site upon completion of the Work. Contractor may use the corridor adjacent to the construction area for an office area, if approved in writing by District.
- (2) Contractor shall provide any additional electric lighting and power required for the trailer. Contractor shall make adequate provisions for heating and cooling as required.

I. Temporary Facilities:

(1)

1.03 CONSTRUCTION AIDS:

A. Plant and Equipment:

- (1) Contractor shall furnish, operate, and maintain a complete plant for fabricating, handling, conveying, installing, and erecting materials and equipment; and for conveyances for transporting workers. Include elevators, hoists, debris chutes, and other equipment, tools, and appliances necessary for performance of the Work.
- (2) Contractor shall maintain plant and equipment in safe and efficient operating condition. Damages due to defective plant and equipment, and uses made thereof, shall be repaired by Contractor at no expense to the District.
- B. None of the District's tools and equipment shall be used by Contractor for the performance of the Work.

1.04 BARRIERS AND ENCLOSURES:

- A. Contractor shall obtain the District's written permission for locations and types of temporary barriers and enclosures, including fire-rated materials proposed for use, prior to their installation.
- B. Contractor shall provide and maintain temporary enclosures to prevent public entry and to protect persons using other buildings and portions of the Site and/or Premises, the public, and workers. Contractor shall also protect the Work and existing facilities from the elements, and adjacent construction and improvements, persons, and trees and plants from damage and injury from demolition and construction operations.
- C. Contractor shall provide site access to existing facilities for persons using other buildings and portions of the Site, the public, and for deliveries and other services and activities.
- D. Tree and Plant Protection:
 - (1) Contractor shall preserve and protect existing trees and plants on the Premises that are not designated or required to be removed, and those adjacent to the Premises.
 - (2) Contractor shall provide barriers to a minimum height of 4'-0" around drip line of each tree and plant, around each group of trees and plants, as applicable, in the proximity of demolition and construction operations, or as denoted on the Plans.
 - (3) Contractor shall not park trucks, store materials, perform Work or cross over landscaped areas. Contractor shall not dispose of paint thinners, water from cleaning, plastering or concrete operations, or other deleterious materials in landscaped areas, storm drain systems, or sewers. Plant materials damaged as a result of the performance of the Work shall, at the option of the District and at Contractor's expense, either be replaced with new plant materials equal in size to those damaged or by payment of an amount representing the value of the damaged materials as determined by the District.
 - (4) Contractor shall remove soil that has been contaminated during the performance of the Work by oil, solvents, and other materials which could be harmful to trees and plants, and replace with good soil, at Contractor's expense.
 - (5) Excavation around Trees:
 - (a) Excavation within drip lines of trees shall be done only where absolutely necessary and with written permission from the District.
 - (b) Where trenching for utilities is required within drip lines, tunneling under and around roots shall be by hand digging and shall be approved by the District. Main lateral roots and taproots shall not be cut. All roots 2 inches in diameter and

larger shall be tunneled under and heavily wrapped with wet burlap so as to prevent scarring or excessive drying. Smaller roots that interfere with installation of new work may be cut with prior approval by the District. Roots must first be cut with a Vermeer, or equivalent, root cutter prior to any trenching.

- (c) Where excavation for new construction is required within drip line of trees, hand excavation shall be employed to minimize damage to root system. Roots shall be relocated in backfill areas wherever possible. If encountered immediately adjacent to location of new construction, roots shall be cut approximately 6 inches back from new construction.
- (d) Approved excavations shall be carefully backfilled with the excavated materials approved for backfilling. Backfill shall conform to adjacent grades without dips, sunken areas, humps, or other surface irregularities. Do not use mechanical equipment to compact backfill. Tamp carefully using hand tools, refilling and tamping until Final Acceptance as necessary to offset settlement.
- (e) Exposed roots shall not be allowed to dry out before permanent backfill is placed. Temporary earth cover shall be provided, or roots shall be wrapped with four layers of wet, untreated burlap and temporarily supported and protected from damage until permanently relocated and covered with backfill.
- (f) Accidentally broken roots should be sawed cleanly 3 inches behind ragged end.

1.05 SECURITY:

The Contractor shall be responsible for project security for materials, tools, equipment, supplies, and completed and partially completed Work.

1.06 TEMPORARY CONTROLS:

- A. Noise Control:
 - (1) Contractor acknowledges that adjacent facilities may remain in operation during all or a portion of the Work period, and it shall take all reasonable precautions to minimize noise as required by applicable laws and the Contract Documents.
 - (2) Notice of proposed noisy operations, including without limitation, operation of pneumatic demolition tools, concrete saws, and other equipment, shall be submitted to the District a minimum of forty-eight (48) hours in advance of their performance.
- B. Noise and Vibration:
 - Equipment and impact tools shall have intake and exhaust mufflers.

(2) Contractor shall cooperate with District to minimize and/or cease the use of noisy and vibratory equipment if that equipment becomes objectionable by its longevity.

C. Dust and Dirt:

- (1) Contractor shall conduct demolition and construction operations to minimize the generation of dust and dirt, and prevent dust and dirt from interfering with the progress of the Work and from accumulating in the Work and adjacent areas including, without limitation, occupied facilities.
- (2) Contractor shall periodically water exterior demolition and construction areas to minimize the generation of dust and dirt.
- (3) Contractor shall ensure that all hauling equipment and trucks carrying loads of soil and debris shall have their loads sprayed with water or covered with tarpaulins, and as otherwise required by local and state ordinance.
- (4) Contractor shall prevent dust and dirt from accumulating on walks, roadways, parking areas, and planting, and from washing into sewer and storm drain lines.

D. Water:

(1) Contractor shall not permit surface and subsurface water, and other liquids, to accumulate in or about the vicinity of the Premises. Should accumulation develop, Contractor shall control the water or other liquid, and suitably dispose of it by means of temporary pumps, piping, drainage lines, troughs, ditches, dams, or other methods.

E. Pollution:

- (1) No burning of refuse, debris, or other materials shall be permitted on or in the vicinity of the Premises.
- (2) Contractor shall comply with applicable regulatory requirements and anti-pollution ordinances during the conduct of the Work including, without limitation, demolition, construction, and disposal operations.

F. Lighting:

(1) If portable lights are used after dark, all light must be located so as not to direct light into neighboring property.

1.07 **JOB SIGN(S)**:

A. General:

(1) Contractor shall provide and maintain a Project identification sign with the design, text, and colors designated by the District and/or the Design Professional; locate sign as approved by the District.

(2) Signs other than the specified Project sign and or signs required by law, for safety, or for egress, shall not be permitted, unless otherwise approved in advance by the District.

B. Materials:

- (1) Structure and Framing: Structurally sound, new or used wood or metal; wood shall be nominal 3/4-inch exterior grade plywood.
- (2) Sign Surface: Minimum 3/4-inch exterior grade plywood.
- (3) Rough Hardware: Galvanized.
- (4) Paint: Exterior quality, of type and colors selected by the District and/or the Design Professional.

C. Fabrication:

- (1) Contractor shall fabricate to provide smooth, even surface for painting.
- (2) Size: 4'-0" x 8'-0", unless otherwise indicated.
- (3) Contractor shall paint exposed surfaces of supports, framing, and surface material with exterior grade paint: one coat of primer and one coat of finish paint.
- (4) Text and Graphics: As indicated.

1.08 PUBLICITY RELEASES:

A. Contractor shall not release any information, story, photograph, plan, or drawing relating information about the Project to anyone, including press and other public communications medium, including, without limitation, on website(s) without the written permission of the District.

PART 2 - PRODUCTS Not used.

PART 3 – EXECUTION Not used.

DOCUMENT 01 50 13

CONSTRUCTION WASTE MANAGEMENT AND DISPOSAL

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions; and
- C. Temporary Facilities and Controls.

1.02 SECTION INCLUDES:

- A. Administrative and procedural requirements for the following:
 - (1) Salvaging non-hazardous construction waste.
 - (2) Recycling non-hazardous construction waste.
 - (3) Disposing of non-hazardous construction waste.

1.03 DEFINITIONS:

- A. Construction Waste: Building and site improvement materials and other solid waste resulting from construction, remodeling, renovation, or repair operations. Construction waste includes packaging.
- B. Demolition Waste: Building and site improvement materials resulting from demolition or selective demolition operations.
- C. Disposal: Removal off-site of demolition and construction waste and subsequent sale, recycling, reuse, or deposit in landfill or incinerator acceptable to authorities having jurisdiction.
- D. Recycle: Recovery of demolition or construction waste for subsequent processing in preparation for reuse.
- E. Salvage: Recovery of demolition or construction waste and subsequent sale or reuse in another facility.
- F. Salvage and Reuse: Recovery of demolition or construction waste and subsequent incorporation into the Work.

1.04 PERFORMANCE REQUIREMENTS:

A. General: Develop waste management plan that results in end-of Project rates for salvage/recycling of sixty-five percent (65%) by weight (or by volume, but not a combination) of total waste generated by the Work.

1.05 SUBMITTALS:

- A. Waste Management Plan: Submit waste management plan within 30 days of date established for commencement of the Work.
- B. Waste Reduction Progress Reports: Concurrent with each Application for Payment, submit copies of report. Include the following information:
 - (1) Material category.
 - (2) Generation point of waste.
 - (3) Total quantity of waste in tons or cubic yards.
 - (4) Quantity of waste salvaged, both estimated and actual in tons or cubic yards.
 - (5) Quantity of waste recycled, both estimated and actual in tons or cubic yards.
 - (6) Total quantity of waste recovered (salvaged plus recycled) in tons or cubic yards.
 - (7) Total quantity of waste recovered (salvaged plus recycled) as a percentage of total waste.
- C. Waste Reduction Calculations: Before request for final payment, submit copies of calculated end-of-Project rates for salvage, recycling, and disposal as a percentage of total waste generated by the Work.
- D. Records of Donations: Indicate receipt and acceptance of salvageable waste donated to individuals and organizations. Indicate whether organization is tax exempt.
- E. Records of Sales: Indicate receipt and acceptance of salvageable waste sold to individuals and organizations. Indicate whether organization is tax exempt.
- F. Recycling and Processing Facility Records: Indicate receipt and acceptance of recyclable waste by recycling and processing facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.
- G. Landfill and Incinerator Disposal Records: Indicate receipt and acceptance of waste by landfills and incinerator facilities licensed to accept them. Include manifests, weight tickets, receipts, and invoices.

- H. CHPS Submittal: CHPS letter template for Credit ME2.0 and ME2.1, signed by Contractor, tabulating total waste material, quantities diverted and means by which it is diverted, and statement that requirements for the credit have been met.
- I. Qualification Data: For Waste Management Coordinator.
- J. Statement of Refrigerant Recovery: Signed by refrigerant recovery technician responsible for recovering refrigerant, stating that all refrigerant that was present was recovered and that recovery was performed according to EPA regulations. Include name and address of technician and date refrigerant was recovered.
- K. Submittal procedures and quantities are specified in Document 01 33 00.

1.06 QUALITY ASSURANCE:

- A. Waste Management Coordinator Qualifications: LEED Accredited Professional by U.S. Green Building Council.
- B. Regulatory Requirements: Comply with hauling and disposal regulations of authorities having jurisdiction.
- C. Waste Management Conference: Conduct conference at Project site to comply with requirements. Review methods and procedures related to waste management including, but not limited to, the following:
 - (1) Review and discuss waste management plan including responsibilities of Waste Management Coordinator.
 - (2) Review requirements for documenting quantities of each type of waste and its disposition.
 - (3) Review and finalize procedures for materials separation and verify availability of containers and bins needed to avoid delays.
 - (4) Review procedures for periodic waste collection and transportation to recycling and disposal facilities.
 - (5) Review waste management requirements for each trade.

1.07 WASTE MANAGEMENT PLAN:

- A. General: Develop plan consisting of waste identification, waste reduction work plan, and cost/revenue analysis. Indicate quantities by weight or volume, but use same units of measurement throughout waste management plan.
- B. Waste Identification: Indicate anticipated types and quantities of site-clearing and construction waste generated by the Work. Include estimated quantities and assumptions for estimates.

- C. Waste Reduction Work Plan: List each type of waste and whether it will be salvaged, recycled, or disposed of in landfill or incinerator. Include points of waste generation, total quantity of each type of waste, quantity for each means of recovery, and handling and transportation procedures.
 - (1) Salvaged Materials for Reuse: For materials that will be salvaged and reused in this Project, describe methods for preparing salvaged materials before incorporation into the Work.
 - (2) Salvaged Materials for Sale: For materials that will be sold to individuals and organizations, include list of their names, addresses, and telephone numbers.
 - (3) Salvaged Materials for Donation: For materials that will be donated to individuals and organizations, include list of their names, addresses, and telephone numbers.
 - (4) Recycled Materials: Include list of local receivers and processors and type of recycled materials each will accept. Include names, addresses, and telephone numbers.
 - (5) Disposed Materials: Indicate how and where materials will be disposed of. Include name, address, and telephone number of each landfill and incinerator facility.
 - (6) Handling and Transportation Procedures: Include method that will be used for separating recyclable waste including sizes of containers, container labeling, and designated location on Project site where materials separation will be located.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION

3.01 PLAN IMPLEMENTATION:

- A. General: Implement approved waste management plan. Provide handling, containers, storage, signage, transportation, and other items as required to implement waste management plan during the entire duration of the Contract.
 - (1) Comply with Document 01 50 00 for operation, termination, and removal requirements.
- B. [Waste Management Coordinator: Engage a waste management coordinator to be responsible for implementing, monitoring, and reporting status of waste management work plan. Coordinator shall be present at Project site full time for duration of Project.]
- C. Training: Train workers, subcontractors, and suppliers on proper waste management procedures, as appropriate for the Work occurring at Project site.

- (1) Distribute waste management plan to everyone concerned within 3 days of submittal return.
- (2) Distribute waste management plan to entities when they first begin work on site. Review plan procedures and locations established for salvage, recycling, and disposal.
- D. Site Access and Temporary Controls: Conduct waste management operations to ensure minimum interference with roads, streets, walks, walkways, and other adjacent occupied and used facilities.
 - (1) Designate and label specific areas of Project site necessary for separating materials that are to be salvaged, recycled, reused, donated, and sold.
 - (2) Comply with Document 01 50 00 for controlling dust and dirt, environmental protection, and noise control.

3.02 RECYCLING CONSTRUCTION WASTE:

- A. General: Recycle paper and beverage containers used by on-site workers.
- B. Recycling Incentives: Revenues, savings, rebates, tax credits, and other incentives received for recycling waste materials shall accrue to the Contractor.
- C. Procedures: Separate recyclable waste from other waste materials, trash, and debris. Separate recyclable waste by type at Project site to the maximum extent practical.
 - (1) Provide appropriately marked containers or bins for controlling recyclable waste until they are removed from Project Site. Include list of acceptable and unacceptable materials at each container and bin.
 - (a) Inspect containers and bins for contamination and remove contaminated materials if found.
 - (2) Stockpile processed materials on site without intermixing with other materials. Place, grade, and shape stockpiles to drain surface water. Cover to prevent windblown dust.
 - (3) Stockpile materials away from construction area. Do not store within drip line of remaining trees.
 - (4) Store components off the ground and protect from the weather.
 - (5) Remove recyclable waste off District property and transport to recycling receiver or processor.

D. Packaging:

- (1) Cardboard and Boxes: Break down packaging into flat sheets. Bundle and store in a dry location.
- (2) Polystyrene Packaging: Separate and bag material.
- (3) Pallets: As much as possible, require deliveries using pallets to remove pallets from Project Site. For pallets that remain on Site, break down pallets into component wood pieces and comply with requirements for recycling wood.
- (4) Crates: Break down crates into component wood pieces and comply with requirements for recycling wood.
- E. Site-Clearing Wastes: Chip brush, branches, and trees on site.
- F. Wood Materials:
 - (1) Clean Cut-Offs of Lumber: Grind or chip into small pieces.
 - (2) Clean Sawdust: Bag sawdust that does not contain painted or treated wood.
- G. Gypsum Board: Stack large clean pieces on wood pallets and store in a dry location.
 - (1) Clean Gypsum Board: Grind scraps of clean gypsum board using small mobile chipper or hammer mill. Screen out paper after grinding.

3.03 DISPOSAL OF WASTE:

- A. General: Except for items or materials to be salvaged, recycled, or otherwise reused, remove waste materials from Project Site and legally dispose of them in a landfill or incinerator acceptable to authorities having jurisdiction.
 - (1) Except as otherwise specified, do not allow waste materials that are to be disposed of accumulate on site.
 - (2) Remove and transport debris in a manner that will prevent spillage on adjacent surfaces and areas.
- B. Burning: Do not burn waste materials.
- C. Disposal: Transport waste materials off District property and legally dispose of them.

DOCUMENT 01 64 00

OWNER-FURNISHED PRODUCTS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions;
- B. Special Conditions; and
- C. Materials and Equipment.

1.02 SECTION INCLUDES

- A. Requirements for the following:
 - (1) Installing Owner-furnished materials and equipment.
 - (2) Providing necessary utilities, connections and rough-ins.

1.03 DEFINITIONS

- A. Owner: District, who is providing/furnishing materials and equipment.
- B. Installing Contactor: Contractor, who is installing the materials and equipment furnished by the Owner.

1.04 PRODUCT DELIVERY, STORAGE, AND HANDLING

- A. Receive, store and handle products in accordance with the manufacturer's instructions.
- B. Protect equipment items as required to prevent damage during storage and construction.

PART 2 - PRODUCTS

2.01 GENERAL PRODUCT REQUIREMENTS

- A. Installing Contractor's Responsibilities:
 - (1) Verify mounting and utility requirements for Owner-furnished materials and equipment items.
 - (2) Provide mounting and utility rough in for all items where required.

- (a) Rough in locations, sizes, capacities, and similar type items shall be as indicated and required by product manufacturer.
- B. Owner and Installing Contractor(s) Responsibilities:
 - (1) Owner-Furnished/Contractor Installed ("OFCI"): Furnished by the Owner; installed by the Installing Contractor.
 - (a) General: Owner and Installing Contractor(s) will coordinate deliveries of materials and equipment to coincide with the construction schedule.
 - (b) Owner will furnish specified materials and equipment delivered to the site. Owner/vendor's representative shall be present on Site at the time of delivery to comply with the contract requirements and Specifications Section 01 43 00, Materials and Equipment, Article 1.04.
 - (c) The Owner furnishing specified materials and equipment is responsible to provide manufacturer guarantees as required by the Contract to the Installing Contractor.
 - (d) The Installing Contractor shall:
 - 1) Review, verify and accept the approved manufacturer's submittal/Shop Drawings for all materials and equipment required to be installed by the Installer Contractor and furnished by the Owner. Any discrepancies, including but not limited to possible space conflicts, should be brought to the attention of the Project Manager and/or Program Manager, if applicable.
 - 2) Coordinate timely delivery. Installing Contractor shall receive materials and equipment at Site when delivered and give written receipt at time of delivery, noting visible defects or omissions; if such declaration is not given, the Installing Contractor shall assume responsibility for such defects and omissions.
 - 3) Store materials and equipment until ready for installation and protect from loss and damage. Installing Contractor is responsible for providing adequate storage space.
 - 4) Coordinate with other bid package contractors and field measurement to ensure complete installation.
 - 5) Uncrate, assemble, and set in place.
 - 6) Provide adequate supports.
 - 7) Install materials and equipment in accordance with manufacturer's recommendations, instructions, and

Shop Drawings, supply labor and material required, and make mechanical, plumbing, and electrical connections required to operate equipment.

- 8) Be certified by equipment manufacturer for installation of the specific equipment supplied by the Owner.
- 9) Provide anchorage and/or bracing as required for seismic restraint per Title 24, UBC Standard 27-11 and all other applicable codes.
- 10) Provide the contract-required warranty and guarantee for all work, materials and equipment, and installation upon its completion and acceptance by the District. Guarantee includes all costs associated with the removal, shipping to and from the Site, and reinstallation of any equipment found to be defective.
- C. Compatibility with Space and Service Requirements:
 - (1) Equipment items shall be compatible with space limitations indicated and as shown on the Contract Documents and specified in other sections of the Specifications.
 - (2) Modifications to equipment items required to conform to space limitations specified for rough in shall not cause additional cost to the District.
- D. Manufacturer's printed descriptions, specifications, and instructions shall govern the Work unless specifically indicated or specified otherwise.

2.02 FURNISHED MATERIALS AND EQUIPMENT

A. All furnished materials and equipment are indicated or scheduled on the Contract Documents.

PART 3 - EXECUTION

3.01 INSTALLATION

- A. Install equipment items in accordance with the manufacturer's instructions.
- B. Set equipment items securely in place, rigidly or flexibly mounted in accordance with manufacturers' directions.
- C. Make electrical and mechanical connections as indicated and required.
- D. Touch-up and restore damaged or defaced finishes to the Owner's satisfaction.

3.02 CLEANING AND PROTECTION

A. Repair or replace items not acceptable to the Architect or Owner.

B. Upon completion of installation, clean equipment items in accordance with manufacturer's recommendations, and protect from damage until final acceptance of the Work by the Owner.

SECTION 01 66 00

PRODUCT DELIVERY, STORAGE AND HANDLING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Site Access, Conditions and Requirements;
- B. Special Conditions.

1.02 PRODUCTS

- A. Products are as defined in the General Conditions.
- B. Contractor shall not use and/or reuse materials and/or equipment removed from existing Premises, except as specifically permitted by the Contract Documents.
- C. Contractor shall provide interchangeable components of the same manufacturer, for similar components.

1.03 TRANSPORTATION AND HANDLING

- A. Contractor shall transport and handle Products in accordance with manufacturer's instructions.
- B. Contractor shall promptly inspect shipments to confirm that Products comply with requirements, quantities are correct, and products are undamaged.
- C. Contractor shall provide equipment and personnel to handle Products by methods to prevent soiling, disfigurement, or damage.

1.04 STORAGE AND PROTECTION

- A. Contractor shall store and protect Products in accordance with manufacturer's instructions, with seals and labels intact and legible. Contractor shall store sensitive products in weather-tight, climate controlled enclosures.
- B. For exterior storage of fabricated Products, Contractor shall place on sloped supports, above ground.
- C. Contractor shall provide off-site storage and protection when Site does not permit on-site storage or protection.
- D. Contractor shall cover products subject to deterioration with impervious sheet covering and provide ventilation to avoid condensation.

- E. Contractor shall store loose granular materials on solid flat surfaces in a well-drained area and prevent mixing with foreign matter.
- F. Contractor shall provide equipment and personnel to store Products by methods to prevent soiling, disfigurement, or damage.
- G. Contractor shall arrange storage of Products to permit access for inspection and periodically inspect to assure Products are undamaged and are maintained under specified conditions.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

DOCUMENT 01 71 23

FIELD ENGINEERING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Site Investigation, and Soils Investigation Report;
- B. Special Conditions;
- C. Site-Visit Certification.

1.02 REQUIREMENTS INCLUDED:

- A. Contractor shall provide and pay for field engineering services by a Californiaregistered engineer, required for the project, including, without limitations:
 - (1) Survey work required in execution of the Project.
 - (2) Civil or other professional engineering services specified, or required to execute Contractor's construction methods.

1.03 QUALIFICATIONS OF SURVEYOR OR ENGINEERS:

Contractor shall only use a qualified licensed engineer or registered land surveyor, to whom District makes no objection.

1.04 SURVEY REFERENCE POINTS:

- A. Existing basic horizontal and vertical control points for the Project are those designated on the Drawings.
- B. Contractor shall locate and protect control points prior to starting Site Work and preserve all permanent reference points during construction. In addition Contractor shall:
 - (1) Make no changes or relocation without prior written notice to District and Architect.
 - (2) Report to District and Architect when any reference point is lost or destroyed, or requires relocation because of necessary changes in grades or locations.
 - (3) Require surveyor to replace Project control points based on original survey control that may be lost or destroyed.

1.05 RECORDS:

Contractor shall maintain a complete, accurate log of all control and survey work as it progresses.

1.06 SUBMITTALS:

- A. Contractor shall submit name and address of Surveyor and Professional Engineer to District and Architect prior to its/their work on the Project.
- B. On request of District and Architect, Contractor shall submit documentation to verify accuracy of field engineering work, at no additional cost to the District.
- C. Contractor shall submit a certificate signed by registered engineer or surveyor certifying that elevations and locations of improvements are in conformance or nonconformance with Contract Documents.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION

3.01 COMPLIANCE WITH LAWS:

Contractor is responsible for meeting all applicable codes, OSHA, safety and shoring requirements.

3.02 NONCONFORMING WORK:

Contractor is responsible for any re-surveying required by correction of nonconforming work.

DOCUMENT 01 73 29

CUTTING AND PATCHING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Inspector, Inspections, and Tests, Integration of Work, Nonconforming Work, and Correction of Work, and Uncovering Work;
- B. Special Conditions;
- C. Hazardous Materials Procedures and Requirements;
- D. Hazardous Materials Certification;
- E. Lead-Based Paint Certification;
- F. Imported Materials Certification.

1.02 CUTTING AND PATCHING:

- A. Contractor shall be responsible for all cutting, fitting, and patching, including associated excavation and backfill, required to complete the Work or to:
 - (1) Make several parts fit together properly.
 - (2) Uncover portions of Work to provide for installation of ill-timed Work.
 - (3) Remove and replace defective Work.
 - (4) Remove and replace Work not conforming to requirements of Contract Documents.
 - (5) Remove Samples of installed Work as specified for testing.
 - (6) Provide routine penetrations of non-structural surfaces for installation of piping and electrical conduit.
 - (7) Attaching new materials to existing remodeling areas including painting (or other finishes) to match existing conditions.
- B. In addition to Contract requirements, upon written instructions from the District, Contractor shall uncover Work to provide for observations of covered Work in accordance with the Contract Documents; remove samples of installed materials for testing as directed by District; and remove Work to provide for alteration of existing Work.

C. Contractor shall not cut or alter Work, or any part of it, in such a way that endangers or compromises the integrity of the Work, the Project, or work of others.

1.03 SUBMITTALS:

- A. Prior to any cutting or alterations that may affect the structural safety of Project, or work of others, and well in advance of executing such cutting or alterations, Contractor shall submit written notice to District pursuant to the applicable notice provisions of the Contract Documents, requesting consent to proceed with the cutting or alteration, including the following:
 - (1) The work of the District or other trades.
 - (2) Structural value or integrity of any element of Project.
 - (3) Integrity or effectiveness of weather-exposed or weather-resistant elements or systems.
 - (4) Efficiency, operational life, maintenance or safety of operational elements.
 - (5) Visual qualities of sight-exposed elements.
- B. Contractor's Request shall also include:
 - (1) Identification of Project.
 - (2) Description of affected Work.
 - (3) Necessity for cutting, alteration, or excavations.
 - (4) Effects of Work on District, other trades, or structural or weatherproof integrity of Project.
 - (5) Description of proposed Work:
 - (a) Scope of cutting, patching, alteration, or excavation.
 - (b) Trades that will execute Work.
 - (c) Products proposed to be used.
 - (d) Extent of refinishing to be done.
 - (6) Alternates to cutting and patching.
 - (7) Cost proposal, when applicable.
 - (8) The scheduled date the Contractor intends to perform the Work and the duration of time to complete the Work.

(9) Written permission of District or other District contractor(s) whose work will be affected.

1.04 QUALITY ASSURANCE:

- A. Contractor shall ensure that cutting, fitting, and patching shall achieve security, strength, weather protection, appearance for aesthetic match, efficiency, operational life, maintenance, safety of operational elements, and the continuity of existing fire ratings.
- B. Contractor shall ensure that cutting, fitting, and patching shall successfully duplicate undisturbed adjacent profiles, materials, textures, finishes, colors, and that materials shall match existing construction. Where there is dispute as to whether duplication is successful or has been achieved to a reasonable degree, the District's decision shall be final.

1.05 PAYMENT FOR COSTS:

- A. Cost caused by ill-timed or defective Work or Work not conforming to Contract Documents, including costs for additional services of the District, its consultants, including but not limited to the Construction Manager, the Architect, the Project Inspector(s), Engineers, and Agents, will be paid by Contractor and/or deducted from the Contract by the District.
- B. District shall only pay for cost of Work if it is part of the original Contract Price or if a change has been made to the contract in compliance with the provisions of the General Conditions. Cost of Work performed upon instructions from the District, other than defective or nonconforming Work, will be paid by District on approval of written Change Order. Contractor shall provide written cost proposals prior to proceeding with cutting and patching.

PART 2 - PRODUCTS

2.01 MATERIALS:

- A. Contractor shall provide for replacement and restoration of Work removed. Contractor shall comply with the Contract Documents and with the Industry Standard(s), for the type of Work, and the Specification requirements for each specific product involved. If not specified, Contractor shall first recommend a product of a manufacturer or appropriate trade association for approval by the District.
- B. Materials to be cut and patched include those damaged by the performance of the Work.

PART 3 - EXECUTION

3.01 INSPECTION:

A. Contractor shall inspect existing conditions of the Site and the Work, including elements subject to movement or damage during cutting and patching, excavating and backfilling. After uncovering Work, Contractor shall inspect conditions affecting installation of new products.

B. Contractor shall report unsatisfactory or questionable conditions in writing to District as indicated in the General Conditions and shall proceed with Work as indicated in the General Conditions by District.

3.02 PREPARATION:

- A. Contractor shall provide shoring, bracing and supports as required to maintain structural integrity for all portions of the Project, including all requirements of the Project.
- B. Contractor shall provide devices and methods to protect other portions of Project from damage.
- C. Contractor shall, provide all necessary protection from weather and extremes of temperature and humidity for the Project, including without limitation, any work that may be exposed by cutting and patching Work. Contractor shall keep excavations free from water.

3.03 ERECTION, INSTALLATION AND APPLICATION:

- A. With respect to performance, Contractor shall:
 - (1) Execute fitting and adjustment of products to provide finished installation to comply with and match specified tolerances and finishes.
 - (2) Execute cutting and demolition by methods that will prevent damage to other Work, and provide proper surfaces to receive installation of repairs and new Work.
 - (3) Execute cutting, demolition excavating, and backfilling by methods that will prevent damage to other Work and damage from settlement.
- B. Contractor shall employ original installer or fabricator to perform cutting and patching for:
 - (1) Weather-exposed surfaces and moisture-resistant elements such as roofing, sheet metal, sealants, waterproofing, and other trades.
 - (2) Sight-exposed finished surfaces.
- C. Contractor shall execute fitting and adjustment of products to provide a finished installation to comply with specified products, functions, tolerances, and finishes as shown or specified in the Contract Documents including, without limitation, the Drawings and Specifications.
- D. Contractor shall fit Work airtight to pipes, sleeves, ducts, conduit, and other penetrations through surfaces. Contractor shall conform to all Code requirements for penetrations or the Drawings and Specifications, whichever calls for a higher quality or more thorough requirement. Contractor shall maintain integrity of both rated and non-rated fire walls, ceilings, floors, etc.
- E. Contractor shall restore Work which has been cut or removed. Contractor shall install new products to provide completed Work in accordance with

- requirements of the Contract Documents and as required to match surrounding areas and surfaces.
- F. Contractor shall refinish all continuous surfaces to nearest intersection as necessary to match the existing finish to any new finish.

DOCUMENT 01 76 00

ALTERATION PROJECT PROCEDURES

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Integration of Work, Purchase of Materials and Equipment, Uncovering of Work and Nonconforming Work and Correction of Work and Trenches;
- B. Special Conditions.

PART 2 - PRODUCTS

2.01 PRODUCTS FOR PATCHING AND EXTENDING WORK:

- A. New Materials: As specified in the Contract Documents including, without limitation, in the Specifications, Contractor shall match existing products, conditions, and work for patching and extending work.
- B. Type and Quality of Existing Products: Contractor shall determine by inspection, by testing products where necessary, by referring to existing conditions and to the Work as a standard.

PART 3 - EXECUTION

3.01 EXAMINATION:

- A. Contractor shall verify that demolition is complete and that areas are ready for installation of new Work.
- B. By beginning restoration Work, Contractor acknowledges and accepts the existing conditions.

3.02 PREPARATION:

- A. Contractor shall cut, move, or remove items as necessary for access to alterations and renovation Work. Contractor shall replace and restore these at completion.
- B. Contractor shall remove unsuitable material not as salvage unless otherwise indicated in the Contract Documents. Unsuitable material may include, without limitation, rotted wood, corroded metals, and deteriorated masonry and concrete. Contractor shall replace materials as specified for finished Work.

- C. Contractor shall remove debris and abandoned items from all areas of the Site and from concealed spaces.
- D. Contractor shall prepare surface and remove surface finishes to provide for proper installation of new Work and finishes.
- E. Contractor shall close openings in exterior surfaces to protect existing work from weather and extremes of temperature and humidity. Contractor shall insulate ductwork and piping to prevent condensation in exposed areas. Contractor shall insulate building cavities for thermal and/or acoustical protection, as detailed.

3.03 INSTALLATION:

- A. Contractor shall coordinate Work of all alternations and renovations to expedite completion and to accommodate District occupancy.
- B. Designated Areas and Finishes: Contractor shall complete all installations in all respects, including operational, mechanical work and electrical work.
- C. Contractor shall remove, cut, and patch Work in a manner to minimize damage and to provide a means of restoring Products and finishes to original or specified condition.
- D. Contractor shall refinish visible existing surfaces to remain in renovated rooms and spaces, to specified condition for each material, with a neat and square or straight transition to adjacent finishes.
- E. Contractor shall install products as specified in the Contract Documents, including without limitation, the Specifications.

3.04 TRANSITIONS:

- A. Where new Work abuts or aligns with existing, Contractor shall perform a smooth and even transition. Patched Work must match existing adjacent work in texture and appearance.
- B. When finished surfaces are cut so that a smooth transition with new Work is not possible, Contractor shall terminate existing surface along a straight line at a natural line of division and make a recommendation for resolution to the District and the Architect for review and approval.

3.05 ADJUSTMENTS:

- A. Where removal of partitions or walls results in adjacent spaces becoming one, Contractor shall rework floors, walls, and ceilings to a smooth plane without breaks, steps, or bulkheads.
- B. Where a change of plane of 1/4 inch or more occurs, Contractor shall submit a recommendation for providing a smooth transition to the District and the Architect for review and approval.

- C. Contractor shall trim and seal existing wood doors and shall trim and paint metal doors as necessary to clear new floor finish and refinish trim as required.
- D. Contractor shall fit Work at penetrations of surfaces.

3.06 REPAIR OF DAMAGED SURFACES:

- A. Contractor shall patch or replace portions of existing surfaces, which are damaged, lifted, discolored, or showing other imperfections, in the area where the Work is performed.
- B. Contractor shall repair substrate prior to patching finish.

3.07 CULTIVATED AREAS AND OTHER SURFACE IMPROVEMENTS:

- A. Cultivated or planted areas and other surface improvements which are damaged by actions of the Contractor shall be restored by Contractor to their original condition or better, where indicated.
- B. Contractor shall protect and replace, if damaged, all existing guard posts, barricades, and fences.
- C. Contractor shall give special attention to avoid damaging or killing trees, bushes and/or shrubs on the Premises and/or identified in the Contract Documents, including without limitation, the Drawings.

3.08 FINISHES:

- A. Contractor shall finish surfaces as specified in the Contract Documents, including without limitations, the provisions of all Divisions of the Specifications.
- B. Contractor shall finish patches to produce uniform finish and texture over entire area. When finish cannot be matched, Contractor shall refinish entire surface to nearest intersections.

3.09 CLEANING:

A. Contractor shall continually clean the Site and the Premises as indicated in the Contract Documents, including without limitation, the provisions in the General Conditions and the Specifications regarding cleaning.

DOCUMENT 01 77 00

CONTRACT CLOSEOUT AND FINAL CLEANING

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Completion of Work;
- B. Special Conditions;
- C. Temporary Facilities and Controls.

1.02 CLOSEOUT PROCEDURES

Contractor shall comply with all closeout provisions as indicated in the General Conditions.

1.03 FINAL CLEANING

- A. Contractor shall execute final cleaning prior to final inspection.
- B. Contractor shall clean interior and exterior glass and all surfaces exposed to view; remove temporary labels, tape, stains, and foreign substances, polish transparent and glossy surfaces, wax and polish new vinyl floor surfaces, vacuum carpeted and soft surfaces.
- C. Contractor shall clean equipment and fixtures to a sanitary condition.
- D. Contractor shall replace filters of operating equipment.
- E. Contractor shall clean debris from roofs, gutters, down spouts, and drainage systems.
- F. Contractor shall clean Site, sweep paved areas, and rake clean landscaped surfaces.
- G. Contractor shall remove waste and surplus materials, rubbish, and construction facilities from the Site and surrounding areas.

1.04 ADJUSTING

Contractor shall adjust operating products and equipment to ensure smooth and unhindered operation.

1.05 RECORD DOCUMENTS AND SHOP DRAWINGS

- A. Contractor shall legibly mark each item to record actual construction, including:
 - (1) Measured depths of foundation in relation to finish floor datum.
 - (2) Measured horizontal and vertical locations of underground utilities and appurtenances, referenced to permit surface improvements.
 - (3) Measured locations of internal utilities and appurtenances concealed in construction, referenced to visible and accessible features of the Work.
 - (4) Field changes of dimension and detail.
 - (5) Details not on original Contract Drawings
 - (6) Changes made by modification(s).
 - (7) References to related Shop Drawings and modifications.
- B. Contractor will provide one set of Record Drawings to District.
- C. Contractor shall submit all required documents to District and/or Architect prior to or with its final Application for Payment.

1.06 INSTRUCTION OF DISTRICT PERSONNEL

- A. Before final inspection, at agreed upon times, Contractor shall instruct District's designated personnel in operation, adjustment, and maintenance of products, equipment, and systems.
- B. For equipment requiring seasonal operation, Contractor shall perform instructions for other seasons within six months or by the change of season.
- C. Contractor shall use operation and maintenance manuals as basis for instruction. Contractor shall review contents of manual with personnel in detail to explain all aspects of operation and maintenance.
- D. Contractor shall prepare and insert additional data in Operation and Maintenance Manual when the need for such data becomes apparent during instruction.
- E. Contractor shall review contents of manual with personnel in detail to explain all aspects of operation and maintenance.

1.07 SPARE PARTS AND MAINTENANCE MATERIALS

A. Contractor shall provide products, spare parts, maintenance, and extra materials in quantities specified in the Specifications and in Manufacturer's recommendations.

B. Contractor shall provide District with all required Operation and Maintenance Data at one time. Partial or piecemeal submissions of Operation and Maintenance Data will not be accepted.

PART 2 - PRODUCTS Not Used.

PART 3 – EXECUTION Not Used.

DOCUMENT 01 78 23

OPERATION AND MAINTENANCE DATA

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Completion of the Work;
- B. Special Conditions.

1.02 QUALITY ASSURANCE:

Contractor shall prepare instructions and data by personnel experienced in maintenance and operation of described products.

1.03 FORMAT:

- A. Contractor shall prepare data in the form of an instructional manual entitled "OPERATIONS AND MAINTENANCE MANUAL & INSTRUCTIONS" ("Manual").
- B. Binders: Contractor shall use commercial quality, 8-1/2 by 11 inch, three-side rings, with durable plastic covers; two inch maximum ring size. When multiple binders are used, Contractor shall correlate data into related consistent groupings.
- C. Cover: Contractor shall identify each binder with typed or printed title "OPERATION AND MAINTENANCE MANUAL & INSTRUCTIONS"; and shall list title of Project and identify subject matter of contents.
- D. Contractor shall arrange content by systems process flow under section numbers and sequence of Table of Contents of the Contract Documents.
- E. Contractor shall provide tabbed fly leaf for each separate product and system, with typed description of product and major component parts of equipment.
- F. Text: The content shall include Manufacturer's printed data, or typewritten data on 24 pound paper.
- G. Drawings: Contractor shall provide with reinforced punched binder tab and shall bind in with text; folding larger drawings to size of text pages.

1.04 CONTENTS, EACH VOLUME:

A. Table of Contents: Contractor shall provide title of Project; names, addresses, and telephone numbers of the Architect, any engineers, subconsultants, Subcontractor(s), and Contractor with name of responsible parties; and schedule of products and systems, indexed to content of the volume.

- B. For Each Product or System: Contractor shall list names, addresses, and telephone numbers of Subcontractor(s) and suppliers, including local source of supplies and replacement parts.
- C. Product Data: Contractor shall mark each sheet to clearly identify specific products and component parts, and data applicable to installation. Delete inapplicable information.
- D. Drawings: Contractor shall supplement product data to illustrate relations of component parts of equipment and systems, to show control and flow diagrams. Contractor shall not use Project Record Documents as maintenance drawings.
- E. Text: Contractor shall include any and all information as required to supplement product data. Contractor shall provide logical sequence of instructions for each procedure, incorporating manufacturer's instructions.
- F. Warranties and Bonds: Contractor shall bind in one copy of each.

1.05 MANUAL FOR MATERIALS AND FINISHES:

- A. Building Products, Applied Materials, and Finishes: Contractor shall include product data, with catalog number, size, composition, and color and texture designations. Contractor shall provide information for re-ordering custom manufactured products.
- B. Instructions for Care and Maintenance: Contractor shall include Manufacturer's recommendations for cleaning agents and methods, precautions against detrimental agents and methods, and recommended schedule for cleaning and maintenance.
- C. Moisture Protection and Weather Exposed Products: Contractor shall include product data listing applicable reference standards, chemical composition, and details of installation. Contractor shall provide recommendations for inspections, maintenance, and repair.
- D. Additional Requirements: Contractor shall include all additional requirements as specified in the Specifications.
- E. Contractor shall provide a listing in Table of Contents for design data, with tabbed fly sheet and space for insertion of data.

1.06 MANUAL FOR EQUIPMENT AND SYSTEMS:

- A. Each Item of Equipment and Each System: Contractor shall include description of unit or system, and component parts and identify function, normal operating characteristics, and limiting conditions. Contractor shall include performance curves, with engineering data and tests, and complete nomenclature, and commercial number of replaceable parts.
- B. Panelboard Circuit Directories: Contractor shall provide electrical service characteristics, controls, and communications.

- C. Contractor shall include color coded wiring diagrams as installed.
- D. Operating Procedures: Contractor shall include start-up, break-in, and routine normal operating instructions and sequences. Contractor shall include regulation, control, stopping, shut-down, and emergency instructions. Contractor shall include summer, winter, and any special operating instructions.
- E. Maintenance Requirements: Contractor shall include routine procedures and guide for trouble-shooting; disassembly, repair, and reassembly instructions; and alignment, adjusting, balancing, and checking instructions.
- F. Contractor shall provide servicing and lubrication schedule, and list of lubricants required.
- G. Contractor shall include manufacturer's printed operation and maintenance instructions.
- H. Contractor shall include sequence of operation by controls manufacturer.
- I. Contractor shall provide original manufacturer's parts list, illustrations, assembly drawings, and diagrams required for maintenance.
- J. Contractor shall provide control diagrams by controls manufacturer as installed.
- K. Contractor shall provide Contractor's coordination drawings, with color coded piping diagrams as installed.
- L. Contractor shall provide charts of valve tag numbers, with location and function of each valve, keyed to flow and control diagrams.
- M. Contractor shall provide list of original manufacturer's spare parts, current prices, and recommended quantities to be maintained in storage.
- N. Additional Requirements: Contractor shall include all additional requirements as specified in Specification(s).
- O. Contractor shall provide a listing in Table of Contents for design data, with tabbed fly sheet and space for insertion of data.

1.07 SUBMITTAL:

- A. Contractor shall submit to the District for review two (2) copies of preliminary draft or proposed formats and outlines of the contents of the Manual within thirty (30) days of Contractor's start of Work.
- B. For equipment, or component parts of equipment put into service during construction and to be operated by District, Contractor shall submit draft content for that portion of the Manual within ten (10) days after acceptance of that equipment or component.

- C. Contractor shall submit two (2) copies of a complete Manual in final form prior to final Application for Payment. Copy will be returned with Architect/Engineer comments. Contractor must revise the content of the Manual as required by District prior to District's approval of Contractor's final Application for Payment.
- D. Contractor must submit two (2) copies of revised Manual in final form within ten (10) days after final inspection.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

END OF DOCUMENT

DOCUMENT 01 78 36

WARRANTIES

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Warranty/Guarantee Information;
- B. Special Conditions.

1.02 FORMAT

- A. Binders: Contractor shall use commercial quality, 8-1/2 by 11 inch, three-side rings, with durable plastic covers; two inch maximum ring size.
- B. Cover: Contractor shall identify each binder with typed or printed title "WARRANTIES" and shall list title of Project.
- C. Table of Contents: Contractor shall provide title of Project; name, address, and telephone number of Contractor and equipment supplier; and name of responsible principal. Contractor shall identify each item with the number and title of the specific Specification, document, provision, or section in which the name of the product or work item is specified.
- D. Contractor shall separate each warranty with index tab sheets keyed to the Table of Contents listing, providing full information and using separate typed sheets as necessary. Contractor shall list each applicable and/or responsible Subcontractor(s), supplier(s), and/or manufacturer(s), with name, address, and telephone number of each responsible principal(s).

1.03 PREPARATION:

- A. Contractor shall obtain warranties, executed in duplicate by each applicable and/or responsible subcontractor(s), supplier(s), and manufacturer(s), within ten (10) days after completion of the applicable item or work. Except for items put into use with District's permission, Contractor shall leave date of beginning of time of warranty blank until the date of completion is determined.
- B. Contractor shall verify that documents are in proper form, contain full information, and are notarized, when required.
- C. Contractor shall co-execute submittals when required.
- D. Contractor shall retain warranties until time specified for submittal.

1.04 TIME OF SUBMITTALS:

- A. For equipment or component parts of equipment put into service during construction with District's permission, Contractor shall submit a draft warranty for that equipment or component within ten (10) days after acceptance of that equipment or component.
- B. Contractor shall submit for District approval all warranties and related documents within ten (10) days after date of completion. Contractor must revise the warranties as required by the District prior to District's approval of Contractor's final Application for Payment.
- C. For items of work delayed beyond date of completion, Contractor shall provide an updated submittal within ten (10) days after acceptance, listing the date of acceptance as start of warranty period.

PART 2 - PRODUCTS Not Used.

PART 3 - EXECUTION Not Used.

END OF DOCUMENT

DOCUMENT 01 78 39

RECORD DOCUMENTS

PART 1 - GENERAL

1.01 RELATED DOCUMENTS AND PROVISIONS:

All Contract Documents should be reviewed for applicable provisions related to the provisions in this document, including without limitation:

- A. General Conditions, including, without limitation, Documents on Work;
- B. Special Conditions.

PART 2 - RECORD DRAWINGS

2.01 GENERAL:

- A. As indicated in the Contract Documents, the District will provide Contractor with one set of reproducible, full size original Contract Drawings (mylars).
- B. Contractor shall maintain at each Project Site one set of marked-up plans and shall transfer all changes and information to those marked-up plans, as often as required in the Contract Documents, but in no case less than once each month. Contractor shall submit to the Project Inspector one set of reproducible vellums of the Project Record Drawings ("As-Builts") showing all changes incorporated into the Work since the preceding monthly submittal. The As-Builts shall be available at the Project Site. The Contractor shall submit reproducible vellums at the conclusion of the Project following review of the blueline prints.
- C. Label and date each Record Drawing "RECORD DOCUMENT" in legibly printed letters.
- D. All deviations in construction, including but not limited to pipe and conduit locations and deviations caused by without limitation Change Orders, Construction Claim Directives, RFI's, and Addenda, shall be accurately and legibly recorded by Contractor.
- E. Locations and changes shall be done by Contractor in a neat and legible manner and, where applicable, indicated by drawing a "cloud" around the changed or additional information.

2.02 RECORD DRAWING INFORMATION:

- A. Contractor shall record the following information:
 - (1) Locations of Work buried under or outside each building, including, without limitation, all utilities, plumbing and electrical lines, and conduits.

- (2) Actual numbering of each electrical circuit to match panel schedule.
- (3) Locations of significant Work concealed inside each building whose general locations are changed from those shown on the Contract Drawings.
- (4) Locations of all items, not necessarily concealed, which vary from the Contract Documents.
- (5) Installed location of all cathodic protection anodes.
- (6) Deviations from the sizes, locations, and other features of installations shown in the Contract Documents.
- (7) Locations of underground work, points of connection with existing utilities, changes in direction, valves, manholes, catch basins, capped stubouts, invert elevations, etc.
- (8) Sufficient information to locate Work concealed in each building with reasonable ease and accuracy.

In some instances, this information may be recorded by dimension. In other instances, it may be recorded in relation to the spaces in the building near which it was installed.

- B. Contractor shall provide additional drawings as necessary for clarification.
- C. Contractor shall provide reproducible record drawings, made from final Shop Drawings marked "No Exceptions Taken" or "Approved as Noted."
- D. After review and approval of the marked-up specifications by the Project Inspector, Contractor shall provide electronic copies of the drawings (in PDF format) with one file with all of the sheets and one set of individual sheet files at the conclusion of the Project.

PART 3 - RECORD SPECIFICATIONS

3.01 GENERAL:

- A. Contractor shall mark each section legibly to record manufacturer, trade name, catalog number, and supplier of each Product and item of equipment actually installed.
- B. After review and approval of the marked-up specifications by the Project Inspector, Contractor shall provide one electronic copy of the specifications (in PDF format) at the conclusion of the Project.

PART 4 - MAINTENANCE OF RECORD DOCUMENTS

4.01 GENERAL

A. Contractor shall store Record Documents apart from documents used for construction as follows:

- (1) Provide files and racks for storage of Record Documents.
- (2) Maintain Record Documents in a clean, dry, legible condition and in good order.
- B. Contractor shall not use Record Documents for construction purposes.

PART 5 - PRODUCTS Not Used.

END OF DOCUMENT

Application Number: School Name: School District:

02-119978 Alice Birney Public Waldorf school Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:56:39

2019 CBC

IMPORTANT: This form is only a summary list of structural tests and some of the special inspections required for the project. Generally, the structural tests and special inspections noted on this form are those that will be performed by the Geotechnical Engineer of Record, Laboratory of Record, or Special Inspector. The actual complete test and inspection program must be performed as detailed on the DSA approved documents. The appendix at the bottom of this form identifies work NOT subject to DSA requirements for special inspection or structural testing. The project inspector is responsible for providing inspection of all facets of construction, including but not limited to, special inspections not listed on this form such as structural wood framing, high-load wood diaphragms, cold-formed steel framing, anchorage of non-structural components, etc., per Title 24, Part 2, Chapter 17A (2019 CBC).

**NOTE: Undefined section and table references found in this document are from the CBC, or California Building Code.

KEY TO COLUMNS

1. TYPE	2. PERFORMED BY
Continuous – Indicates that a continuous special inspection is required	GE – Indicates that the special inspection shall be performed by a registered geotechnical engineer or his or her authorized representative.
Periodic – Indicates that a periodic special inspection is required	LOR – Indicates that the test or special inspection shall be performed by a testing laboratory accepted in the DSA Laboratory Evaluation and Acceptance (LEA) Program. See CAC Section 4-335.
	PI – Indicates that the special inspection may be performed by a project inspector when specifically approved by DSA.
Test – Indicates that a test is required	SI – Indicates that the special inspection shall be performed by an appropriately qualified/approved special inspector.

Application Number:

School Name:

02-119978

DSA File Number:

34-53

Alice Birney Public Waldorf school

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

Geotechnical Reports: Project does NOT have and does NOT require a geotechnical report

	1. GENERAL:	Table 1705A.	Table 1705A.6		
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
V	 a. Verify that: Site has been prepared properly prior to placement of controlled fill and/or excavations for foundations. Foundation excavations are extended to proper depth and have reached proper material. Materials below footings are adequate to achieve the design bearing capacity. 	See Notes	PI	Refer to specific items identified in the Appendix listing exemptions for limitations. Placement of controlled fill exceeding 12" depth under foundations is not permitted without a geotechnical report.	

	2. SOIL COMPACTION AND FILL:	Table 1705A.6	Table 1705A.6			
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
V	a. Verify use of proper materials, densities and inspect lift thicknesses, placement and compaction during placement of fill.	Continuous	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.		
V	b. Compaction testing.	Test	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.		

	3. DRIVEN DEEP FOUNDATIONS (PILES):	Table 1705A.7
--	-------------------------------------	---------------

Application Number: School Name:

02-119978 Alice Birney Public Waldorf school Sacramento City Unified School District

DSA File Number: Date Created:

DSA File Number: Increment Number: Date Created: 34-53 2022-03-28 11:56:39

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Verify pile materials, sizes and lengths comply with the requirements.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
b. Determine capacities of test piles and conduct additional load tests as required.	Test	LOR*	* Under the supervision of the geotechnical engineer.
c. Inspect driving operations and maintain complete and accurate records for each pile.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
d. Verify locations of piles and their plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achieve design capacity, record tip and butt elevations and record any pile damage.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
e. Steel piles.	Provide tests a	nd inspection	s per STEEL section below.
f. Concrete piles and concrete filled piles.	Provide tests a	nd inspection	s per CONCRETE section below.
g. For specialty piles, perform additional inspections as determined by the registered design professional in responsible charge.	*	*	* As defined on drawings or specifications.
A CAST IN DI ACE DEED FOLINDATIONS (DIEDS).	Table 1705A.8	<u> </u>	
4. CAST-IN-PLACE DEEP FOUNDATIONS (PIERS):	Table 1705A.	•	
Test or Special Inspection	Туре	Performed	Code References and Notes

School District:

DGS DSA 103-19 (Revised 07/16/2020)

Ву

Application Number:

School Name:

02-119978

DSA File Number: 34-53

Alice Birney Public Waldorf school **Increment Number**:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 11:56:39

V	a. Inspect drilling operations and maintain complete and accurate records for each pier.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
	b. Verify pier locations, diameters, plumbness and lengths.Record concrete or grout volumes.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
✓	c. Concrete piers.	Provide tests and inspections per CONCRETE section below.		

5. RETAINING WALLS:				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Placement, compaction and inspection of backfill.	Continuous	GE*	1705A.6.1. * By geotechnical engineer or his or her qualified representative. (See Section 2 above).	
b. Placement of soil reinforcement and/or drainage devices.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.	
c. Segmental retaining walls; inspect placement of units, dowels, connectors, etc.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative. See DSA IR 16-3.	
d. Concrete retaining walls.	Provide tests and inspections per CONCRETE section below. Provide tests and inspections per MASONRY section below.			
e. Masonry retaining walls.				

6. OTHER SOILS:			
Test or Special Inspection	Туре	Performed By	Code References and Notes

Application Number:School Name:School District:02-119978Alice Birney Public Waldorf schoolSacramento City Unified School DistrictDSA File Number:Increment Number:Date Created:

a. Soil Improvements	Test	GE*	Submit a comprehensive report documenting final soil improvements constructed, construction observation and the results of the confirmation testing and analysis to CGS for final acceptance. * By geotechnical engineer or his or her qualified representative.
b. Inspection of Soil Improvements	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
c.			

2022-03-28 11:56:39

34-53

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13

Application Number: School Name:

02-119978

DSA File Number: 34-53

Alice Birney Public Waldorf school

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

	7. CAST-IN-PLACE CONCRETE				
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
Mate	rial Verification and Testing:				
V	a. Verify use of required design mix.	Periodic	SI	Table 1705A.3 Item 5, 1910A.1.	
V	b. Identifiy, sample, and test reinforcing steel.	Test	LOR	1910A.2 ; ACI 318-14 Section 26.6.1.2; DSA IR 17-10. (See Appendix for exemptions.)	
V	c. During concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	Test	LOR	Table 1705A.3 Item 6 ; ACI 318-14 Sections 26.5 & 26.12.	
V	d. Test concrete (f'c).	Test	LOR	1905A.1.15 ; ACI 318-14 Section 26.12.	
Inspe	ction:				
7	e. Batch plant inspection:	See Notes	SI	Default of 'Continuous' per 1705A.3.3. If approved by DSA, batch plant inspection may be reduced to 'Periodic' subject to requirements in Section 1705A.3.3.1, or eliminated per 1705A.3.3.2. (See Appendix for exemptions.)	
	f. Welding of reinforcing steel.	Provide spec	Provide special inspection per STEEL, Category 19.1(d) & (e) and/or 19.2(g) & (h) below.		

8. PRESTRESSED / POST-TENSIONED CONCRETE (in addition to Cast-in-Place Concrete tests and inspections)

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119978Alice Birney Public Waldorf schoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:56:39

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Sample and test prestressing tendons and anchorages.	Test	LOR	1705A.3.4, 1910A.3
b. Inspect placement of prestressing tendons.	Periodic	SI	1705A.3.4, Table 1705A.3 Items 1 & 9.
c. Verify in-situ concrete strength prior to stressing of post-tensioning tendons.	Periodic	SI	Table 1705A.3 Item 11. Special inspector to verify specified concrete strength test prior to stressing.
d. Inspect application of post-tensioning or prestressing forces and grouting of bonded prestressing tendons.	Continuous	SI	1705A.3.4, Table 1705A.3 Item 9 ; ACI 318-14 Section 26.13

9. PRECAST CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Inspect fabrication of precast concrete members.	Continuous	SI	ACI 318-14 Section 26.13.	
b. Inspect erection of precast concrete members.	Periodic	SI*	Table 1705A.3 Item 10. * May be performed by PI when specifically approved by DSA.	

10. SHOTCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119978Alice Birney Public Waldorf schoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:56:39

a. Inspect shotcrete placement for proper application techniques.	Continuous	SI	1705A.19, Table 1705A.3 Item 7, 1908A.6, 1908A.7, 1908A.8, 1908A.9, 1908A.11, 1908A.12. See ACI 506.2-13 Section 3.4, ACI 506R-16.
b. Sample and test shotcrete (f'c).	Test	LOR	1908A.5, 1908A.10.

	11. POST-INSTALLED ANCHORS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
7	a. Inspect installation of post-installed anchors	See Notes	SI*	1617A.1.19, Table 1705A.3 Item 4a (Continuous) & 4b (Periodic), 1705A.3.8 (See Appendix for exemptions). ACI 318-14 Sections 17.8 & 26.13. * May be performed by the project inspector when specifically approved by DSA.
7	b. Test post-installed anchors.	Test	LOR	1910A.5. (See Appendix for exemptions.)

12. OTHER CONCRETE:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a.			

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number: 02-119978

School Name:

Alice Birney Public Waldorf school

DSA File Number:

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 11:56:39

	17. STRUCTURAL STEEL, COLD-FORMED STEEL AND ALUMINUM USED FOR STRUCTURAL PURPOSES					
Mate	Material Verification and Testing:					
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
7	 a. Verify identification of all materials and: Mill certificates indicate material properties that comply with requirements. Material sizes, types and grades comply with requirements. 	Periodic	*	Table 1705A.2.1 Item 3a 3c. 2202A.1; AISI S100-16 Section A3.1 & A3.2, AISI S240-15 Section A3 & A5, AISI S220-15 Sections A4 & A6. * By special inspector or qualified technician when performed off-site.		
√	b . Test unidentified materials	Test	LOR	2202A.1.		
7	c. Examine seam welds of HSS shapes	Periodic	SI	DSA IR 17-3.		
Inspe	Inspection:					
V	d. Verify and document steel fabrication per DSA-approved construction documents.	Periodic	SI	Not applicable to cold-formed steel light-frame construction, except for trusses (1705A.2.4).		

	18. HIGH-STRENGTH BOLTS: RCSC 2014					
Mate	Material Verification and Testing of High-Strength Bolts, Nuts and Washers:					
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
V	a. Verify identification markings and manufacturer's certificates of compliance conform to ASTM standards specified in the DSA-approved documents.	Periodic	SI	Table 1705A.2.1 Items 1a & 1b, 2202A.1 ; AISC 360-16 Section A3.3, J3.1, and N3.2; RCSC 2014 Section 1.5 & 2.1; DSA IR 17-8 & DSA IR 17-9.		

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number: 02-119978

School Name:

Alice Birney Public Waldorf school

DSA File Number:

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

V	b. Test high-strength bolts, nuts and washers.	Test	LOR	Table 1705A.2.1 Item 1c, 2213A.1 ; RCSC 2014 Section 7.2; DSA IR 17-8.
Inspe	ction of High-Strength Bolt Installation:			
	c. Bearing-type ("snug tight") connections.	Periodic	SI	Table 1705A.2.1 Item 2a, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Section 9.1; DSA IR 17-9.
V	d. Pretensioned and slip-critical connections.	*	SI	Table 1705A.2.1 Items 2b & 2c, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Sections 9.2 & 9.3; DSA IR 17-9. * "Continuous" or "Periodic" depends on the tightening method used.

Vorif	19. WELDING:	1	num; AWS D1.	1 Items 4 & 5; AWS D1.1 and AWS D1.8 for structural steel; AWS 3 for cold-formed steel; AWS D1.4 for reinforcing steel; DSA IR 17-ons.)
verii	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Verify weld filler material identification markings per AWS designation listed on the DSA-approved documents and the WPS.	Periodic	SI	DSA IR 17-3.
V	b. Verify weld filler material manufacturer's certificate of compliance.	Periodic	SI	DSA IR 17-3.
V	c. Verify WPS, welder qualifications and equipment.	Periodic	SI	DSA IR 17-3.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

Alice Birney Public Waldorf school

DSA File Number: 34-53

02-119978

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

	19.1 SHOP WELDING:					
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
7	a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.		
V	b. Inspect single-pass fillet welds ≤ 5/16", floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Items 5a.5 & 5a.6 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.		
	c. Inspect welding of stairs and railing systems.	Periodic	SI	1705A.2.1 ; AISC 360-16 (and AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3.		
	d. Verification of reinforcing steel weldability other than ASTM A706.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.		
	e. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.		

19.2 FIELD WELDING:				
Test or Special Inspection	Type	Performed By	Code References and Notes	
a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.	
b. Inspect single-pass fillet welds ≤ 5/16".	Periodic	SI	Table 1705A.2.1 Item 5a.5 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.	

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

Alice Birney Public Waldorf school

DSA File Number: 34-53

02-119978

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

c. Inspect end-welded studs (ASTM A-108) installation (including bend test).	Periodic	SI	2213A.2 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1; DSA IR 17-3.
d. Inspect floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Item 5a.6 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.3; DSA IR 17-3.
e. Inspect welding of structural cold-formed steel.	Periodic	SI*	1705A.2.5; AWS D1.3; DSA IR 17-3. The quality control provisions of AISI S240-15 Chapter D shall also apply. * May be performed by the project inspector when specifically approved by DSA.
f. Inspect welding of stairs and railing systems.	Periodic	SI*	1705A.2.1 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3. * May be performed by the project inspector when specifically approved by DSA.
g. Verification of reinforcing steel weldability.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.
h. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.

20. NONDESTRUCTIVE TESTING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Ultrasonic	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119978Alice Birney Public Waldorf schoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:56:39

b. Magnetic Particle	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.
C.	Test	LOR	

21. STEEL JOISTS AND TRUSSES: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
		,	
a. Verify size, type and grade for all chord and web members as well as connectors and weld filler material; verify joist profile, dimensions and camber (if applicable); verify all weld locations, lengths and profiles; mark or tag each joist.	Continuous	SI	1705A.2.3; Table 1705A.2.3; AWS D1.1; DSA IR 22-3 for steel joists only. 1705A.2.4; AWS D1.3 for cold-formed steel trusses.

22. SPRAY APPLIED FIRE-PROOFING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Examine structural steel surface conditions, inspect application, take samples, measure thickness and verify compliance of all aspects of application with DSA-approved documents.	Periodic	SI	1705A.14.	
b. Test bond strength.	Test	LOR	1705A.14.6.	

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number: School Name: School District:

02-119978 Alice Birney Public Waldorf school Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 34-53 2022-03-28 11:56:39

			1	
	c. Test density.	Test	LOR	1705A.14.5.
	23. ANCHOR BOLTS AND ANCHOR RODS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
7	a. Anchor Bolts and Anchor Rods	Test	LOR	Sample and test anchor bolts and anchor rods not readily identifiable per procedures noted in DSA IR 17-11.
	b. Threaded rod not used for foundation anchorage.	Test	LOR	Sample and test threaded rods not readily identifiable per procedures noted in DSA IR 17-11.
	Other Steel			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
	a.			

Application Number: 02-119978 DSA File Number: 34-53 Application Number: 02-13978 DSA File Number: 02-13978 DSA File Number: 02-13978 Date Created: 2022-03-28 11:56:39

Exempt items given in DSA IR A-22 or the 2019 CBC (including DSA amendments) and those items identified below with a check mark by the design professional are NOT subject to DSA requirements for the structural tests / special inspections noted. Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall <

SOILS:
1. Deep foundations acting as a cantilever footing designed based on minimum allowable pressures per CBC Table 1806A.2 and having no geotechnical report for the following cases: A) free standing sign or scoreboard, B) cell or antenna towers and poles less than 35'-0" tall (e.g., lighting poles, flag poles, poles supporting open mesh fences, etc.), C) single-story structure with dead load less than 5 psf (e.g., open fabric shade structure), or D) covered walkway structure with an apex height less than 10'-0" above adjacent grade.
2. Shallow foundations, etc. are exempt from special inspections and testing by a Geotechnical Engineer for the following cases: A) buildings without a geotechnical report and meeting the exception item #1 criteria in CBC Section 1803A.2 supported by native soil (any excavation depth) or fill soil (not exceeding 12" depth per CBC Section 1804A.6), B) soil scarification/recompaction not exceeding 12" depth, C) native or fill soil supporting exterior non-structural flatwork (e.g., sidewalks, site concrete ramps, site stairs, parking lots, driveways, etc.), D) unpaved landscaping and playground areas, or E) utility trench backfill.
CONCRETE/MASONRY:
1. Post-installed anchors for the following: A) exempt non-structural components (e.g., mechanical, electrical, plumbing equipment - see item 7 for "Welding") given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) or B) interior nonstructural wall

DGS DSA 103-19 (Revised 07/16/2020)

in that section.

partitions meeting criteria listed in exempt item 3 for "Welding."

2. Concrete batch plant inspection is not required for items given in CBC Section 1705A.3.3.2 subject to the requirements and limitations

Application Number: 02-119978 DSA File Number: 34-53 Application Number: 02-2119978 Alice Birney Public Waldorf school Increment Number: 34-53 School District: Sacramento City Unified School District Date Created: 2022-03-28 11:56:39

3. Non-bearing non-shear masonry walls may be exempt from certain DSA masonry testing and special inspection items as allowed per DSA IR 21-1.16. Refer to construction documents for specific exemptions accordingly for each applicable wall condition.
4. Epoxy shear dowels in site flatwork and/or other non-structural concrete.
5. Testing of reinforcing bars is not required for items given in CBC Section 1910A.2 subject to the requirements and limitations in that section.

Welding:
1. Solid-clad and open-mesh gates with maximum leaf span or rolling section for rolling gates of 10' and apex height less than 8'-0" above lowest adjacent grade. When located above circulation or occupied space below, these gates are not located within 1.5x gate/fence height (max 8'-0") to the edge of floor or roof.
2. Handrails, guardrails, and modular or relocatable ramps associated with walking surfaces less than 30" above adjacent grade (excluding post base connections per the 'Exception' language in Section 1705A.2.1); fillet welds shall not be ground flush.
3. Non-structural interior cold-formed steel framing spanning less than 15'-0", such as in interior partitions, interior soffits, etc. supporting only self weight and light-weight finishes or adhered tile, masonry, stone, or terra cotta veneer no more than 5/8" thickness and apex less than 20'-0" in height and not over an exit way. Maximum tributary load to a member shall not exceed the equivalent of that occurring from a 10'x10' opening in a 15' tall wall for a header or king stud.
4. Manufactured support frames and curbs using hot rolled or cold-formed steel (i.e., light gauge) for mechanical, electrical, or plumbing equipment weighing less than 2000# (equipment only) (connections of such frames to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).
5. Manufactured components (e.g., Tolco, B-Line, Afcon, etc.) for mechanical, electrical, or plumbing hanger support and bracing (connections of such components to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).

Application Number: School Name: School District: 02-119978 School District: Sacramento City Unified School District

02-119978Alice Birney Public Waldorf schoolSacramento City Unified School DistriDSA File Number:Increment Number:Date Created:34-532022-03-28 11:56:39

6. TV Brackets, projector mounts with a valid listing (see DSA IR A-5) and recreational equipment (e.g., playground structures, basketball backstops, etc.) (connections of such elements to superstructure elements using welding will require special inspection as noted in selected item(s) for section 19, 19.1 and/or 19.2 located in the Steel/Aluminum category).
7. Any support for exempt non-structural components given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) meeting the following: A) when supported on a floor/roof, <400# and resulting composite center of mass (including component's center of mass) ≤4' above supporting floor/roof, B) when hung from a wall or roof/floor, <20# for discrete units or <5 plf for distributed systems.

Application Number:

School Name:

02-119978

Alice Birney Public Waldorf school

DSA File Number:

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 11:56:39

Name of Architect or Engineer in general responsible charge:

Jeffrey Grau


Name of Structural Engineer (When structural design has been delegated):

Signature of Architect or Structural Engineer:

Date:

03/28/22

Note: To facilitate DSA electronic mark-ups and identification stamp application, DSA recommends against using secured electronic or digital signatures.



DSA 103-19: LIST OF REQUIRED VERIFIED REPORTS, CBC 2019

Application Number:

School Name:

02-119978

Alice Birney Public Waldorf school

DSA File Number: 34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:56:39

- 1. Structural Testing and Inspection: Laboratory Verified Report Form DSA 291
- 2. Post-installed Anchors: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 3. Shop Welding Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 4. High-Strength Bolt Installation Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292

Application Number: School Name: School District:

02-119979 John Bidwell Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 12:00:09

2019 CBC

IMPORTANT: This form is only a summary list of structural tests and some of the special inspections required for the project. Generally, the structural tests and special inspections noted on this form are those that will be performed by the Geotechnical Engineer of Record, Laboratory of Record, or Special Inspector. The actual complete test and inspection program must be performed as detailed on the DSA approved documents. The appendix at the bottom of this form identifies work NOT subject to DSA requirements for special inspection or structural testing. The project inspector is responsible for providing inspection of all facets of construction, including but not limited to, special inspections not listed on this form such as structural wood framing, high-load wood diaphragms, cold-formed steel framing, anchorage of non-structural components, etc., per Title 24, Part 2, Chapter 17A (2019 CBC).

**NOTE: Undefined section and table references found in this document are from the CBC, or California Building Code.

KEY TO COLUMNS

1. TYPE	2. PERFORMED BY
Continuous – Indicates that a continuous special inspection is required	GE – Indicates that the special inspection shall be performed by a registered geotechnical engineer or his or her authorized representative.
Periodic – Indicates that a periodic special inspection is required	LOR – Indicates that the test or special inspection shall be performed by a testing laboratory accepted in the DSA Laboratory Evaluation and Acceptance (LEA) Program. See CAC Section 4-335.
	PI – Indicates that the special inspection may be performed by a project inspector when specifically approved by DSA.
Test – Indicates that a test is required	SI – Indicates that the special inspection shall be performed by an appropriately qualified/approved special inspector.

Application Number:

School Name:

02-119979

34-53

John Bidwell Elementary School

DSA File Number:

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

Geotechnical Reports: Project does NOT have and does NOT require a geotechnical report

	1. GENERAL:	Table 1705A.	able 1705A.6		
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
V	 a. Verify that: Site has been prepared properly prior to placement of controlled fill and/or excavations for foundations. Foundation excavations are extended to proper depth and have reached proper material. Materials below footings are adequate to achieve the design bearing capacity. 	See Notes	PI	Refer to specific items identified in the Appendix listing exemptions for limitations. Placement of controlled fill exceeding 12" depth under foundations is not permitted without a geotechnical report.	

	2. SOIL COMPACTION AND FILL:	Table 1705A.6	able 1705A.6		
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
V	a. Verify use of proper materials, densities and inspect lift thicknesses, placement and compaction during placement of fill.	Continuous	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.	
V	b. Compaction testing.	Test	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.	

	3. DRIVEN DEEP FOUNDATIONS (PILES):	Table 1705A.7
--	-------------------------------------	---------------

Application Number:

School Name:

02-119979

34-53

John Bidwell Elementary School

DSA File Number:

Increment Number:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 12:00:09

Test or Special Inspection	Туре	Performed By	Code References and Notes		
a. Verify pile materials, sizes and lengths comply with the requirements.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.		
b. Determine capacities of test piles and conduct additional load tests as required.	Test	LOR*	* Under the supervision of the geotechnical engineer.		
c. Inspect driving operations and maintain complete and accurate records for each pile.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.		
d. Verify locations of piles and their plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achieve design capacity, record tip and butt elevations and record any pile damage.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.		
e. Steel piles.	Provide tests a	nd inspection	s per STEEL section below.		
f. Concrete piles and concrete filled piles.	Provide tests a	nd inspection	s per CONCRETE section below.		
g. For specialty piles, perform additional inspections as determined by the registered design professional in responsible charge.	*	*	* As defined on drawings or specifications.		
4. CAST-IN-PLACE DEEP FOUNDATIONS (PIERS):	Table 1705A.8				
Test or Special Inspection	Туре	Performed	Code References and Notes		

DGS DSA 103-19 (Revised 07/16/2020)

Ву

Application Number:

School Name:

02-119979

√

c. Concrete piers.

John Bidwell Elementary School

DSA File Number: 34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

	a. Inspect drilling operations and maintain complete and accurate records for each pier.	Continuous	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
	b. Verify pier locations, diameters, plumbness and lengths.Record concrete or grout volumes.	Continuous	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for

limitations.

Provide tests and inspections per CONCRETE section below.

5. RETAINING WALLS:					
Test or Special Inspection	Туре	Performed By	Code References and Notes		
a. Placement, compaction and inspection of backfill.	Continuous	GE*	1705A.6.1. * By geotechnical engineer or his or her qualified representative. (See Section 2 above).		
b. Placement of soil reinforcement and/or drainage devices.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.		
c. Segmental retaining walls; inspect placement of units, dowels, connectors, etc.	Continuous	Continuous * By geotechnical engineer or his or her qualified representative. See DSA IR 16-3.			
d. Concrete retaining walls.	Provide tests and inspections per CONCRETE section below.				
e. Masonry retaining walls.	Provide tests a	Provide tests and inspections per MASONRY section below.			

6. OTHER SOILS:			
Test or Special Inspection	Туре	Performed By	Code References and Notes

Application Number:School Name:School District:02-119979John Bidwell Elementary SchoolSacramento City Unified School District

02-119979John Bidwell Elementary SchoolSacramento City UnitDSA File Number:Increment Number:Date Created:34-532022-03-28 12:00:09

	a. Soil Improvements	Test		Submit a comprehensive report documenting final soil improvements constructed, construction observation and the results of the confirmation testing and analysis to CGS for final acceptance. * By geotechnical engineer or his or her qualified representative.
	b. Inspection of Soil Improvements	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
	c.			

8. PRESTRESSED / POST-TENSIONED CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13

Application Number: School Name:

John Bidwell Elementary School

DSA File Number: 34-53

02-119979

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

	7. CAST-IN-PLACE CONCRETE					
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
Mate	rial Verification and Testing:					
V	a. Verify use of required design mix.	Periodic	SI	Table 1705A.3 Item 5, 1910A.1.		
7	b. Identifiy, sample, and test reinforcing steel.	Test	LOR	1910A.2 ; ACI 318-14 Section 26.6.1.2; DSA IR 17-10. (See Appendix for exemptions.)		
V	c. During concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	Test	LOR	Table 1705A.3 Item 6 ; ACI 318-14 Sections 26.5 & 26.12.		
V	d. Test concrete (f'c).	Test	LOR	1905A.1.15 ; ACI 318-14 Section 26.12.		
Inspe	ection:					
V	e. Batch plant inspection:	See Notes	SI	Default of 'Continuous' per 1705A.3.3. If approved by DSA, batch plant inspection may be reduced to 'Periodic' subject to requirements in Section 1705A.3.3.1, or eliminated per 1705A.3.3.2. (See Appendix for exemptions.)		
	f. Welding of reinforcing steel.	Provide spec	Provide special inspection per STEEL, Category 19.1(d) & (e) and/or 19.2(g) & (h) below.			

JGS DSA	103-10	(Ravisad)	07/16	/2020)

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119979John Bidwell Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 12:00:09

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Sample and test prestressing tendons and anchorages.	Test	LOR	1705A.3.4, 1910A.3
b. Inspect placement of prestressing tendons.	Periodic	SI	1705A.3.4, Table 1705A.3 Items 1 & 9.
c. Verify in-situ concrete strength prior to stressing of post-tensioning tendons.	Periodic	SI	Table 1705A.3 Item 11. Special inspector to verify specified concrete strength test prior to stressing.
d. Inspect application of post-tensioning or prestressing forces and grouting of bonded prestressing tendons.	Continuous	SI	1705A.3.4, Table 1705A.3 Item 9 ; ACI 318-14 Section 26.13

9. PRECAST CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):					
Test or Special Inspection	Туре	Performed By	Code References and Notes		
a. Inspect fabrication of precast concrete members.	Continuous	SI	ACI 318-14 Section 26.13.		
b. Inspect erection of precast concrete members.	Periodic	SI*	Table 1705A.3 Item 10. * May be performed by PI when specifically approved by DSA.		

10. SHOTCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119979John Bidwell Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 12:00:09

a. Inspect shotcrete placement for proper application techniques.	Continuous	SI	1705A.19, Table 1705A.3 Item 7, 1908A.6, 1908A.7, 1908A.8, 1908A.9, 1908A.11, 1908A.12. See ACI 506.2-13 Section 3.4, ACI 506R-16.
b. Sample and test shotcrete (f'c).	Test	LOR	1908A.5, 1908A.10.

	11. POST-INSTALLED ANCHORS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Inspect installation of post-installed anchors	See Notes	SI*	1617A.1.19, Table 1705A.3 Item 4a (Continuous) & 4b (Periodic), 1705A.3.8 (See Appendix for exemptions). ACI 318-14 Sections 17.8 & 26.13. * May be performed by the project inspector when specifically approved by DSA.
V	b. Test post-installed anchors.	Test	LOR	1910A.5. (See Appendix for exemptions.)

12. OTHER CONCRETE:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a.			

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

John Bidwell Elementary School

DSA File Number:

02-119979

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

	17. STRUCTURAL STEEL, COLD-FORMED STEEL AND ALUMINUM USED FOR STRUCTURAL PURPOSES						
Material Verification and Testing:							
	Test or Special Inspection	Туре	Performed By	Code References and Notes			
7	 a. Verify identification of all materials and: Mill certificates indicate material properties that comply with requirements. Material sizes, types and grades comply with requirements. 	Periodic	*	Table 1705A.2.1 Item 3a 3c. 2202A.1; AISI S100-16 Section A3.1 & A3.2, AISI S240-15 Section A3 & A5, AISI S220-15 Sections A4 & A6. * By special inspector or qualified technician when performed off-site.			
✓	b. Test unidentified materials	Test	LOR	2202A.1.			
✓	c. Examine seam welds of HSS shapes	Periodic	SI	DSA IR 17-3.			
Inspection:							
V	d. Verify and document steel fabrication per DSA-approved construction documents.	Periodic	SI	Not applicable to cold-formed steel light-frame construction, except for trusses (1705A.2.4).			

	18. HIGH-STRENGTH BOLTS: RCSC 2014					
Mate	Material Verification and Testing of High-Strength Bolts, Nuts and Washers:					
	Test or Special Inspection	Type	Performed By	Code References and Notes		
	a. Verify identification markings and manufacturer's certificates of compliance conform to ASTM standards specified in the DSA-approved documents.	Periodic	SI	Table 1705A.2.1 Items 1a & 1b, 2202A.1 ; AISC 360-16 Section A3.3, J3.1, and N3.2; RCSC 2014 Section 1.5 & 2.1; DSA IR 17-8 & DSA IR 17-9.		

Test

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

b. Test high-strength bolts, nuts and washers.

John Bidwell Elementary School

DSA File Number: 34-53

02-119979

Increment Number:

School District:

Sacramento City Unified School District

Table 1705A.2.1 Item 1c, 2213A.1; RCSC 2014 Section 7.2; DSA IR 17-8.

Date Created: 2022-03-28 12:00:09

Inspe	ction of High-Strength Bolt Installation:		•	
	c. Bearing-type ("snug tight") connections.	Periodic	SI	Table 1705A.2.1 Item 2a, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Section 9.1; DSA IR 17-9.
V	d. Pretensioned and slip-critical connections.	*	SI	Table 1705A.2.1 Items 2b & 2c, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Sections 9.2 & 9.3; DSA IR 17-9. * "Continuous" or "Periodic" depends on the tightening method used.
	19. WELDING:	1705A.2.5, Table 1705A.2.1 Items 4 & 5; AWS D1.1 and AWS D1.8 for structural steel; AWS D1.2 for Aluminum; AWS D1.3 for cold-formed steel; AWS D1.4 for reinforcing steel; DSA IR 17-3 (See Appendix for exemptions.)		
Verifi	cation of Materials, Equipment, Welders, etc.:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Verify weld filler material identification markings per AWS designation listed on the DSA-approved documents and the WPS.	Periodic	SI	DSA IR 17-3.
7	b. Verify weld filler material manufacturer's certificate of compliance.	Periodic	SI	DSA IR 17-3.
7	c. Verify WPS, welder qualifications and equipment.	Periodic	SI	DSA IR 17-3.

LOR

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

School District:

02-119979

John Bidwell Elementary School

Sacramento City Unified School District

DSA File Number: 34-53

Increment Number:

Date Created: 2022-03-28 12:00:09

	19.1 SHOP WELDING:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.
V	b. Inspect single-pass fillet welds ≤ 5/16", floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Items 5a.5 & 5a.6 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.
	c. Inspect welding of stairs and railing systems.	Periodic	SI	1705A.2.1 ; AISC 360-16 (and AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3.
	d. Verification of reinforcing steel weldability other than ASTM A706.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.
	e. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.

19.2 FIELD WELDING:			
Test or Special Inspection	Type	Performed By	Code References and Notes
a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.
b. Inspect single-pass fillet welds ≤ 5/16".	Periodic	SI	Table 1705A.2.1 Item 5a.5 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

02-119979 John

John Bidwell Elementary School

DSA File Number: 34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

c. Inspect end-welded studs (ASTM A-108) installation (including bend test).	Periodic	SI	2213A.2 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1; DSA IR 17-3.
d. Inspect floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Item 5a.6 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.3; DSA IR 17-3.
e. Inspect welding of structural cold-formed steel.	Periodic	SI*	1705A.2.5; AWS D1.3; DSA IR 17-3. The quality control provisions of AISI S240-15 Chapter D shall also apply. * May be performed by the project inspector when specifically approved by DSA.
f. Inspect welding of stairs and railing systems.	Periodic	SI*	1705A.2.1 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3. * May be performed by the project inspector when specifically approved by DSA.
g. Verification of reinforcing steel weldability.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.
h. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.

20. NONDESTRUCTIVE TESTING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Ultrasonic	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.

1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119979John Bidwell Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 12:00:09

b. Magnetic Particle	Test		1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.
c.	Test	LOR	

21. STEEL JOISTS AND TRUSSES: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
		,	
a. Verify size, type and grade for all chord and web members as well as connectors and weld filler material; verify joist profile, dimensions and camber (if applicable); verify all weld locations, lengths and profiles; mark or tag each joist.	Continuous	SI	1705A.2.3; Table 1705A.2.3; AWS D1.1; DSA IR 22-3 for steel joists only. 1705A.2.4; AWS D1.3 for cold-formed steel trusses.

22. SPRAY APPLIED FIRE-PROOFING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Examine structural steel surface conditions, inspect application, take samples, measure thickness and verify compliance of all aspects of application with DSA-approved documents.	Periodic	SI	1705A.14.	
b. Test bond strength.	Test	LOR	1705A.14.6.	

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number: School Name: School District:
02-119979 John Bidwell Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 12:00:09

	c. Test density.	Test	LOR	1705A.14.5.
	23. ANCHOR BOLTS AND ANCHOR RODS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
7	a. Anchor Bolts and Anchor Rods	Test	LOR	Sample and test anchor bolts and anchor rods not readily identifiable per procedures noted in DSA IR 17-11.
	b. Threaded rod not used for foundation anchorage.	Test	LOR	Sample and test threaded rods not readily identifiable per procedures noted in DSA IR 17-11.
	Other Steel			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
	a.			

Application Number: 02-119979 DSA File Number: 34-53 School Name: John Bidwell Elementary School Increment Number: 34-53 School District: Sacramento City Unified School District Date Created: 2022-03-28 12:00:09

Exempt items given in DSA IR A-22 or the 2019 CBC (including DSA amendments) and those items identified below with a check mark by the design professional are NOT subject to DSA requirements for the structural tests / special inspections noted. Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall <

SOILS:
1. Deep foundations acting as a cantilever footing designed based on minimum allowable pressures per CBC Table 1806A.2 and having no geotechnical report for the following cases: A) free standing sign or scoreboard, B) cell or antenna towers and poles less than 35'-0" tall (e.g., lighting poles, flag poles, poles supporting open mesh fences, etc.), C) single-story structure with dead load less than 5 psf (e.g., open fabric shade structure), or D) covered walkway structure with an apex height less than 10'-0" above adjacent grade.
2. Shallow foundations, etc. are exempt from special inspections and testing by a Geotechnical Engineer for the following cases: A) buildings without a geotechnical report and meeting the exception item #1 criteria in CBC Section 1803A.2 supported by native soil (any excavation depth) or fill soil (not exceeding 12" depth per CBC Section 1804A.6), B) soil scarification/recompaction not exceeding 12" depth, C) native or fill soil supporting exterior non-structural flatwork (e.g., sidewalks, site concrete ramps, site stairs, parking lots, driveways, etc.), D) unpaved landscaping and playground areas, or E) utility trench backfill.
CONCRETE/MASONRY:
1. Post-installed anchors for the following: A) exempt non-structural components (e.g., mechanical, electrical, plumbing equipment - see item 7 for "Welding") given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) or B) interior nonstructural wall partitions meeting criteria listed in exempt item 3 for "Welding."
2. Concrete batch plant inspection is not required for items given in CBC Section 1705A.3.3.2 subject to the requirements and limitations in that section.

Application Number: 02-119979 DSA File Number: 34-53 School Name: DSA File Number: 34-53 School District: Sacramento City Unified School District Date Created: 2022-03-28 12:00:09

3. Non-bearing non-shear masonry walls may be exempt from certain DSA masonry testing and special inspection items as allowed per DSA IR 21-1.16. Refer to construction documents for specific exemptions accordingly for each applicable wall condition.
4. Epoxy shear dowels in site flatwork and/or other non-structural concrete.
5. Testing of reinforcing bars is not required for items given in CBC Section 1910A.2 subject to the requirements and limitations in that section.

Welding:
1. Solid-clad and open-mesh gates with maximum leaf span or rolling section for rolling gates of 10' and apex height less than 8'-0" above lowest adjacent grade. When located above circulation or occupied space below, these gates are not located within 1.5x gate/fence height (max 8'-0") to the edge of floor or roof.
2. Handrails, guardrails, and modular or relocatable ramps associated with walking surfaces less than 30" above adjacent grade (excluding post base connections per the 'Exception' language in Section 1705A.2.1); fillet welds shall not be ground flush.
3. Non-structural interior cold-formed steel framing spanning less than 15'-0", such as in interior partitions, interior soffits, etc. supporting only self weight and light-weight finishes or adhered tile, masonry, stone, or terra cotta veneer no more than 5/8" thickness and apex less than 20'-0" in height and not over an exit way. Maximum tributary load to a member shall not exceed the equivalent of that occurring from a 10'x10' opening in a 15' tall wall for a header or king stud.
4. Manufactured support frames and curbs using hot rolled or cold-formed steel (i.e., light gauge) for mechanical, electrical, or plumbing equipment weighing less than 2000# (equipment only) (connections of such frames to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).
5. Manufactured components (e.g., Tolco, B-Line, Afcon, etc.) for mechanical, electrical, or plumbing hanger support and bracing (connections of such components to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).

Application Number: School Name: School District: 02-119979 School District: Sacramento City Unified School District

02-119979John Bidwell Elementary SchoolSacramento City Unified SDSA File Number:Increment Number:Date Created:34-532022-03-28 12:00:09

6. TV Brackets, projector mounts with a valid listing (see DSA IR A-5) and recreational equipment (e.g., playground structures, basketball backstops, etc.) (connections of such elements to superstructure elements using welding will require special inspection as noted in selected item(s) for section 19, 19.1 and/or 19.2 located in the Steel/Aluminum category).
7. Any support for exempt non-structural components given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) meeting the following: A) when supported on a floor/roof, <400# and resulting composite center of mass (including component's center of mass) ≤4' above supporting floor/roof, B) when hung from a wall or roof/floor, <20# for discrete units or <5 plf for distributed systems.

Application Number:

School Name:

02-119979

34-53

John Bidwell Elementary School

DSA File Number:

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

Name of Architect or Engineer in general responsible charge:

Jeffrey Grau


Name of Structural Engineer (When structural design has been delegated):

Signature of Architect or Structural Engineer:

Date:

03/28/22

Note: To facilitate DSA electronic mark-ups and identification stamp application, DSA recommends against using secured electronic or digital signatures.



DSA 103-19: LIST OF REQUIRED VERIFIED REPORTS, CBC 2019

Application Number:

School Name:

02-119979

John Bidwell Elementary School

DSA File Number: 34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 12:00:09

- 1. Structural Testing and Inspection: Laboratory Verified Report Form DSA 291
- 2. Post-installed Anchors: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 3. Shop Welding Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 4. High-Strength Bolt Installation Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292

Application Number: School Name: School District:

02-119977 Leataata Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:38:55

2019 CBC

IMPORTANT: This form is only a summary list of structural tests and some of the special inspections required for the project. Generally, the structural tests and special inspections noted on this form are those that will be performed by the Geotechnical Engineer of Record, Laboratory of Record, or Special Inspector. The actual complete test and inspection program must be performed as detailed on the DSA approved documents. The appendix at the bottom of this form identifies work NOT subject to DSA requirements for special inspection or structural testing. The project inspector is responsible for providing inspection of all facets of construction, including but not limited to, special inspections not listed on this form such as structural wood framing, high-load wood diaphragms, cold-formed steel framing, anchorage of non-structural components, etc., per Title 24, Part 2, Chapter 17A (2019 CBC).

**NOTE: Undefined section and table references found in this document are from the CBC, or California Building Code.

KEY TO COLUMNS

1. TYPE	2. PERFORMED BY
Continuous – Indicates that a continuous special inspection is required	GE – Indicates that the special inspection shall be performed by a registered geotechnical engineer or his or her authorized representative.
Periodic – Indicates that a periodic special inspection is required	LOR – Indicates that the test or special inspection shall be performed by a testing laboratory accepted in the DSA Laboratory Evaluation and Acceptance (LEA) Program. See CAC Section 4-335.
	PI – Indicates that the special inspection may be performed by a project inspector when specifically approved by DSA.
Test – Indicates that a test is required	SI – Indicates that the special inspection shall be performed by an appropriately qualified/approved special inspector.

Application Number:

School Name:

02-119977

34-53

Leataata Elementary School

DSA File Number:

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:38:55

Geotechnical Reports: Project does NOT have and does NOT require a geotechnical report

	1. GENERAL:	Table 1705A.	Table 1705A.6			
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
V	 a. Verify that: Site has been prepared properly prior to placement of controlled fill and/or excavations for foundations. Foundation excavations are extended to proper depth and have reached proper material. Materials below footings are adequate to achieve the design bearing capacity. 	See Notes	PI	Refer to specific items identified in the Appendix listing exemptions for limitations. Placement of controlled fill exceeding 12" depth under foundations is not permitted without a geotechnical report.		

	2. SOIL COMPACTION AND FILL:	Table 1705A.6	able 1705A.6		
	Test or Special Inspection	Type Performed Code References and Notes By		Code References and Notes	
7	a. Verify use of proper materials, densities and inspect lift thicknesses, placement and compaction during placement of fill.			* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.	
V	b. Compaction testing.	* Under the supervision of a geotechnical engineer or LOR's engine manager. Refer to specific items identified in the Appendix listing exemptions for limitations.			

	3. DRIVEN DEEP FOUNDATIONS (PILES):	Table 1705A.7
--	-------------------------------------	---------------

Application Number: School Name: School District:
02-119977 Leataata Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 34-53 2022-03-28 11:38:55

Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Verify pile materials, sizes and lengths comply with the requirements.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.	
b. Determine capacities of test piles and conduct additional load tests as required.	Test	LOR*	* Under the supervision of the geotechnical engineer.	
c. Inspect driving operations and maintain complete and accurate records for each pile.	Continuous	Continuous GE* * By geotechnical engineer or his or her qualified representative.		
d. Verify locations of piles and their plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achieve design capacity, record tip and butt elevations and record any pile damage.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.	
e. Steel piles.	Provide tests and inspections per STEEL section below.			
f. Concrete piles and concrete filled piles.	Provide tests a	Provide tests and inspections per CONCRETE section below.		
g. For specialty piles, perform additional inspections as determined by the registered design professional in responsible charge.	*	* * As defined on drawings or specifications.		
4. CAST-IN-PLACE DEEP FOUNDATIONS (PIERS):	Table 1705A.8	3		
Test or Special Inspection	Туре	Performed	Code References and Notes	

DGS DSA 103-19 (Revised 07/16/2020)

Ву

Application Number: School Name: School District:
02-119977 Leataata Elementary School Sacramento City Unified School District

DSA File Number: Date Created:
34-53 2022-03-28 11:38:55

V	a. Inspect drilling operations and maintain complete and accurate records for each pier.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
	b. Verify pier locations, diameters, plumbness and lengths.Record concrete or grout volumes.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
✓	c. Concrete piers.	Provide tests and inspections per CONCRETE section below.		

5. RETAINING WALLS:					
Test or Special Inspection	Code References and Notes				
a. Placement, compaction and inspection of backfill.	Continuous GE* 1705A.6.1. * By geotechnical engineer or his or her qualified representative. (See Section 2 above).		1705A.6.1. * By geotechnical engineer or his or her qualified representative. (See Section 2 above).		
b. Placement of soil reinforcement and/or drainage devices.	Continuous GE* * By geotechnical engineer or his or her qualified representative		* By geotechnical engineer or his or her qualified representative.		
c. Segmental retaining walls; inspect placement of units, dowels, connectors, etc.	* By geotechnical engineer or his or her qualified represent See DSA IR 16-3.		* By geotechnical engineer or his or her qualified representative. See DSA IR 16-3.		
d. Concrete retaining walls.	Provide tests and inspections per CONCRETE section below.				
e. Masonry retaining walls.	Provide tests and inspections per MASONRY section below.				

6. OTHER SOILS:			
Test or Special Inspection	Туре	Performed By	Code References and Notes

Application Number:	School Name:	School District:	
02-119977	Leataata Elementary School	Sacramento City Unified School District	
DSA File Number:	Increment Number:	Date Created:	
34-53		2022-03-28 11:38:55	

	a. Soil Improvements	Test		Submit a comprehensive report documenting final soil improvements constructed, construction observation and the results of the confirmation testing and analysis to CGS for final acceptance. * By geotechnical engineer or his or her qualified representative.
	b. Inspection of Soil Improvements	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
	c.			

8. PRESTRESSED / POST-TENSIONED CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13

Application Number: School Name:

02-119977 Leataata Elementary School **DSA File Number:**

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:38:55

	7. CAST-IN-PLACE CONCRETE				
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
Mate	rial Verification and Testing:				
V	a. Verify use of required design mix.	Periodic	SI	Table 1705A.3 Item 5, 1910A.1.	
7	b. Identifiy, sample, and test reinforcing steel.	Test	LOR	1910A.2 ; ACI 318-14 Section 26.6.1.2; DSA IR 17-10. (See Appendix for exemptions.)	
V	c. During concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	Test	LOR	Table 1705A.3 Item 6 ; ACI 318-14 Sections 26.5 & 26.12.	
V	d. Test concrete (f'c).	Test	LOR	1905A.1.15 ; ACI 318-14 Section 26.12.	
Inspe	ction:				
7	e. Batch plant inspection:	See Notes	SI	Default of 'Continuous' per 1705A.3.3. If approved by DSA, batch plant inspection may be reduced to 'Periodic' subject to requirements in Section 1705A.3.3.1, or eliminated per 1705A.3.3.2. (See Appendix for exemptions.)	
	f. Welding of reinforcing steel. Provide special inspection per STEEL, Category 19.1(d) & (e) and/or 19.2(g) & (h) below.				

DGS DSA	103-19	(Revised	07/1	6/2020

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119977Leataata Elementary SchoolSacramento City Unified School DistrictDSA File Number:Increment Number:Date Created:34-532022-03-28 11:38:55

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Sample and test prestressing tendons and anchorages.	Test	LOR	1705A.3.4, 1910A.3
b. Inspect placement of prestressing tendons.	Periodic	SI	1705A.3.4, Table 1705A.3 Items 1 & 9.
c. Verify in-situ concrete strength prior to stressing of post-tensioning tendons.	Periodic	SI	Table 1705A.3 Item 11. Special inspector to verify specified concrete strength test prior to stressing.
d. Inspect application of post-tensioning or prestressing forces and grouting of bonded prestressing tendons.	Continuous	SI	1705A.3.4 , Table 1705A.3 Item 9 ; ACI 318-14 Section 26.13

9. PRECAST CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Inspect fabrication of precast concrete members.	Continuous	SI	ACI 318-14 Section 26.13.	
b. Inspect erection of precast concrete members.	Periodic	SI*	Table 1705A.3 Item 10. * May be performed by PI when specifically approved by DSA.	

10. SHOTCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13						
Application Number:	School Name:	School District:				
02-119977	Leataata Elementary School	Sacramento City Unified School District				
DSA File Number:	Increment Number:	Date Created:				
34-53		2022-03-28 11:38:55				

a. Inspect shotcrete placement for proper application techniques.	Continuous	SI	1705A.19, Table 1705A.3 Item 7, 1908A.6, 1908A.7, 1908A.8, 1908A.9, 1908A.11, 1908A.12. See ACI 506.2-13 Section 3.4, ACI 506R-16.
b. Sample and test shotcrete (f'c).	Test	LOR	1908A.5, 1908A.10.

	11. POST-INSTALLED ANCHORS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Inspect installation of post-installed anchors	See Notes	SI*	1617A.1.19, Table 1705A.3 Item 4a (Continuous) & 4b (Periodic), 1705A.3.8 (See Appendix for exemptions). ACI 318-14 Sections 17.8 & 26.13. * May be performed by the project inspector when specifically approved by DSA.
7	b. Test post-installed anchors.	Test	LOR	1910A.5. (See Appendix for exemptions.)

12. OTHER CONCRETE:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a.			

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

School District: Leataata Elementary School

DSA File Number: 34-53

02-119977

Increment Number:

Sacramento City Unified School District

Date Created: 2022-03-28 11:38:55

Material Verification and Testing:						
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
V	 a. Verify identification of all materials and: Mill certificates indicate material properties that comply with requirements. Material sizes, types and grades comply with requirements. 	Periodic	*	Table 1705A.2.1 Item 3a 3c. 2202A.1; AISI S100-16 Section A3.1 & A3.2, AISI S240-15 Section A3 & A5, AISI S220-15 Sections A4 & A6. * By special inspector or qualified technician when performed off-site.		
V	b. Test unidentified materials	Test	LOR	2202A.1.		
/	c. Examine seam welds of HSS shapes	Periodic	SI	DSA IR 17-3.		
Inspection:						
	d. Verify and document steel fabrication per DSA-approved construction documents.	Periodic	SI	Not applicable to cold-formed steel light-frame construction, except for trusses (1705A.2.4).		

		18. HIGH-STRENGTH BOLTS: RCSC 2014				
M	Material Verification and Testing of High-Strength Bolts, Nuts and Washers:					
		Test or Special Inspection	Туре		Code References and Notes	
				Ву		
		a. Verify identification markings and manufacturer's certificates of compliance conform to ASTM standards specified in the DSA-approved documents.	Periodic	SI	Table 1705A.2.1 Items 1a & 1b, 2202A.1 ; AISC 360-16 Section A3.3, J3.1, and N3.2; RCSC 2014 Section 1.5 & 2.1; DSA IR 17-8 & DSA IR 17-9.	

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

DSA File Number:

02-119977

34-53

School Name:

Leataata Elementary School
Increment Number:

School District:

1705A 2.5 Table 1705A 2.1 Items 4.8.5. AMS D1.1 and AMS D1.9 for structural stool: AMS

DSA IR 17-3.

DSA IR 17-3.

Sacramento City Unified School District

Date Created: 2022-03-28 11:38:55

V	b. Test high-strength bolts, nuts and washers.	Test	LOR	Table 1705A.2.1 Item 1c, 2213A.1 ; RCSC 2014 Section 7.2; DSA IR 17-8.	
Inspection of High-Strength Bolt Installation:					
	c. Bearing-type ("snug tight") connections.	Periodic	SI	Table 1705A.2.1 Item 2a, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Section 9.1; DSA IR 17-9.	
V	d. Pretensioned and slip-critical connections.	*	SI	Table 1705A.2.1 Items 2b & 2c, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Sections 9.2 & 9.3; DSA IR 17-9. * "Continuous" or "Periodic" depends on the tightening method used.	

	19. WELDING.	D1.2 for Alumii	D1.2 for Aluminum; AWS D1.3 for cold-formed steel; AWS D1.4 for reinforcing steel; DSA IR 17-3 (See Appendix for exemptions.)				
Verif	Verification of Materials, Equipment, Welders, etc.:						
	Test or Special Inspection	Туре	Performed By	Code References and Notes			
V	a. Verify weld filler material identification markings per AWS designation listed on the DSA-approved documents and the WPS.	Periodic	SI	DSA IR 17-3.			

SI

SI

Periodic

Periodic

DGS DSA 103-19 (Revised 07/16/2020)

compliance.

b. Verify weld filler material manufacturer's certificate of

c. Verify WPS, welder qualifications and equipment.

√

10 WEI DING:

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

02-119977 Leataata Elementary School

School District: Sacramento City Unified School District

DSA File Number: 34-53

Increment Number:

Date Created: 2022-03-28 11:38:55

	19.1 SHOP WELDING:					
	Test or Special Inspection	Туре	Performed By	Code References and Notes		
V	a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.		
V	b. Inspect single-pass fillet welds ≤ 5/16", floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Items 5a.5 & 5a.6 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.		
	c. Inspect welding of stairs and railing systems.	Periodic	SI	1705A.2.1 ; AISC 360-16 (and AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3.		
	d. Verification of reinforcing steel weldability other than ASTM A706.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.		
	e. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.		

19.2 FIELD WELDING:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
		-5	
a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.
b. Inspect single-pass fillet welds ≤ 5/16".	Periodic	SI	Table 1705A.2.1 Item 5a.5 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number: Sch

School Name:

School District:

02-119977 **DSA File Number**:

34-53

Leataata Elementary School **Increment Number**:

Sacramento City Unified School District

Date Created: 2022-03-28 11:38:55

c. Inspect end-welded studs (ASTM A-108) installation (including bend test).	Periodic	SI	2213A.2 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1; DSA IR 17-3.
d. Inspect floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Item 5a.6 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.3; DSA IR 17-3.
e. Inspect welding of structural cold-formed steel.	Periodic	SI*	1705A.2.5; AWS D1.3; DSA IR 17-3. The quality control provisions of AISI S240-15 Chapter D shall also apply. * May be performed by the project inspector when specifically approved by DSA.
f. Inspect welding of stairs and railing systems.	Periodic	SI*	1705A.2.1 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3. * May be performed by the project inspector when specifically approved by DSA.
g. Verification of reinforcing steel weldability.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.
h. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.

20. NONDESTRUCTIVE TESTING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Ultrasonic	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.

1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119977Leataata Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:38:55

b. Magnetic Particle	Test		1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.
c.	Test	LOR	

21. STEEL JOISTS AND TRUSSES: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
		,	
a. Verify size, type and grade for all chord and web members as well as connectors and weld filler material; verify joist profile, dimensions and camber (if applicable); verify all weld locations, lengths and profiles; mark or tag each joist.	Continuous	SI	1705A.2.3; Table 1705A.2.3; AWS D1.1; DSA IR 22-3 for steel joists only. 1705A.2.4; AWS D1.3 for cold-formed steel trusses.

22. SPRAY APPLIED FIRE-PROOFING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Examine structural steel surface conditions, inspect application, take samples, measure thickness and verify compliance of all aspects of application with DSA-approved documents.	Periodic	SI	1705A.14.
b. Test bond strength.	Test	LOR	1705A.14.6.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119977Leataata Elementary SchoolSacramento City Unified School DistrictDSA File Number:Increment Number:Date Created:34-532022-03-28 11:38:55

	c. Test density.	Test	LOR	1705A.14.5.
	23. ANCHOR BOLTS AND ANCHOR RODS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Anchor Bolts and Anchor Rods	Test	LOR	Sample and test anchor bolts and anchor rods not readily identifiable per procedures noted in DSA IR 17-11.
	b. Threaded rod not used for foundation anchorage.	Test	LOR	Sample and test threaded rods not readily identifiable per procedures noted in DSA IR 17-11.
	Other Steel			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
	a.			

Application Number: 02-119977 DSA File Number: 34-53 Application Number: 02-219977 DSA File Number: 02-119977 DSA File Number: 02-119977 Date Created: 2022-03-28 11:38:55

Exempt items given in DSA IR A-22 or the 2019 CBC (including DSA amendments) and those items identified below with a check mark by the design professional are NOT subject to DSA requirements for the structural tests / special inspections noted. Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall <

SOILS:
1. Deep foundations acting as a cantilever footing designed based on minimum allowable pressures per CBC Table 1806A.2 and having no geotechnical report for the following cases: A) free standing sign or scoreboard, B) cell or antenna towers and poles less than 35'-0" tall (e.g., lighting poles, flag poles, poles supporting open mesh fences, etc.), C) single-story structure with dead load less than 5 psf (e.g., open fabric shade structure), or D) covered walkway structure with an apex height less than 10'-0" above adjacent grade.
2. Shallow foundations, etc. are exempt from special inspections and testing by a Geotechnical Engineer for the following cases: A) buildings without a geotechnical report and meeting the exception item #1 criteria in CBC Section 1803A.2 supported by native soil (any excavation depth) or fill soil (not exceeding 12" depth per CBC Section 1804A.6), B) soil scarification/recompaction not exceeding 12" depth, C) native or fill soil supporting exterior non-structural flatwork (e.g., sidewalks, site concrete ramps, site stairs, parking lots, driveways, etc.), D) unpaved landscaping and playground areas, or E) utility trench backfill.
CONCRETE/MASONRY:
1. Post-installed anchors for the following: A) exempt non-structural components (e.g., mechanical, electrical, plumbing equipment - see item 7 for "Welding") given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) or B) interior nonstructural wall partitions meeting criteria listed in exempt item 3 for "Welding."
2. Concrete batch plant inspection is not required for items given in CBC Section 1705A.3.3.2 subject to the requirements and limitations

DGS DSA 103-19 (Revised 07/16/2020)

in that section.

3. Non-bearing non-shear masonry walls may be exempt from certain DSA masonry testing and special inspection items as allowed per DSA IR 21-1.16. Refer to construction documents for specific exemptions accordingly for each applicable wall condition.
4. Epoxy shear dowels in site flatwork and/or other non-structural concrete.
5. Testing of reinforcing bars is not required for items given in CBC Section 1910A.2 subject to the requirements and limitations in that section.

Welding:
1. Solid-clad and open-mesh gates with maximum leaf span or rolling section for rolling gates of 10' and apex height less than 8'-0" above lowest adjacent grade. When located above circulation or occupied space below, these gates are not located within 1.5x gate/fence height (max 8'-0") to the edge of floor or roof.
2. Handrails, guardrails, and modular or relocatable ramps associated with walking surfaces less than 30" above adjacent grade (excluding post base connections per the 'Exception' language in Section 1705A.2.1); fillet welds shall not be ground flush.
3. Non-structural interior cold-formed steel framing spanning less than 15'-0", such as in interior partitions, interior soffits, etc. supporting only self weight and light-weight finishes or adhered tile, masonry, stone, or terra cotta veneer no more than 5/8" thickness and apex less than 20'-0" in height and not over an exit way. Maximum tributary load to a member shall not exceed the equivalent of that occurring from a 10'x10' opening in a 15' tall wall for a header or king stud.
4. Manufactured support frames and curbs using hot rolled or cold-formed steel (i.e., light gauge) for mechanical, electrical, or plumbing equipment weighing less than 2000# (equipment only) (connections of such frames to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).
5. Manufactured components (e.g., Tolco, B-Line, Afcon, etc.) for mechanical, electrical, or plumbing hanger support and bracing (connections of such components to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).

6. TV Brackets, projector mounts with a valid listing (see DSA IR A-5) and recreational equipment (e.g., playground structures, basketball backstops, etc.) (connections of such elements to superstructure elements using welding will require special inspection as noted in selected item(s) for section 19, 19.1 and/or 19.2 located in the Steel/Aluminum category).
7. Any support for exempt non-structural components given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) meeting the following: A) when supported on a floor/roof, <400# and resulting composite center of mass (including component's center of mass) ≤4' above supporting floor/roof, B) when hung from a wall or roof/floor, <20# for discrete units or <5 plf for distributed systems.

Application Number: School Name: School District:

02-119977 Leataata Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:38:55

Name of Architect or Engineer in general responsible charge:

Jeffrey Grau


Name of Structural Engineer (When structural design has been delegated):

Signature of Architect or Structural Engineer:

Date:

03/28/22

Note: To facilitate DSA electronic mark-ups and identification stamp application, DSA recommends against using secured electronic or digital signatures.



DSA 103-19: LIST OF REQUIRED VERIFIED REPORTS, CBC 2019

Application Number: School Name: School District:

02-119977 Leataata Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:38:55

- 1. Structural Testing and Inspection: Laboratory Verified Report Form DSA 291
- 2. Post-installed Anchors: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 3. Shop Welding Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 4. High-Strength Bolt Installation Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292

Application Number: School Name: School District:

02-119974 John Sloat Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:25:50

2019 CBC

IMPORTANT: This form is only a summary list of structural tests and some of the special inspections required for the project. Generally, the structural tests and special inspections noted on this form are those that will be performed by the Geotechnical Engineer of Record, Laboratory of Record, or Special Inspector. The actual complete test and inspection program must be performed as detailed on the DSA approved documents. The appendix at the bottom of this form identifies work NOT subject to DSA requirements for special inspection or structural testing. The project inspector is responsible for providing inspection of all facets of construction, including but not limited to, special inspections not listed on this form such as structural wood framing, high-load wood diaphragms, cold-formed steel framing, anchorage of non-structural components, etc., per Title 24, Part 2, Chapter 17A (2019 CBC).

**NOTE: Undefined section and table references found in this document are from the CBC, or California Building Code.

KEY TO COLUMNS

1. TYPE	2. PERFORMED BY
Continuous – Indicates that a continuous special inspection is required	GE – Indicates that the special inspection shall be performed by a registered geotechnical engineer or his or her authorized representative.
Periodic – Indicates that a periodic special inspection is required	LOR – Indicates that the test or special inspection shall be performed by a testing laboratory accepted in the DSA Laboratory Evaluation and Acceptance (LEA) Program. See CAC Section 4-335.
	PI – Indicates that the special inspection may be performed by a project inspector when specifically approved by DSA.
Test – Indicates that a test is required	SI – Indicates that the special inspection shall be performed by an appropriately qualified/approved special inspector.

Application Number:

School Name:

02-119974

34-53

John Sloat Elementary School

DSA File Number:

Increment Number:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 11:25:50

Geotechnical Reports: Project does NOT have and does NOT require a geotechnical report

	1. GENERAL:	Table 1705A.	Table 1705A.6		
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
V	 a. Verify that: Site has been prepared properly prior to placement of controlled fill and/or excavations for foundations. Foundation excavations are extended to proper depth and have reached proper material. Materials below footings are adequate to achieve the design bearing capacity. 	See Notes	PI	Refer to specific items identified in the Appendix listing exemptions for limitations. Placement of controlled fill exceeding 12" depth under foundations is not permitted without a geotechnical report.	

	2. SOIL COMPACTION AND FILL:	Table 1705A.6	Table 1705A.6		
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
V	a. Verify use of proper materials, densities and inspect lift thicknesses, placement and compaction during placement of fill.	Continuous	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.	
V	b. Compaction testing.	Test	LOR*	* Under the supervision of a geotechnical engineer or LOR's engineering manager. Refer to specific items identified in the Appendix listing exemptions for limitations.	

	3. DRIVEN DEEP FOUNDATIONS (PILES):	Table 1705A.7
--	-------------------------------------	---------------

Application Number: 02-119974

School Name:

John Sloat Elementary School

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:25:50

DSA File Number: 34-53

Increment Number:

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Verify pile materials, sizes and lengths comply with the requirements.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
b. Determine capacities of test piles and conduct additional load tests as required.	Test	LOR*	* Under the supervision of the geotechnical engineer.
c. Inspect driving operations and maintain complete and accurate records for each pile.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
d. Verify locations of piles and their plumbness, confirm type and size of hammer, record number of blows per foot of penetration, determine required penetrations to achieve design capacity, record tip and butt elevations and record any pile damage.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
e. Steel piles.	Provide tests a	nd inspection	s per STEEL section below.
f. Concrete piles and concrete filled piles.	Provide tests a	nd inspection	s per CONCRETE section below.
g. For specialty piles, perform additional inspections as determined by the registered design professional in responsible charge.	*	*	* As defined on drawings or specifications.
	T		
4. CAST-IN-PLACE DEEP FOUNDATIONS (PIERS):	Table 1705A.8		
Test or Special Inspection	Туре	Performed	Code References and Notes

DGS DSA 103-19 (Revised 07/16/2020)

Ву

Application Number: School Name: School District:
02-119974 John Sloat Elementary School District
DSA File Number: Increment Number: Date Created:

DSA File Number: Increment Number: Date Created: 2022-03-28 11:25:50

V	a. Inspect drilling operations and maintain complete and accurate records for each pier.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
V	b. Verify pier locations, diameters, plumbness and lengths.Record concrete or grout volumes.	Continuous	PI	Continuous inspection to be provided by project inspector. Refer to specific items identified in the Appendix listing exemptions for limitations.
V	c. Concrete piers.	Provide tests and inspections per CONCRETE section below.		

5. RETAINING WALLS:				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
a. Placement, compaction and inspection of backfill.	Continuous	GE*	1705A.6.1. * By geotechnical engineer or his or her qualified representative. (See Section 2 above).	
b. Placement of soil reinforcement and/or drainage devices.	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.	
c. Segmental retaining walls; inspect placement of units, dowels, connectors, etc.	Continuous	Continuous * By geotechnical engineer or his or her qualified representative. See DSA IR 16-3.		
d. Concrete retaining walls.	Provide tests and inspections per CONCRETE section below.			
e. Masonry retaining walls.	Provide tests a	nd inspection	s per MASONRY section below.	

6. OTHER SOILS:			
Test or Special Inspection	Type	Performed By	Code References and Notes

Application Number:	School Name:	School District:
02-119974	John Sloat Elementary School	Sacramento City Unified School District
DSA File Number:	Increment Number:	Date Created:
34-53		2022-03-28 11:25:50

a. Soil Improvements	Test		Submit a comprehensive report documenting final soil improvements constructed, construction observation and the results of the confirmation testing and analysis to CGS for final acceptance. * By geotechnical engineer or his or her qualified representative.
b. Inspection of Soil Improvements	Continuous	GE*	* By geotechnical engineer or his or her qualified representative.
c.			

8. PRESTRESSED / POST-TENSIONED CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13

Application Number: School Name:

02-119974

DSA File Number: 34-53

John Sloat Elementary School

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:25:50

	7. CAST-IN-PLACE CONCRETE			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
Mate	rial Verification and Testing:			
V	a. Verify use of required design mix.	Periodic	SI	Table 1705A.3 Item 5, 1910A.1.
V	b. Identifiy, sample, and test reinforcing steel.	Test	LOR	1910A.2 ; ACI 318-14 Section 26.6.1.2; DSA IR 17-10. (See Appendix for exemptions.)
V	c. During concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	Test	LOR	Table 1705A.3 Item 6 ; ACI 318-14 Sections 26.5 & 26.12.
7	d. Test concrete (f'c).	Test	LOR	1905A.1.15 ; ACI 318-14 Section 26.12.
Inspe	ction:			
7	e. Batch plant inspection:	See Notes	SI	Default of 'Continuous' per 1705A.3.3. If approved by DSA, batch plant inspection may be reduced to 'Periodic' subject to requirements in Section 1705A.3.3.1, or eliminated per 1705A.3.3.2. (See Appendix for exemptions.)
	f. Welding of reinforcing steel.	Provide spec	ial inspection	per STEEL, Category 19.1(d) & (e) and/or 19.2(g) & (h) below.

JCC DCV	102 10 (Davisad	17/16/	2020)

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119974John Sloat Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:25:50

Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Sample and test prestressing tendons and anchorages.	Test	LOR	1705A.3.4, 1910A.3
b. Inspect placement of prestressing tendons.	Periodic	SI	1705A.3.4, Table 1705A.3 Items 1 & 9.
c. Verify in-situ concrete strength prior to stressing of post-tensioning tendons.	Periodic	SI	Table 1705A.3 Item 11. Special inspector to verify specified concrete strength test prior to stressing.
d. Inspect application of post-tensioning or prestressing forces and grouting of bonded prestressing tendons.	Continuous	SI	1705A.3.4, Table 1705A.3 Item 9 ; ACI 318-14 Section 26.13

9. PRECAST CONCRETE (in addition to Cast-in-Place Concrete tests and inspections):			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Inspect fabrication of precast concrete members.	Continuous	SI	ACI 318-14 Section 26.13.
b. Inspect erection of precast concrete members.	Periodic	SI*	Table 1705A.3 Item 10. * May be performed by PI when specifically approved by DSA.

10. SHOTCRETE (in addition to Cast-in-Place Concrete tests and inspections):				
Test or Special Inspection	Туре	Performed By	Code References and Notes	

Table 1705A.3; ACI 318-14 Sections 26.12 & 26.13Application Number:School Name:School District:02-119974John Sloat Elementary SchoolSacramento City Unified School DistrictDSA File Number:Increment Number:Date Created:34-532022-03-28 11:25:50

a. Inspect shotcrete placement for proper application techniques.	Continuous	SI	1705A.19, Table 1705A.3 Item 7, 1908A.6, 1908A.7, 1908A.8, 1908A.9, 1908A.11, 1908A.12. See ACI 506.2-13 Section 3.4, ACI 506R-16.
b. Sample and test shotcrete (f'c).	Test	LOR	1908A.5, 1908A.10.

	11. POST-INSTALLED ANCHORS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
V	a. Inspect installation of post-installed anchors	See Notes	SI*	1617A.1.19, Table 1705A.3 Item 4a (Continuous) & 4b (Periodic), 1705A.3.8 (See Appendix for exemptions). ACI 318-14 Sections 17.8 & 26.13. * May be performed by the project inspector when specifically approved by DSA.
V	b. Test post-installed anchors.	Test	LOR	1910A.5. (See Appendix for exemptions.)

12. OTHER CONCRETE:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a.			

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

John Sloat Elementary School

DSA File Number:

02-119974

34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created:

2022-03-28 11:25:50

	17. STRUCTURAL STEEL, COLD-FORMED STEEL AND ALU	MINUM USED	FOR STRUCT	JRAL PURPOSES			
Mate	Material Verification and Testing:						
	Test or Special Inspection	Туре	Performed By	Code References and Notes			
V	 a. Verify identification of all materials and: Mill certificates indicate material properties that comply with requirements. Material sizes, types and grades comply with requirements. 	Periodic	*	Table 1705A.2.1 Item 3a 3c. 2202A.1; AISI S100-16 Section A3.1 & A3.2, AISI S240-15 Section A3 & A5, AISI S220-15 Sections A4 & A6. * By special inspector or qualified technician when performed off-site.			
✓	b. Test unidentified materials	Test	LOR	2202A.1.			
√	c. Examine seam welds of HSS shapes	Periodic	SI	DSA IR 17-3.			
Inspe	ection:						
7	d. Verify and document steel fabrication per DSA-approved construction documents.	Periodic	SI	Not applicable to cold-formed steel light-frame construction, except for trusses (1705A.2.4).			

		18. HIGH-STRENGTH BOLTS: RCSC 2014			
M	ater	ial Verification and Testing of High-Strength Bolts, Nuts	and Washers:		
		Test or Special Inspection	Туре		Code References and Notes
				Ву	
		a. Verify identification markings and manufacturer's certificates of compliance conform to ASTM standards specified in the DSA-approved documents.	Periodic	SI	Table 1705A.2.1 Items 1a & 1b, 2202A.1 ; AISC 360-16 Section A3.3, J3.1, and N3.2; RCSC 2014 Section 1.5 & 2.1; DSA IR 17-8 & DSA IR 17-9.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

DSA File Number:

02-119974

34-53

School Name:

John Sloat Elementary School

School District:

Sacramento City Unified School District

Date Created:

Increment Number:

2022-03-28 11:25:50

V	b. Test high-strength bolts, nuts and washers.	Test	LOR	Table 1705A.2.1 Item 1c, 2213A.1 ; RCSC 2014 Section 7.2; DSA IR 17-8.
Inspe	ection of High-Strength Bolt Installation:		-	
	c. Bearing-type ("snug tight") connections.	Periodic	SI	Table 1705A.2.1 Item 2a, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Section 9.1; DSA IR 17-9.
7	d. Pretensioned and slip-critical connections.	*	SI	Table 1705A.2.1 Items 2b & 2c, 1705A.2.6, 2204A.2 ; AISC 360-16 J3.1, J3.2, M2.5 & N5.6; RCSC 2014 Sections 9.2 & 9.3; DSA IR 17-9. * "Continuous" or "Periodic" depends on the tightening method used.
	19. WELDING:	1	num; AWS D1	1 Items 4 & 5; AWS D1.1 and AWS D1.8 for structural steel; AWS 3 for cold-formed steel; AWS D1.4 for reinforcing steel; DSA IR 17-ons.)
Verif	ication of Materials, Equipment, Welders, etc.:	•		
	Test or Special Inspection	Туре	Performed By	Code References and Notes
7	a. Verify weld filler material identification markings per AWS designation listed on the DSA-approved documents and the WPS.	Periodic	SI	DSA IR 17-3.
✓	b. Verify weld filler material manufacturer's certificate of compliance.	Periodic	SI	DSA IR 17-3.
✓	c. Verify WPS, welder qualifications and equipment.	Periodic	SI	DSA IR 17-3.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

School District:

02-119974

John Sloat Elementary School

Sacramento City Unified School District

DSA File Number: 34-53

Increment Number:

Date Created: 2022-03-28 11:25:50

	19.1 SHOP WELDING:				
	Test or Special Inspection	Туре	Performed By	Code References and Notes	
✓	a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.	
✓	b. Inspect single-pass fillet welds ≤ 5/16", floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Items 5a.5 & 5a.6 ; AISC 360-16 (and AISC 341-16 as applicable); DSA IR 17-3.	
	c. Inspect welding of stairs and railing systems.	Periodic	SI	1705A.2.1 ; AISC 360-16 (and AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3.	
	d. Verification of reinforcing steel weldability other than ASTM A706.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.	
	e. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.	

19.2 FIELD WELDING:			
Test or Special Inspection	Туре	Performed By	Code References and Notes
a. Inspect groove welds, multi-pass fillet welds, single pass fillet welds > 5/16", plug and slot welds.	Continuous	SI	Table 1705A.2.1 Items 5a.1 4 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.
b. Inspect single-pass fillet welds ≤ 5/16".	Periodic	SI	Table 1705A.2.1 Item 5a.5 ; AISC 360-16 (AISC 341-16 as applicable); DSA IR 17-3.

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16

Application Number:

School Name:

02-119974

John Sloat Elementary School

DSA File Number: 34-53

Increment Number:

School District:

Sacramento City Unified School District

Date Created: 2022-03-28 11:25:50

c. Inspect end-welded studs (ASTM A-108) installation (including bend test).	Periodic	SI	2213A.2 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1; DSA IR 17-3.
d. Inspect floor and roof deck welds.	Periodic	SI	1705A.2.2, Table 1705A.2.1 Item 5a.6 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.3; DSA IR 17-3.
e. Inspect welding of structural cold-formed steel.	Periodic	SI*	1705A.2.5; AWS D1.3; DSA IR 17-3. The quality control provisions of AISI S240-15 Chapter D shall also apply. * May be performed by the project inspector when specifically approved by DSA.
f. Inspect welding of stairs and railing systems.	Periodic	SI*	1705A.2.1 ; AISC 360-16 (AISC 341-16 as applicable); AWS D1.1 & D1.3; DSA IR 17-3. * May be performed by the project inspector when specifically approved by DSA.
g. Verification of reinforcing steel weldability.	Periodic	SI	1705A.3.1 ; AWS D1.4; DSA IR 17-3. Verify carbon equivalent reported on mill certificates.
h. Inspect welding of reinforcing steel.	Continuous	SI	Table 1705A.2.1 Item 5b, 1705A.3.1, Table 1705A.3 Item 2, 1903A.8 ; AWS D1.4; DSA IR 17-3.

	20. NONDESTRUCTIVE TESTING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, A	AISC 358-16, AI	SC 360-16; AI	SI S100-16
	Test or Special Inspection	Туре	Performed By	Code References and Notes
	a. Ultrasonic	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.

1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119974John Sloat Elementary SchoolSacramento City Unified School DistrictDSA File Number:Increment Number:Date Created:34-532022-03-28 11:25:50

b. Magnetic Particle	Test	LOR	1705A.2.1, 1705A.2.5 ; AISC 341-16 J6.2, AISC 360-16 N5.5; ANSI/ ASNT CP-189, SNT-TC-1A; AWS D1.1, AWS D1.8; DSA IR 17-2.
c.	Test	LOR	

21. STEEL JOISTS AND TRUSSES: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16				
Test or Special Inspection	Туре	Performed By	Code References and Notes	
		,		
a. Verify size, type and grade for all chord and web members as well as connectors and weld filler material; verify joist profile, dimensions and camber (if applicable); verify all weld locations, lengths and profiles; mark or tag each joist.	Continuous	SI	1705A.2.3; Table 1705A.2.3; AWS D1.1; DSA IR 22-3 for steel joists only. 1705A.2.4; AWS D1.3 for cold-formed steel trusses.	

22. SPRAY APPLIED FIRE-PROOFING: 1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16				
Test or Special Inspection	Type	Performed By	Code References and Notes	
a. Examine structural steel surface conditions, inspect application, take samples, measure thickness and verify compliance of all aspects of application with DSA-approved documents.	Periodic	SI	1705A.14.	
b. Test bond strength.	Test	LOR	1705A.14.6.	

1705A.2.1, Table 1705A.2.1; AISC 303-16, AISC 341-16, AISC 358-16, AISC 360-16; AISI S100-16Application Number:School Name:School District:02-119974John Sloat Elementary SchoolSacramento City Unified School DistrictDSA File Number:Date Created:34-532022-03-28 11:25:50

	c. Test density.	Test	LOR	1705A.14.5.
	23. ANCHOR BOLTS AND ANCHOR RODS:			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
7	a. Anchor Bolts and Anchor Rods	Test	LOR	Sample and test anchor bolts and anchor rods not readily identifiable per procedures noted in DSA IR 17-11.
	b. Threaded rod not used for foundation anchorage.	Test	LOR	Sample and test threaded rods not readily identifiable per procedures noted in DSA IR 17-11.
	,			
	Other Steel			
	Test or Special Inspection	Туре	Performed By	Code References and Notes
	a.			

Application Number: School Name: School District: Sacramento City Unified School District DSA File Number: Increment Number: Date Created: 2022-03-28 11:25:50

Exempt items given in DSA IR A-22 or the 2019 CBC (including DSA amendments) and those items identified below with a check mark by the design professional are NOT subject to DSA requirements for the structural tests / special inspections noted. Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall Items marked as exempt shall <

SOILS:
1. Deep foundations acting as a cantilever footing designed based on minimum allowable pressures per CBC Table 1806A.2 and having no geotechnical report for the following cases: A) free standing sign or scoreboard, B) cell or antenna towers and poles less than 35'-0" tall (e.g., lighting poles, flag poles, poles supporting open mesh fences, etc.), C) single-story structure with dead load less than 5 psf (e.g., open fabric shade structure), or D) covered walkway structure with an apex height less than 10'-0" above adjacent grade.
2. Shallow foundations, etc. are exempt from special inspections and testing by a Geotechnical Engineer for the following cases: A) buildings without a geotechnical report and meeting the exception item #1 criteria in CBC Section 1803A.2 supported by native soil (any excavation depth) or fill soil (not exceeding 12" depth per CBC Section 1804A.6), B) soil scarification/recompaction not exceeding 12" depth, C) native or fill soil supporting exterior non-structural flatwork (e.g., sidewalks, site concrete ramps, site stairs, parking lots, driveways, etc.), D) unpaved landscaping and playground areas, or E) utility trench backfill.
CONCRETE/MASONRY:
1. Post-installed anchors for the following: A) exempt non-structural components (e.g., mechanical, electrical, plumbing equipment - see item 7 for "Welding") given in CBC Section 1617A.1.18 (which replaces ASCE 7-16, Section 13.1.4) or B) interior nonstructural wall partitions meeting criteria listed in exempt item 3 for "Welding."
2. Concrete batch plant inspection is not required for items given in CRC Section 1705A 3.3.2 subject to the requirements and limitations

DGS DSA 103-19 (Revised 07/16/2020)

in that section.


Application Number: 02-119974 DSA File Number: 34-53 School Name: John Sloat Elementary School Increment Number: 02-210974 Dota Created: 2022-03-28 11:25:50

3. Non-bearing non-shear masonry walls may be exempt from certain DSA masonry testing and special inspection items as allowed per DSA IR 21-1.16. Refer to construction documents for specific exemptions accordingly for each applicable wall condition.
4. Epoxy shear dowels in site flatwork and/or other non-structural concrete.
5. Testing of reinforcing bars is not required for items given in CBC Section 1910A.2 subject to the requirements and limitations in that section.
Welding:

wording.
1. Solid-clad and open-mesh gates with maximum leaf span or rolling section for rolling gates of 10' and apex height less than 8'-0" above lowest adjacent grade. When located above circulation or occupied space below, these gates are not located within 1.5x gate/fence height (max 8'-0") to the edge of floor or roof.
2. Handrails, guardrails, and modular or relocatable ramps associated with walking surfaces less than 30" above adjacent grade (excluding post base connections per the 'Exception' language in Section 1705A.2.1); fillet welds shall not be ground flush.
3. Non-structural interior cold-formed steel framing spanning less than 15'-0", such as in interior partitions, interior soffits, etc. supporting only self weight and light-weight finishes or adhered tile, masonry, stone, or terra cotta veneer no more than 5/8" thickness and apex less than 20'-0" in height and not over an exit way. Maximum tributary load to a member shall not exceed the equivalent of that occurring from a 10'x10' opening in a 15' tall wall for a header or king stud.
4. Manufactured support frames and curbs using hot rolled or cold-formed steel (i.e., light gauge) for mechanical, electrical, or plumbing equipment weighing less than 2000# (equipment only) (connections of such frames to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).
5. Manufactured components (e.g., Tolco, B-Line, Afcon, etc.) for mechanical, electrical, or plumbing hanger support and bracing (connections of such components to superstructure elements using welding will require special inspection as noted in selected item(s) for Sections 19, 19.1 and/or 19.2 of listing above).

Application Number: 02-119974 DSA File Number: Uncrement Number: DSA File Number: O2-119974 DSA File Number: Date Created:

2022-03-28 11:25:50

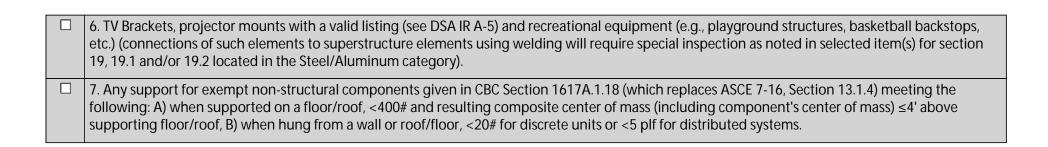

34-53

DSA 103-19: LISTING OF STRUCTURAL TESTS & SPECIAL INSPECTIONS(SIGNATURE), 2019 CBC

Application Number: School Name: School District:

02-119974 John Sloat Elementary School Sacramento City Unified School District

DSA File Number: Increment Number: Date Created: 2022-03-28 11:25:50

Name of Architect or Engineer in general responsible charge:

Jeffrey Grau


Name of Structural Engineer (When structural design has been delegated):

Signature of Architect or Structural Engineer:

Date:

03/28/22

Note: To facilitate DSA electronic mark-ups and identification stamp application, DSA recommends against using secured electronic or digital signatures.



DSA 103-19: LIST OF REQUIRED VERIFIED REPORTS, CBC 2019

Application Number: School Name:

School District: Sacramento City Unified School District 02-119974 John Sloat Elementary School

DSA File Number: Increment Number: Date Created: 2022-03-28 11:25:50 34-53

- 1. Structural Testing and Inspection: Laboratory Verified Report Form DSA 291
- 2. Post-installed Anchors: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- 3. Shop Welding Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified Report Form DSA 292
- High-Strength Bolt Installation Inspection: Laboratory Verified Report Form DSA 291, or, for independently contracting SI, Special Inspection Verified 4. Report Form DSA 292

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Requirements for preparing Storm Water Pollution Prevention Plan.

1.2 SCOPE OF WORK

- A. General: Provide all materials, equipment and labor necessary to furnish and install straw wattles or erosion/sediment control measures as required.
- B. BMP Requirements at Construction Site: The Contractor shall as a minimum address:
 - 1. Cut and fill operations.
 - 2. Temporary stockpiles.
 - 3. Vehicle and equipment storage, maintenance and fueling operations.
 - 4. Concrete, plaster, mortar and paint disposal.
 - Dust control.
 - 6. Tracking of dirt, mud on off-site streets.
 - 7. Pipe flushing.

1.3 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
- B. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures

1.4 QUALITY ASSURANCE

A. General: Comply with governing codes and regulations.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Straw Wattles: New manufactured straw roles in compliance with state requirements for sediment control.
- B. Filter Bag: As required by local jurisdiction.

EROSION CONTROL SECTION 01 5713 21-1504

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Straw Wattles: Install as needed.
- B. Filter Bags: Installed as needed.

3.2 MAINTENANCE AND REMOVAL:

- A. General: Maintain and repair existing and new erosion control facilities throughout the construction period. Remove silt build up at straw wattles and/or silt fences as needed. Repair damage to earth slopes and banks. Erosion control measures shall be left in place until final paving and landscaping are complete.
- B. Monitoring: Provide monitoring of erosion control measures before and after storm events.
- C. Cleaning: Keep area clean of debris.
- D. Remove erosion control measures prior to placing finish landscaping.

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes: VOC restrictions for product categories listed below under Article "DEFINITIONS" and in compliance with the following.
 - 1. California Code of Regulations, Title 24, Part 11, California Green Building Standards Code.

1.2 RELATED REQUIREMENTS

A. Divisions 01 through 33 contain related requirements specific to the work of each of these Sections. Requirements may or may not include reference to this Section.

1.3 REFERENCES

- A. California Green Building Standards Code (CALGreen), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. Low-Emitting Materials Product List; California Collaborative for High Performance Schools (CHPS); current edition at www.chps.net/.
- C. CRI (GLCC) Green Label Testing Program Approved Product Categories for Carpet Cushion; Carpet and Rug Institute; current edition.
- D. CRI (GLP) Green Label Plus Carpet Testing Program Approved Products; Carpet and Rug Institute; current edition.
- E. GEI (SCH) GREENGUARD "Children and Schools" Certified Products; GREENGUARD Environmental Institute; current listings at www.greenguard.org.
- F. GreenSeal GS-36 Commercial Adhesives; Green Seal, Inc.
- G. SCAQMD 1168 South Coast Air Quality Management District Rule No.1168; current edition; www.aqmd.gov.
- H. SCS (CPD) SCS Certified Products; Scientific Certification Systems; current listings at www.scscertified.com.

1.4 DEFINITIONS

- A. VOC-Restricted Products: Products of each of the following categories when installed or applied on site:
 - 1. Adhesives, including aerosols, sealants, and sealer coatings.
 - 2. Carpet.
 - 3. Carpet cushion.
 - 4. Carpet tile.

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

- 5. Resilient floor coverings, cove base, accessories.
- 6. Wood flooring.
- 7. Paints and coatings.
- 8. Insulation.
- 9. Gypsum board.
- 10. Acoustical ceilings and panels.
- 11. Cabinet work.
- 12. Wall coverings.
- 13. Composite wood and agrifiber products and binder resins used either alone or as part of another product.
- 14. Other products when specifically stated in the specifications.
- 15. Student and teacher desks, tables, and chairs.
- 16. Systems furniture and seating.
- B. Adhesives: Gunnable, trowelable, liquid-applied, and aerosol adhesives, whether specified or not; including flooring adhesives, resilient base adhesives, and pipe jointing adhesives.
- C. Sealants: Gunnable, trowelable, and liquid-applied joint sealants and sealant primers, whether specified or not; including firestopping sealants and duct joint sealers.
- D. Interior of Building: Anywhere inside the exterior weather barrier.

1.5 SUBMITTAL REQUIREMENTS

- A. Product Data: For each VOC-restricted product used in the Project, submit product data showing compliance, except when another type of evidence of compliance is required.
- B. Verification of Compliance: Submit for each different product in each applicable category.
 - 1. Identify submittals with the words "CALGreen LEED VOC Compliance Report".
- C. Installer Certifications for Accessory Materials: Require each installer of any type of product, (not just the products for which VOC restrictions are specified) to certify that either 1) no adhesives, joint sealants, paints, coatings, or composite wood or agrifiber products have been used in the installation of their products, or 2) that such products used comply with these requirements.
 - 1. Use the form following this Section for installer certifications.

1.6 QUALITY ASSURANCE

A. Manufacturer's Testing Agency Qualifications: Independent firm specializing in performing testing and inspections of the type specified in this Section.

PART 2 - PRODUCTS

2.1 MATERIALS

A. General.

- 1. Provide products conforming to local, State and Federal government requirements limiting the amount of volatile organic compounds contained in the product, for its intended application. If specified product exceeds current requirement, provide conforming product at no additional cost.
- 2. Provide only products having volatile organic compound (VOC) content not greater than required by South Coast Air Quality Management District Rule No.1168 and less where required by code.
 - a. These products may be specified in multiple Sections throughout these specifications.
- B. Adhesives, Including Carpet and Cushion Adhesives: Comply with CALGreen Section 5.504 and Table 5.504.4.1.
 - 1. Verification of Compliance: Acceptable types are:
 - a. Report of laboratory testing performed in accordance with requirements.
 - b. Published product data showing compliance with requirements.
 - c. Certification by manufacturer that product complies with requirements.
 - 2. Aerosol Adhesives: Comply with Table 5.504.4.1 of CalGreen Section 5.504, and California Code of Regulations Title 17, Section 94507.
 - a. Verification of Compliance: Acceptable types are:
 - 1) Current GreenSeal Certification.
 - 2) Report of laboratory testing performed in accordance with GreenSeal GS-36 requirements.
 - 3) Published product data showing compliance with requirements.
 - 3. Products used shall comply with the following limits.

Table 5.504.4.1 ADHESIVE VOC LIMIT		
Architectural Applications	Current VOC Limit	
Indoor Carpet Adhesives	50	
Carpet Pad Adhesives	50	
Outdoor Carpet Adhesives	150	
Wood Flooring Adhesives	100	
Rubber Floor Adhesives	60	
Subfloor Adhesives	50	
Ceramic Tile Adhesives	65	
VCT and Asphalt Tile Adhesives	50	
Dry Wall and Panel Adhesives	50	
Cove Base Adhesives	50	
Multipurpose Construction Adhesives	70	

Table 5.504.4.1 ADHESIVE VOC LIMIT			
Structural Glazing Adhesives	100		
Single Ply Roof Membrane Adhesives	250		
Other adhesives not specifically listed	250		
VOC Limits and Effective	VOC Limits and Effective Dates**		
Specialty Applications	Current VOC Limit		
PVC Welding	510		
CPVC Welding	490		
ABS Welding	325		
Plastic Cement Welding	250		
Adhesive Primer for Plastic	550		
Contact Adhesive	80		
Special Purpose Contact Adhesive	250		
Structural Wood Member Adhesive	140		
Top and Trim Adhesive	250		
** The specified limits remain in effect unless revised limits are listed in the			
current governing edition of CalGreen.			
For adhesives, adhesive bonding primers, or any other primer not regulated by the above two Tables and applied to the following substrates, the following limits shall apply:			
Substrate Specific Applications	Current VOC Limit		
Metal to Metal	30		
Plastic Foams	50		
Porous Material (except wood)	50		
Wood	30		
Fiberglass 80	80		
Note: If an adhesive is used to bond dissimilar s adhesive with the highest VOC content sh	_		

- C. Joint Sealants: Comply with CALGreen Section 5.504 and Table 5.504.4.2.
 - 1. Verification of Compliance: Acceptable types are:
 - a. Report of laboratory testing performed in accordance with requirements.
 - b. Published product data showing compliance with requirements.
 - c. Certification by manufacturer that product complies with requirements.
 - 2. Products used shall comply with the following limits.

Table 5.504.4.2 SEALANT V	OC LIMIT
Less Water and Less Exempt Compounds in Grams per Liter	
Sealant	Current VOC Limit
Architectural	250
Marine Deck	760
Non-Membrane Roof	300
Roadway	250

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

Table 5.504.4.2 SEALANT VOC LIMIT	
Less Water and Less Exempt Compounds in Grams per Liter	
Single-Ply Roof Membrane	450
Other	420
Sealant Primers	Current VOC Limit
Architectural	
Non-Porous	250
Porous	775
Modified Bituminous	500
Marine Deck	760
Other	750
I .	

For low-solid adhesives or sealants the VOC limit is expressed in grams per liter of material; for all other adhesives and sealants, VOC limits are expressed as grams of VOC per liter of adhesive or sealant less water and less exempt compounds.

- D. Resilient Flooring Products: Floor areas receiving resilient flooring shall have flooring complying with VOC emission limits in CHPS 2009 criteria and listed on the Low Emitting Materials List or Product Registry or certified under the Resilient Floor Covering Institute (RFCI) FloorScore program.
 - 1. Verification of Compliance: Documentation shall be provided verifying that resilient flooring materials meet the pollutant emission limits. Acceptable types are:
 - a. Published product data showing compliance with requirements.
 - b. Inclusion on one of the following lists:
 - www.chps.net/dev/drupal/node/381
 - 2) www.rfci.com/int FS-ProdCert.htm
 - 3) www.greenguard.org/default.aspx?tabid=135
 - c. Other method acceptable to enforcing agency.
- E. Paints and Coatings: Comply with CALGreen Section 5.504 and Table 5.504.4.3 based on the California Air Resources Board, Architectural Coatings Suggested Control Measure. Products used in this category shall comply with these limits, unless more stringent local and regional rules apply.
 - 1. Determination of VOC Content: Testing and calculation in accordance with 40 CFR 59, Subpart D (EPA Method 24), exclusive of colorants added to a tint base and water added at Project site; or other method acceptable to authorities having jurisdiction.
 - a. Verification of Compliance: Acceptable types are:
 - 1) Report of laboratory testing performed in accordance with requirements.
 - 2) Published product data showing compliance with requirements.
 - 3) Certification by manufacturer that product complies with requirements.
 - 2. Provide coatings that comply with the most stringent requirements specified in the following:

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

- a. 40 CFR 59, Subpart D National Volatile Organic Compound Emission Standards for Architectural Coatings.
- b. South Coast Air Quality Management District Rule No.1168.
- 3. Products used shall comply with the following limits.

Table 5.504.4.3 VOC CONTENT LIMITS FOR ARCHITECTURAL COATINGS (See Notes 2 & 3 below)		
Grams of VOC per Liter of Coating, less water and less exempt compounds		
Coating Category	Current VOC Limit 1/1/2012	
Flat Coatings	50	
Non-Flat Coatings	100	
Non-Flat High Gloss Coatings	150	
Specialty Coatin	gs	
Aluminum Roof Coatings	400	
Basement Specialty Coatings	400	
Bituminous Roof Coatings	50	
Bituminous Roof Primers	350	
Bond Breakers	350	
Concrete Curing Compounds	350	
Concrete / Masonry Sealers	100	
Driveway Sealers	50	
Dry Fog Coatings	150	
Faux Finishing Coatings	350	
Fire Resistive Coatings	350	
Floor Coatings	100	
Form-Release Compounds	250	
Graphic Arts Coatings (Sign Paints)	500	
High-Temperature Coatings	420	
Industrial Maintenance Coatings	250	
Low Solids Coatings (See Note 1 below)	120	
Magnesite Cement Coatings	450	
Mastic Texture Coatings	100	
Metallic Pigmented Coatings	500	
Multicolor Coatings	250	
Pretreatment Wash Primers	420	
Primers, Sealers and Undercoaters	100	
Reactive Penetrating Sealers	350	
Recycled Coatings	250	
Roof Coatings	50	
Rust Preventative Coatings	250	
Shellacs:		
Clear	730	
Opaque	550	
Specialty Primers, Sealers and Undercoaters	100	
Stains	250	

Table 5.504.4.3 VOC CONTENT LIMITS FOR ARCHITECTURAL COATINGS

(See Notes 2 & 3 below)

Grams of VOC per Liter of Coating, less water and less exempt compounds

Coating Category	Current VOC Limit 1/1/2012
Stone Consolidants	450
Swimming Pool Coatings	340
Traffic Marking Coatings	100
Waterproofing Membranes	250
Wood Coatings	275
Wood Preservatives	350
Zinc Rich Primers	340

Note 1: Grams of VOC per liter of coating including water and including exempt compounds

Note 2: Not Applicable

Note 3: Values in this table are derived from those specified by the California Air Resources Board, Architectural Coatings Suggested Control Measure, February 1, 2008. More information is available from the Air Resources Board.

F. Restricted Components:

- 1. Paints and coatings shall not contain any of the following:
 - a. Acrolein.
 - b. Acrylonitrile.
 - c. Antimony.
 - d. Benzene.
 - e. Butyl benzyl phthalate.
 - f. Cadmium.
 - g. Di (2-ethylhexyl) phthalate.
 - h. Di-n-butyl phthalate.
 - i. Di-n-octyl phthalate.
 - j. 1,2-dichlorobenzene.
 - k. Diethyl phthalate.
 - I. Dimethyl phthalate.
 - m. Ethylbenzene.
 - n. Formaldehyde.
 - o. Hexavalent chromium.
 - p. Isophorone.
 - q. Lead.
 - r. Mercury.
 - s. Methyl ethyl ketone.

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

- t. Methyl isobutyl ketone.
- u. Methylene chloride.
- v. Naphthalene.
- w. Toluene (methylbenzene).
- x. 1.1.1-trichloroethane.
- y. Vinyl chloride.
- G. Other Product Categories: Comply with limitations specified in related sections.

PART 3 - EXECUTION

3.1 FIELD QUALITY CONTROL

- A. Owner reserves the right to reject non-compliant products, whether installed or not, and require their removal and replacement with compliant products at no extra cost to Owner.
- B. Additional costs to restore indoor air quality, including fines by authorities, due to installation of non-compliant products will be borne by Contractor.

3.2 CERTIFICATION FORM

- A. Use of this Form:
 - 1. Because installers are allowed and directed to choose accessory materials suitable for the applicable installation, there is a possibility that such accessory materials might contain VOC content in excess of that permitted, especially where such materials have not been explicitly specified.
 - 2. Contractor is required to obtain and submit this Form from each installer of work on this project.
 - 3. For each product category listed, circle the correct words in brackets: either [HAS] or [HAS NOT].
 - 4. If these accessory materials have been used, attach to this form product data and MSDS sheet for each such product.

(The Remainder of this Page is Intentionally Left Blank)

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

ACC	CESSORY MATERIAL VOC CONTENT CERTIFICATION FORM
IDENTIFICATION	:
Pro	oject Name:
Pro	oject No.:
Arc	chitect:
PRODUCT CERT	IFICATION: I certify that the installation work of my firm on this project:
1.	[HAS] [HAS NOT] required the use of any ADHESIVES.
2.	[HAS] [HAS NOT] required the use of any JOINT SEALANTS.
3.	[HAS] [HAS NOT] required the use of any PAINTS OR COATINGS.
4.	[HAS] [HAS NOT] required the use of any COMPOSITE WOOD or AGRIFIBER PRODUCTS.
Product data and	MSDS sheets are attached.
CERTIFIED BY (I	nstaller/Manufacturer/Supplier Firm):
Firm Name:	
Print Name:	
Signature:	
Title:	(officer of company)
Data:	

VOLATILE ORGANIC COMPOUND (VOC) RESTRICTIONS SECTION 01 6116 21-1504

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\01 6116.20-volatile organic compound (voc) restrictions.docx Last Updated: January 18, 2022

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - Railings and handrails.

1.2 RELATED REQUIREMENTS

- A. Section 01 6116, Volatile Organic Compound (VOC) Restrictions; for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- B. Section 32 1600, Site Concrete.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. American Welding Society (AWS):
 - 1. A2.4: Standard Symbols for Welding, Brazing, Nondestructive Examination.
 - 2. B2.1/2.1M: Specification for Welding Procedure and Performance Qualification.
 - 3. D1.1/D1.1M: Structural Welding Code Steel.

D. ASTM International (ASTM):

- 1. A36/A36M: Standard Specification for Carbon Structural Steel.
- 2. A53/A53M: Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
- 3. A123/A123M: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
- 4. A153/A153M: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
- 5. A240/A240M: Standard Specification for Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
- 6. A276A/276M: Standard Specification for Stainless Steel Bars and Shapes.
- 7. A307: Standard Specification for Carbon Steel Bolts, Studs, and Threaded Rod 60,000 PSI Tensile Strength.
- 8. A384/A384M: Standard Practice for Safeguarding Against Warpage and Distortion During Hot-Dip Galvanizing of Steel Assemblies.

METAL FABRICATIONS SECTION 05 5000 21-1504

- 9. A385/A385M: Standard Practice for Providing High-Quality Zinc Coatings (Hot-Dip).
- 10. A500/A500M: Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
- 11. A554: Standard Specification for Welded Stainless Steel Mechanical Tubing.
- 12. A575: Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades.
- 13. A653/A653M: Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
- 14. A780/A780M: Standard Practice for Repair of Damaged and Uncoated Areas of Hot-Dip Galvanized Coatings.
- 15. A992/A992M: Standard Specification for Structural Steel Shapes.
- 16. A1008/A1008M: Standard Specification for Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
- 17. A1011/A1011M: Standard Specification for Steel, Sheet and Strip, Hot-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, and Ultra-High Strength.
- 18. C1107/C1107M: Standard Specification for Packaged Dry, Hydraulic-Cement Grout (Nonshrink).
- E. Metal Framing Manufacturer's Association (MFMA):
 - 1. Metal Framing Standards Publication.
- F. SSPC: The Society for Protective Coatings (SSPC):
 - 1. PA 1: Shop, Field, and Maintenance Painting of Steel.
 - 2. SSPC Guide 15: Field Methods for Extraction and Analysis of Soluble Salts on Steel and Other Nonporous Substrates.
 - 3. Surface Preparation Specifications:
 - a. SSPC SP 1: Solvent Cleaning.
 - b. SSPC SP 2: Hand Tool Cleaning.
 - c. SSPC SP 3: Power Tool Cleaning.
 - d. SSPC SP 15: Commercial Grade Power Tool Cleaning.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
- B. Coordination:

1. Miscellaneous metal items embedded in concrete shall be furnished to the respective trades for installation thereunder. Furnish setting templates and/or proper execution of work.

1.5 ACTION SUBMITTALS

A. Product Data: Submit list and complete descriptive data of all products proposed for use. Include manufacturer's specifications, published warranty or guarantee, installation instructions, and maintenance instructions.

1.6 INFORMATIONAL SUBMITTALS

- A. Certification for each welder.
- B. Sustainable Design:
 - 1. The following information shall be provided:
 - a. Paints and Coatings: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.

1.7 QUALITY ASSURANCE

- A. Conflicting Requirements: In the event of conflict between the applicable codes and regulations and the requirements of the referenced standards or these Specifications, the provisions of the more stringent shall govern.
- B. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- C. Use materials and products of one manufacturer whenever possible.
- D. Materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

E. Welding:

- 1. Use only qualified welders, certified and qualified in accordance with AWS D1/D1.1M.1o perform types of welding required.
- 2. All welding to be inspected in accordance with Section 05 1200. Welding inspector's qualifications shall be in accordance with AWS D1.1/D1.1M.
- 3. Procedures and operations shall comply with AWS B2.1/B2.1M.
- 4. Comply with most recent edition of AWS publication "Welding Zinc-Coated Steel" for galvanized products.
- F. Control of Corrosion: Prevent galvanic action and other forms of corrosion by insulating metals and other materials from direct contact with incompatible materials.

METAL FABRICATIONS SECTION 05 5000 21-1504

1.8 DELIVERY, STORAGE AND HANDLING

- A. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.
- B. Store materials in protected, dry conditions off of ground and in areas so as to not interfere with the progress of the Work.
- C. Transport, store and handle in strict accordance with the manufacturer's written recommendations.

1.9 FIELD CONDITIONS

A. Products shall be available at project when required for installation so as not to delay job progress. Installer for these products shall cooperate with installers performing work under other Sections involved to effect proper installation.

1.10 FIELD CONDITIONS

A. Make and be responsible for all field dimensions necessary for proper fitting and completion of work. Report discrepancies to Architect before proceeding.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

A. Structural Performance of Railing Assemblies, Handrails, and Guardrails:

1. General:

- a. In engineering stainless steel railing components to withstand structural loads indicated, determine allowable design working stresses of railing materials based on 60 percent of minimum yield strength.
- b. Glass: 25 percent of mean modulus of rupture (50 percent probability of breakage), as listed in "Mechanical Properties" in AAMA's Aluminum Curtain Wall Series CW-12, "Structural Properties of Glass."
- 2. Handrails and Top Rails of Guards:
 - a. Uniform load of 50 pounds/foot applied in any direction.
 - b. Concentrated load of 200 pounds applied in any direction.
 - c. Uniform and concentrated loads need not be assumed to act concurrently.
- Infill of Guards:
 - a. Concentrated load of 50 pounds applied horizontally on an area of 1 square foot
 - b. Infill load and other loads need not be assumed to act concurrently.

B. Industry Standards:

1. Comply with "Metal Rail Manual" of National Ornamental and Miscellaneous Metals Association (NOMMA).

2. Comply with "Pipe Railing Manual" of National Association of Architectural Metal Manufacturers (NAAMM).

2.2 METAL MATERIALS

A. Steel:

- 1. Steel Shapes, Plates and Bars: ASTM A36/A36M, unless noted otherwise on plans, except 'W' beams shall conform to ASTM A992/A992M.
- 2. Sheet: Commercial-quality, cold-rolled, stretcher-leveled, carbon-steel sheet complying with ASTM A1008/A1008M, Class I, matte finish.
- 3. Hollow Structural Sections (HSS): ASTM A500/A500M, Grade B.
 - a. Square and Rectangular: Fy=46 ksi.
 - b. Round: Fy= 42 ksi.
- 4. Pipe: ASTMA53/A53M, Type E or S, Grade B, Fy=35 ksi; hot dipped galvanized unless otherwise indicated or specified.
- 5. Hot-Rolled Carbon-Steel Bars: ASTM A575, grade as selected by fabricator.

B. Stainless Steel:

- 1. Alloy: Type 304 at interior, Type 316 at exterior, unless otherwise indicated or specified.
- 2. Sheet and Plate: ASTM A240/A240M.
- 3. Bars: ASTM A276/A276M.
- 4. Tubing for Railings and Guardrails: ASTM A554.
- 5. Finish on Exposed Surfaces: American Iron and Steel Institute (AISI) No. 4, satin directional brushed, unless otherwise noted.
- C. Galvanized-Steel Sheet: ASTM A653/A653M, G90 coating, either commercial steel or forming steel.

2.3 OTHER MATERIALS AND COMPONENTS

- A. Bolts and nuts: ASTM A307; machine bolts unless otherwise indicated or specified, galvanized when used with galvanized metal.
- B. Drilled-in Concrete Anchors: Hilti "Kwik Bolt TZ2" (ICC Report No. ESR-4266), Ramset T3 (ICC Report No. ESR-1955), or equal.
 - 1. Anchors shall be stainless steel for all exterior work.
 - 2. Testing of anchors is required.
- C. Drilled-in Masonry Anchors: Hilti "Kwik Bolt 3 (KB3)" (ICC Report No. ESR-2302), Ramset T3 (ICC Report No. ESR-1955), or equal.
 - 1. Anchors shall be stainless steel for all exterior work.
 - 2. Testing of anchors is required.

METAL FABRICATIONS SECTION 05 5000 21-1504

- D. Fasteners and Connectors:
 - 1. Bolts and Nuts: ASTM A307, Grade A and supplemental S1.
 - 2. Machine Screws: Cadmium plated steel, Fed. Spec. FF-S-92.
 - 3. Wood Screws: Flat-head carbon steel, Fed. Spec. FF-S-111.
 - 4. Plain Washers: Round, carbon steel, Fed. Spec. FF-W-92.
 - 5. Toggle Bolts: Tumbler-wing type, Fed. Spec. FF-B-588, type, class, and style as required.
 - 6. Lock Washers: Helical spring type carbon steel, Fed. Spec. FF-W-84.
 - 7. Lag Bolts: Square head type, Fed. Spec. FF-B-561.
 - 8. Tamper Resistant Fasteners: Snap-off head, or recessed socket for hex wrench with central pin.
 - 9. Security Fasteners: Unless otherwise noted, security screws and bolts shall be minimum 3/8"-20 stainless steel security socket pin requiring special tool; 8 inches on center maximum.
- E. Non-Metallic, Non-Shrink Grout: Premixed, conforming to ASTM C1107/C1107M, with minimum compressive strength of 5000-psi at 28-days.

2.4 GALVANIZING

- A. Surface Preparation Prior to Galvanizing: In accordance with SSPC Specification SP-5, "Commercial Grade Power Tool Cleaning.".
- B. The following items shall be hot dip galvanized after fabrication into largest practical section in accordance with ASTM A385/A385M:
 - 1. Exterior items including those penetrating an exterior wall and only with partial exposure to exterior.
 - 2. Items embedded in or anchored to concrete at exterior of building even if not directly exposed or visible.
 - 3. Interior Items: Only where noted or specified to be galvanized.
- C. Comply with ASTM A153/A153M for galvanizing of iron and steel hardware.
- D. Comply with ASTM A123/A123M for galvanizing of assembled steel products and rolled, pressed, and forged-steel shapes, plates, bars, and strips 1/8-inch thick and heavier.
- E. Safeguarding against warping and distortion during hot-dip galvanizing of metal fabrications shall be in conformance with ASTM A384/A384M.
- F. Weight of zinc coating shall be not less than 2 ounces per square foot of surface.
- G. Newly galvanized items shall not be water quenched or chromate quenched after galvanizing if they are scheduled to receive a paint coating.
- H. Where damaged, repair surface with specified Galvanized Metal Repair Compound.

2.5 PROTECTIVE COATINGS

A. Products:

- 1. Galvanizing-Repair Paint: Minimum 95 percent zinc-dust-content in dried film paint for regalvanizing welds in galvanized steel; "Z.R.C. Cold Galvanizing Compound" by ZRC Worldwide, "Cold Galv Primer" by Valspar, or equal. Where repaired galvanizing is to be left exposed, use repair paint that will closely match appearance of hot-dip galvanizing; "Galvilite" by ZRC Worldwide, or equal.
- 2. Shop Primer for Ferrous Metal Not Galvanized:
 - a. Interior: Modified alkyd; Tnemec Series "FD88 Azeron", or equal.
 - b. Exterior: Inorganic, zinc-rich; "Tneme-Zinc 90-97," or equal.
- 3. Field-Applied Finish Paints: As specified in Section 09 9100, Painting.

B. Galvanized Surfaces:

- 1. Repair zinc coating damaged after fabrication with specified repair paint in accordance with ASTM A780/A780M, AHDGA publication, "Recommended Practice for Touch-up of Damaged Galvanized Coatings," and manufacturer's recommendations for application of repair paint.
- 2. Zinc-coated surfaces to be painted shall be chemically treated and finished painted as specified in Section 09 9100, Painting.

C. Shop Priming:

- 1. Thoroughly clean steel of all loose mill scale, rust splatter, slag or flux deposits, oil, dirt, and other foreign matter as specified.
- Stainless steel, surfaces to be epoxy painted, galvanized, or epoxy-coated, surfaces and anchors encased in concrete, surfaces to be grouted against, and surfaces and edges to be field welded shall not be primed, unless otherwise indicated.
- 3. Soluble Salts: Removal of soluble salts from bare metal is required prior to application of primer coats, to preclude pre-mature coating failure and accelerated corrosion, in accordance with SSPC Guide 15.
- 4. Surface Preparation Prior to Priming:
 - a. Galvanized Surfaces: SSPC No. 1.
 - b. Concealed Items: SSPC No. 2 or No. 3.
 - c. Exposed Items: SSPC SP 15.
- D. After cleaning, except where other finishes are specified, all ferrous metal shall be given one shop coat of specified primer. Parts inaccessible after assembly or erection shall be given two coats of specified primer, second coat darker in color.
 - 1. Primer paint shall be compatible with required finish coat.
 - 2. Apply primer within 8 hours of preparation of surface or sooner if necessary to prevent rusting.

METAL FABRICATIONS SECTION 05 5000 21-1504

- 3. Primer shall be applied to a minimum dry film thickness recommended by coating manufacturer.
- 4. Paint application shall be in accordance with SSPC PA1.
- E. Surfaces to be welded shall be protected from painting by use of masking. Inadvertent overspray on surfaces to be welded shall be removed by wire brushing.
- F. Finish Painting: As specified in Section 09 9100, Painting. Finish exposed fasteners to match adjacent metal.

2.6 FABRICATION - GENERAL

A. General:

- 1. Fabrication, material and installation shall be as indicated and as specified. Examine Drawings for additional work required.
- 2. Angle frames and supports attached to or embedded in concrete construction shall be galvanized after fabrication.

B. Mechanical Connections:

1. Sizes of bolts, screws or other threaded fasteners or anchorage not shown on drawings shall be of size required to meet intended use of item or assembly.

C. Welding:

- Weld in accordance with recommendations of AWS.
 - a. Except where bolted connections are shown, weld all joints and assemblies.
 - b. Welds not shown on Drawings shall be designed to meet intended use of item or assembly.
- 2. Welding shall be done in a sequence, which minimizes distortion and shrinkage.
- 3. Electrodes preheat and welding process shall meet AWS prequalification requirements and the electrode manufacturer's written recommendations for specific applications.
- 4. Headed concrete anchors and deformed bar anchors shall be shop welded in accordance with AWS C5.4 and AWS D1.1/D1.1M.
- 5. Provide additional dressing of welds where specified.
- 6. Finishing: Provide the following additional requirements and finishing of welds for custom fabricated items where specified.
 - a. Mill markings shall be completely removed.
 - b. Welds shall be continuous.
 - c. Dress exposed and contact surfaces.
 - d. Finish exposed surfaces to smooth, sharp, well-defined lines and arris.
 - e. Welds, burrs, roller marks, seams, and rough surfaces shall be ground neat and smooth.
 - f. Gouges, dents, and other surface abuse shall be filled and ground smooth.

2.7 CUSTOM FABRICATED ITEMS

- A. Pipe Handrails: Fabricate and install as indicated, complete with rails, posts, fittings, brackets and anchorage.
 - 1. Wherever practical, construct bends and sweeps by bending pipe. Use suitable pipe bending jigs to prevent crushing pipe. For short radius bends and sweeps, use formed, flush, welding type fittings.
 - 2. Except where bolted connections are indicated, welding shall comply with the specified "Finishing" requirements.
 - 3. Bolts, fasteners, and miscellaneous items at exterior handrails shall be galvanized.
- B. Railings: Fabricate from material indicated.
 - 1. Ease corners.
 - 2. Pipe shall be smooth without rough spots, voids or other such imperfections, ready for paint.
 - 3. Welding shall comply with the specified "Finishing" requirements.
 - 4. Bolts, fasteners, and miscellaneous items at exterior railings shall be stainless steel or galvanized.

C. Rough hardware:

- 1. Provide bent or otherwise custom fabricated bolts, plates, anchors, hanger, dowel, and other miscellaneous steel and iron shapes as required for framing and for anchoring or securing framing to concrete and other structures.
- D. Miscellaneous Framing and Supports:
 - 1. Provide miscellaneous steel framing and supports which are not part of structural steel framework, as required to complete work.
 - 2. Fabricate miscellaneous units to sizes, shapes and profiles shown; or if not shown, to require dimensions to receive adjacent other work to be retained by framing.
 - 3. Fabricate the miscellaneous units from structural steel shapes, plates, and steel bars of welded construction with mitered joints for field connection, unless shown otherwise.
 - 4. Cut, drill and tap units to receive hardware.
 - 5. Equip units with integrally welded anchors for casting into concrete or building into masonry, and furnish inserts if units must be installed after concrete is placed.
 - 6. Except as otherwise shown, space anchors 24 inches on center and provide minimum anchor units of 1-1/4 inch x 1-1/4 inch x 8 inch steel straps.
 - 7. Galvanized miscellaneous frames and supports where indicated.
- E. Metal backing plates, anchor plates, and similar items required for anchorage of mechanical and electrical fixtures and equipment to metal support framing shall be furnished and installed under the respective framing Section.

METAL FABRICATIONS SECTION 05 5000 21-1504

2.8 MANUFACTURED ITEMS

A. Handrail Brackets:

1. General:

- a. Provide handrail brackets complete with hanger bolts at locations as indicated on the Drawings.
- b. Secure to solid backing or backing plates as indicated on the Drawings.
- c. Secure to handrail with fasteners in accordance with bracket manufacturer's recommendations.
- 2. Handrail Brackets with Concealed Fasteners: Julius Blum & Co., Inc. Model No. 378 (curved seat), J.G. Braun Company Model No. 4595 (curved seat), or equal.
 - a. Brackets shall be 3-1/4 inch diameter with a curved seat to receive circular railing centered 2-1/2 inches from face of finish wall.
 - b. Bracket shall be malleable iron for a painted finish.

Finishes:

- a. Channel Supports: Manufacturer's standard prime paint finish.
- b. Anchors and Fasteners: Galvanized or plated.
- c. Components, fasteners, and anchors at exterior or exposed to weather shall be galvanized with G90 coating.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Prior to all work of this Section, carefully inspect and verify that the installed work of all other trades is complete to the point where fabrication and installation of the work of this Section may properly commence.
- B. Make all required measurements in the field to ensure proper fit of miscellaneous metal items.
- C. Verify that miscellaneous metal may be fabricated and installed in strict accordance with the original design and the approved Shop Drawings.
- D. In the event of discrepancy, immediately notify the Architect. Do not proceed with fabrication or installation in discrepant areas until discrepancies have been fully resolved.

3.2 PREPARATION

A. Furnish setting drawings, diagrams, templates, instructions and directions for installation of anchorages, such as concrete inserts, anchor bolts, and miscellaneous items having integral anchors, which are to be embedded in concrete construction. Coordinate delivery of such items to project site.

3.3 INSTALLATION – GENERAL

- A. Install miscellaneous metals and accessories in accordance with reviewed Shop Drawings, referenced standards, manufacturer's installation recommendations or as directed by Architect.
- B. Field Welding: Comply with requirements specified for shop welding and the following.
 - 1. Weld connections that are not to be left as exposed joints but cannot be shop welded because of shipping size limitations.
 - 2. Where specified, grind exposed welded joints smooth and restore finish to match finish of adjacent surfaces.

C. Fastening to In-Place Construction:

- 1. Provide anchorage devices and fasteners where necessary for securing miscellaneous metal fabrications to in-place construction including threaded fasteners for concrete inserts, toggle bolts, through-bolts, lag bolts, wood screws and other connectors as required.
- 2. Adhesive anchors shall only be used at concrete block and only at locations where detailed.

D. Cutting, Fitting and Placement:

- 1. Perform cutting, drilling and fitting required for installation of miscellaneous metal fabrications.
- 2. Set work accurately in locations, alignment and elevations, and make plumb, level, true and free from rack, measured from established lines and levels.
- 3. Provide temporary bracing or anchors in formwork for items which are to be built into concrete or similar constructions.
- 4. Fit exposed connections accurately together to form tight hairline joints.
- 5. Weld connections which are not to be left as exposed joints, but cannot be shop welded because of shipping size limitations.
- 6. Grind exposed joints smooth where specified and touch-up shop paint coat.
- 7. Do not weld, cut or abrade the surfaces of exterior units which have not been hotdip galvanized after fabrication and are intended for bolted or screwed field connections.
- E. Provide isolation of dissimilar metals from contact with one another with two coats of primer or accepted equal isolation system.

3.4 INSTALLATION OF RAILINGS

- A. Furnish post setting sleeves to concrete trade; direct and supervise proper setting and location of sleeves. Set railing posts and grout between posts and setting sleeves with non-shrink grout.
- B. Secure posts and rails to metal with welded or bolted connection.

METAL FABRICATIONS SECTION 05 5000 21-1504

- C. Longitudinal members shall be parallel to each other, to floor surface, or to slope of stairs as shown.
- D. Center line of members within each railing run shall be in same vertical plane.
- E. Adjust railings prior to securing in place to ensure proper matching at butting joints and correct alignment throughout their length. Plumb posts in each direction. Remove any burrs or protrusions that might snag fingers or clothing, and grind and polish smooth.

F. Handrail Brackets:

- 1. Secure wall railing brackets to stud wall construction with bolts into backing plates fastened to studs.
- 2. Space brackets maximum 60 inches on center and 9 inches from end of rails.
- 3. Return rails to walls at ends.

3.5 TOUCH-UP AND REPAIR

- A. Immediately after erection, clean connections including field welds and bolted connections and paint exposed areas with same material used for shop priming. Brush or spray-apply to provide minimum dry film thickness of 2 mils.
- B. After installation of this Section is complete, touch-up all damaged and abraded paint on installed assemblies, using paint specified for shop priming.
- C. Touch-up damaged areas in shop primed surfaces which will be concealed after erection. Leave in condition fit for finish painting by other trades.
- D. Repair or replace defective materials as directed.
- E. Adjust and lubricate hardware and leave entire installation clean and in good operating condition.

3.6 PROTECTION

- A. Protect work and materials of this Section prior to and during installation and protect the installed work and materials of other trades.
- B. Protect installed work from damage from other trades.
- C. In the event of damage, make all repairs and replacements necessary to the approval of the Architect at no additional cost to the Owner.

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\05 5000_metal fabrications.docx Last Updated: November 10, 2021

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Code required signage.
 - 2. Exterior building identification and other non-code signage.

1.2 RELATED REQUIREMENTS

- A. Section 01 6116, Volatile Organic Compound (VOC) Restrictions; for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- B. Division 26, Electrical.
- C. Signage requirements included on the Drawings.

1.3 REFERENCES AND STANDARDS

- A. California Building Code, edition as noted on the drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on drawings, as adopted by the California Division of the State Architect (DSA).
- C. Title 19, CCR, Article 33.01(i).
- D. American National Standards Institute (ANSI):
 - 1. A-117.1: Accessible and Usable Buildings and Facilities.
- E. ASTM International (ASTM):
 - 1. A53/A53M: Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless.
 - 2. A153/A153M: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
- B. Coordination:

SIGNAGE SECTION 10 1400 21-1504

- 1. Prior to production of shop drawings and samples, coordinate a pre-submittal conference with Architect to confirm submittal requirements, schedule, and sign review process.
- For signs supported by or anchored to permanent construction, advise installers
 of anchorage devices about specific requirements for placement of anchorage
 devices and similar items to be used for attaching signs. Provide template for
 placement of sign-anchorage devices embedded in permanent construction by
 other installers.

1.5 ACTION SUBMITTALS

A. Shop Drawings:

- 1. Scaled drawings and signage schedule for each sign indicating materials, lettering layout, and colors.
- B. Product Data: Submit list and complete descriptive data of all products proposed for use. Include manufacturer's specifications, published warranty or guarantee, installation instructions, and maintenance instructions.

C. Samples:

- 1. Submit three samples of specified signage fonts to be used for visual and tactile characters including braille below the raised characters.
- 2. Color Verification: Provide physical sample of each available color form the manufacturer. Include color system name and serial number, code and name as applicable.
- 3. Control Samples. Samples shall be prepared on same base material to be used in fabrication. Submit one sample of each sign type. Signage types are indicated in Construction Document details. Interior signs shall be full size.
- 4. Symbol of Accessibility and Pictograms. Full scale sample of pictograms and symbol of accessibility to be used on sign panels and graphics.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For installer.

B. Sustainable Design:

- 1. The following information shall be provided:
 - a. Adhesives and Sealants: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.
- C. Sample of manufacturer's warranty.
- D. Signage Schedule and Alphanumeric Nomenclature. As a component of shop drawings and informational submittals, verify with Architect the sign nomenclature; room names and numbers; text; and orientation of wayfinding pictorial graphics.

1.7 CLOSEOUT SUBMITTALS

- A. Warranty/Guarantee: Submit executed warranty and Subcontractor's guarantee.
- B. Maintenance data for signs and sign types including maintenance manuals.

1.8 QUALITY ASSURANCE

- A. Contractor shall assure that the vendor shall be responsible for the quality of materials and workmanship of any firm acting as the vendor's subcontractor.
- B. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- C. Use materials and products of one manufacturer whenever possible.
- D. Materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.
- E. The adhesion of inlaid letters and symbols will be tested. See Article WARRANTY.
- F. Mockups:

1.9 DELIVERY, STORAGE AND HANDLING

- A. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.
- B. Store materials in protected, dry conditions off of ground and in areas so as to not interfere with the progress of the work.
- C. Transport, store and handle in strict accord with the manufacturer's written recommendations.

1.10 FIELD MEASUREMENTS

A. Make and be responsible for all field dimensions necessary for proper fitting and completion of work. Report discrepancies to Architect before proceeding.

1.11 WARRANTY

- A. Manufacturer: In addition to the Contractor's and Subcontractor's Guarantee, furnish Owner with manufacturer's available fully executed written warranty for signage against all defects in materials and workmanship, including without limitation against yellowing, cracking, crazing, and other visible and performance defects for a period of 5 years.
 - 1. Text, pictograms or symbols that can be removed from the sign face utilizing a sharp object or other conventional methods will be considered a manufacturing defect.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

- A. Regulatory Standards:
 - 1. Except as otherwise specified or shown, signage shall conform to the following:
 - a. ANSI A-117.1 and the Americans with Disabilities Act (ADA).
 - b. ATBCB Design Guidelines for Signage in relation to the Americans with Disabilities Act.
 - c. California Code of Regulations, Titles 19 and 24.
 - 1) Contracted Grade 2 Braille shall be used whenever Braille symbols are specifically required. Refer to CBC Section 11B-703.3.
 - 2) All signage shall conform to CBC Section 11B-703.
 - d. Uniform Sign Code.
 - 2. When there is a conflict between the CBC and ADA, comply with the most stringent.
- B. Design Criteria: Refer to Chapter 11B of the California Building Code.
 - 1. Raised Characters: Section 11B-703.2.
 - a. Depth: Section 11B-703.2.1.
 - b. Case: Section 11B-703.2.2.
 - c. Style: Section 11B-703.2.3.
 - d. Character Proportions: Section 11B703.2.4.
 - e. Character Height: Section 11B-703.2.5.
 - f. Stroke Thickness: Section 11B-703.2.6.
 - g. Character Spacing: Section 11B-703.2.7.
 - h. Line Spacing: Section 11B-703.2.8.
 - i. Installation Height and Location: Section 11B-703.4.
 - 2. Braille: Section 11B-703.3.
 - a. Contracted (Grade 2) Braille with rounded or domed dots shall be used wherever Braille is required.
 - 1) Braille dimensions in accordance with Table 11B-703.3.1.
 - 3. Visual Characters: Section 11B-703.5.
 - a. Character Proportions: Section 11B-703.5.4.
 - b. Stroke Thickness: Section 11B-703.5.7.
 - c. Character Spacing: Section 11B-703.5.8.
 - d. Line Spacing: Section 11B-703.5.9.
 - 4. Pictograms: Section 11B-703.6.
 - a. Pictogram Field: 11B-703.6.1.
 - 1) Characters and Braille shall not be located in the pictogram field.
 - b. Finish and Contrast: Section 11B-703.6.2.

- 1) Pictograms and their field shall have a non-glare finish. Pictograms shall contrast with their field with either a light pictogram on a dark field or a dark pictogram on a light field.
- c. Text Descriptors: Section 11B-703.6.3.
 - 1) Locate text descriptors directly below the pictogram field.
 - 2) Text shall be raised characters with braille directly below.
- 5. International Symbol of Accessibility: Section 11B-703.7.2.1.
- 6. Toilet Room Door Symbols: Section 11B-703.7.2.6.
- 7. Tactile Exit Signs: Tactile exit signage to comply with 1013.4 and 11B-703.4.

C. Sustainable Design:

- 1. VOC emissions for field-applied adhesives, sealants, and sealant primers must comply with limits specified in Section 01 6116.
- D. Materials, Unless Otherwise Noted:

Manufacturer and Product: "Inlaid Tactile Sign" by Accent Signage Systems, Inc. Minneapolis, MN, 800-215-9437 as specified and the basis of design; Ellis & Ellis Sign Systems, Sacramento, CA, 916-924-1936; ASI-Modulex, Los Altos, CA, 650-940-1354; Weidner Architectural Signage, Sacramento, CA; or equal.

- 1. Sign Face: Two 1/8-inch plies with eased edges; New Hermes "Gravo-Tac," or equal.
 - a. Total Thickness: 1/4 inch.
 - b. Painted signs will not be accepted.
- 2. Tactile Text: Provide tactile text and "Raster" Braille at plastic tactile signage.
 - a. Tactile text shall be inlaid into sign face 1/32-inch and raised 1/32- inch minimum above sign face surface.
 - b. Inlaid text shall be 1-ply, 1/16-inch thick material; "Gravo-Tac" Exterior or equal.
 - c. Provide text and graphics precisely formed, uniformly opaque to comply with relevant ADA regulations and requirements indicated for size, style, spacing, content, position and colors.
 - d. Symbols where specified shall be International Style.
 - e. Braille shall be Contracted (Grade 2) Braille.
 - Dots shall be 0.10-inch on centers in each cell, 0.30-inch on center between corresponding dots in adjacent cells, and 0.395-inch minimum to 0.400-inch maximum on center between corresponding dots in cell directly below.
 - 2) Dots shall be raised a minimum of 0.025-inch and a maximum of 0.037-inch above the background, and a base diameter of 0.059-inch minimum and 0.063- inch maximum.
 - 3) Dots with straight sides and flat tops are not acceptable.
- 3. Colors: High contrast, non-glare, integral colors for graphics.
 - a. Integral materials shall be U.V. stabilized.

SIGNAGE SECTION 10 1400 21-1504

b. Characters, symbols and pictograms shall be in high contrast (light color) with background (dark) color and must conform to the CBC and the ADA Standards.

E. Fabrication:

- 1. Panel Appearance: Manufacturer's standard, high contrast, semi-matte colors.
- 2. Surface Texture: Matte Non-glare.
- 3. Character Style, Size and Layout Position:
 - a. Characters shall be 1-inch high, unless otherwise indicated.
 - b. The stroke of the uppercase letter "I" shall be 15 percent maximum of the height of the character.
 - c. The width of the uppercase letter "O" shall be 60 percent minimum and 110 percent maximum of the height of the uppercase letter "I".
 - d. Character style to be Sans Serif, uppercase, accompanied by Braille directly below text at all locations where raised characters are required.
 - e. Spacing between baselines of separate lines of raised characters with a message shall be 135 percent minimum and 170 percent maximum of the raised character height.
- 4. Text Schedule: Confirm text, symbols and numbering with the Architect and Owner.
- 5. Sign Size: As indicated on the Drawings or, if not shown, as reasonably required to accommodate text, symbols and Braille.
 - a. Where signs are installed on window glazing, fabricate a blank sign back to match in size and shape to sign.
 - b. Sign backs shall cover back side of sign from view through window on opposite side of sign.
 - c. Signs that are mounted back-to-back on glazing are to be matching in size; the smaller sign is to be increased in size as reasonably required to match the larger sign.
- 6. Sign Shape: As indicated on the Drawings.
 - a. Corners: Radiused, unless otherwise shown.
- 7. Inlaid Letter Adhesion Process: Inlaid material shall be adhered into 1/32-inch deep routed sign face utilizing the heat and pressure bonded/chemically welded process as developed by Accent Signage Systems for the specified "Inlaid Tactile Sign."
 - a. Sign manufacturers for the specified "Inlaid Tactile Sign" shall be familiar with and utilize the exact same manufacturing process developed by Accent Signage Systems.
 - b. Manufacturer must utilize the same and required equipment, products and techniques necessary to produce authentic "Inlaid Tactile Signs" as developed by Accent Signage Systems.
 - c. Other adhesive products and methods, including applied adhesive tapes will not be accepted.

- F. Sign Types: Provide braille translation directly below the raised characters.
 - 1. Toilet Room Identification Sign: In addition to the specified Door Symbol, provide a Toilet Room Identification Sign at the strike side of every toilet room door.
 - a. Sign shall include an International Symbol of Accessibility, pictogram, and raised characters, specifying the room name with Braille translation below pictogram.

2.2 PLASTIC SIGNS - NON-TACTILE

A. Materials, Unless Otherwise Noted:

Manufacturer and Product: Acrylic panel sign as manufactured and distributed by Ellis & Ellis Sign Systems, 916-924-1936, as specified and the basis of design, or equal.

- 1. Sign Face: 1/4-inch, matt finish, non-glare acrylic with subsurface vinyl and paint. Painted faces will not be accepted.
- 2. Colors: Colors shall match specified Tactile Signs and as selected by Architect and Owner.
 - a. Integral materials shall be U.V. stabilized.
 - b. Graphics and text shall be in high contrast (light color) with background (dark) color.

B. Fabrication:

- 1. Sign Thickness: 1/4-inch.
- 2. Character Style, Size and Layout Position:
 - a. Characters shall be a minimum of 1-inch high, unless otherwise indicated.
 - b. The stroke thickness of the uppercase letter "I" shall be 10 percent minimum and 20 percent maximum of the height of the character.
 - c. The width of the uppercase letter "O" shall be 60 percent minimum and 110 percent maximum of the height of the uppercase letter "I".
 - d. Letter style to be Sans Serif, uppercase.
 - e. Space characters 10 percent minimum and 35 percent maximum of height of characters, measured between two closest points of adjacent characters, excluding word spaces.
 - f. Spacing between baselines of separate lines of characters within a message shall be 135 percent minimum and 170 percent maximum of character height.
- 3. Text Schedule: Confirm text, symbols and numbering Architect and Owner using the shop drawing/submittal process.
- 4. Sign Size: As indicated on the Drawings or, if not shown, as reasonably required to accommodate text and symbols.
 - a. Where signs are installed on window glazing, fabricate a blank sign back to match in size and shape to sign.
 - b. Sign backs will cover back side of sign from view through window on opposite side of sign.

SIGNAGE SECTION 10 1400 21-1504

- 5. Sign Shape: As indicated on the Drawings or, as reasonably required to accommodate the specified text and size at lettering.
 - a. Corners: 1/4-inch radius, unless otherwise shown.

C. Sign Types:

- Toilet Room Door Symbol: Provide one of the following symbols as appropriate to the toilet room type. Toilet Room Door Symbols shall have a color contrast that is distinctly different from the color of the door. Characters, as shown, to be flush with face of symbol. The entire background color must contrast with door. A thin contrasting border around the symbol, with remainder of sign background in a noncontrasting color is not allowed.
 - a. Girls: 12-inch diameter circle, with eased edges.
 - b. Boys: Equilateral triangle with sides 12-inches long, with eased edges.
 - c. Women: 12-inch diameter circle, with eased edges.
 - d. Men: Equilateral triangle with sides 12-inches long, with eased edges.
 - e. Unisex or Staff: equilateral triangle of contrasting color and super imposed on and geometrically inscribed within the face of 12-inch diameter circle, which is a contrasting color to the door. The vertices of the triangle symbol shall be located ¼-inch maximum from the edge of the circle with the vertex pointing upward. Both the circle and triangle to have eased edges.

2.3 METAL SIGNS

A. Letter Style:

- 1. The stroke thickness of the uppercase letter "I" shall be 10 percent minimum and 20 percent maximum of the height of the character.
- 2. The width of the uppercase letter "O" shall be 60 percent minimum and 110 percent maximum of the height of the uppercase letter "I".
- 3. Letter style to be Sans Serif, uppercase.

B. Metal Reflectorized Signs:

- 1. Blue reflective vinyl background with white copy or symbol on 0.080 aluminum unless noted otherwise:
 - a. Disabled Accessible Parking Stall:
 - 1) International Symbol of Accessibility with text below to read "MINIMUM FINE \$250".
 - 2) Pole mounted.
 - b. Van Accessible Parking Stall:
 - 1) Same as Standard Accessible Parking Stall sign with text below to read "VAN ACCESSIBLE".
 - 2) Pole mounted.
- 2. Parking Lot Entrance: Text as shown on the Drawings, on dark blue background.
- C. Metal Painted Signs: Baked enamel on steel.

- 1. Gate Sign: 4-inch high lettering in all caps to read: "EXIT".
 - a. Provide at exit gate(s) as shown.
 - b. Colors: As selected by Architect.

PART 3 - EXECUTION

3.1 **EXAMINATION**

- A. Prior to installation, carefully inspect and verify that the installed work of other trades is complete to the point where this installation may properly commence.
- B. Verify that specified items may be installed in accordance with the approved design.
- C. In the event of discrepancy, immediately notify Architect. Do not proceed in discrepant areas until discrepancies have been fully resolved.

3.2 INSTALLATION OF SIGNS

- A. General: Locations of signs must be in accordance with the Drawings and approved shop drawings.
- B. Plastic Signs:
 - 1. General:
 - a. Provide both mechanical fasteners and either adhesive or 2-sided adhesive tape as recommended by manufacturer for given mounting substrate.
 - b. Fasteners: Minimum 4-recessed flush head tamper-proof (vandal-resistant) screws per sign.
 - 2. Wood and Metal Framed Walls: Mechanical fasteners shall be of adequate length to penetrate exterior finishes and provide secure embedment into wall structure or sheathing.
 - 3. Masonry Walls:
 - a. At split-face concrete masonry (CMU) walls, Contractor shall be responsible for providing a "bushed-down," level, rectilinear, and smooth, area, 1/2-inch larger than sign all around for flush sign mounting.
 - b. Contractor shall not grind or prep CMU wall until signs are on site and exact sign size and location are verified and approved by Architect.

4. Glass:

- a. Utilize mounting adhesive and silicone where signs are mounted to glass.
- b. Provide vinyl window sign backer to match sign face size, mounted on opposite side of glass.
- c. Signs mounted back-to-back are to be matching in size.
- d. Do not pre-drill signs for mechanical fastening where sign is to be mounted to glass.

C. Pole Mounted:

SIGNAGE SECTION 10 1400 21-1504

- 1. General:
 - a. Mount signs using galvanized steel carriage bolt with hex nut and washer.
 - b. Touch up bolt head with paint to match background.
- 2. Accessible Parking Stall Sign:
 - a. Provide one sign at each stall.
- 3. Parking Lot Entry Sign: Provide sign at location and height as indicated on the Drawings.
- 4. Pole: ASTM A53, Grade B, hot-dip galvanized in accordance with ASTM A153.
 - a. Diameter and Height: As shown on the Drawings.
- 5. Foundations: Pole mounted signs shall be mounted in concrete footing as shown on the Drawings.

3.3 PROTECTION

- A. Protect work and materials of this Section and other Sections prior to and during installation, and protect the installed work and materials of all other trades.
- B. In the event of damage, immediately make all repairs and replacements necessary to the approval of the Architect and at no additional cost to the Owner.

3.4 ADJUSTING AND CLEANING

A. Remove all dust, dirt, finger marks, etc. from signs and letters using cleaning methods as recommended by manufacturer.

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\10 1400_ signage.docx Last Updated: March 30, 2021

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Floor-supported, overhead-braced, solid plastic toilet partitions.
 - 2. Solid plastic urinal screens.

1.2 RELATED REQUIREMENTS

- A. Section 01 6116, Volatile Organic Compound (VOC) Restrictions; for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- B. Section 10 2800, Toilet Accessories.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. National Fire Protection Agency (NFPA)
 - 1. NFPA 286: Fire Test for Evaluation Contribution of Wall and Ceiling Interior Finish to Room Fire Growth.
- D. ASTM International (ASTM):
 - 1. A 167: Standard Specification for Stainless and Heat-Resisting Chromium. Nickel Steel Plate.
 - 2. B 221: Standard Specification for Aluminum and Aluminum-Alloy Extruded Bars, Rods. Wire. Profiles and Tubes.
 - 3. E 84: Test Method for Surface Burning Characteristics of Building Materials.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
- B. Scheduling and Coordination:

PLASTIC TOILET COMPARTMENTS SECTION 10 2113 21-1504

- 1. Floor anchor plates for partitions shall be secured to structural subfloor prior to installation of mortar setting bed for tile floor.
- 2. Coordinate with placement of support framing and anchors in walls.

1.5 ACTION SUBMITTALS

- A. Shop Drawings: Submit plan, interior elevations and details showing components, connections and anchorages, adjacent materials, fully dimensioned and noted. Include blocking layout for use in structural framing.
- B. Product Data: Submit list and manufacturer's complete descriptive data of products proposed for use. Include manufacturer's installation and maintenance instructions.

C. Samples:

- 1. 6-inch-square or larger sample of panel corner in selected color, showing core, edge treatment, and corner treatment.
- 2. Manufacturer's full range of colors for Architect's selection.
- 3. Hardware samples, if requested by Architect.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For manufacturer and installer.
- B. Certification: Submit certification showing independent testing that compartments comply with NFPA 286.
- C. Evidence that plastic panels are Greenguard Certified
- D. Sample of manufacturer's warranty.

1.7 CLOSEOUT SUBMITTALS

A. Warranty/Guarantee: Submit executed warranty and Subcontractor's guarantee.

1.8 QUALITY ASSURANCE

A. Qualifications:

- 1. Manufacturer: Minimum 5 years' experience in manufacturing of solid plastic (HDPE) toilet compartments with products in satisfactory use under similar service conditions.
- 2. Installer: Minimum 5 years' experience in work of this Section.
- B. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- C. Single-Source Responsibility: Use materials and products of one manufacturer whenever possible.

D. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

1.9 DELIVERY, STORAGE AND HANDLING

- A. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.
- B. Store materials in protected, dry conditions off of ground and in areas so as to not interfere with the progress of the work.
- C. Transport, store and handle in strict accord with the manufacturer's written recommendations to avoid deformation.

1.10 FIELD MEASUREMENTS

A. Make and be responsible for all field dimensions necessary for proper fitting and completion of work. Report discrepancies to Architect before proceeding.

1.11 WARRANTY

- A. Manufacturer: In addition to the Contractor's and Subcontractor's Guarantee, furnish Owner with manufacturer's fully executed written warranty for plastic toilet partition system against defects in materials and workmanship including breakage, warpage, corrosion or delamination of installed plastic components, door latch and strike, integral hinge system and stainless steel shoes and wall brackets for a period of 25 years.
 - 1. Defective components shall be replaced.
 - 2. Labor for reinstallation shall be included.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

- A. Comply with accessibility requirements of CBC Section 11B-604, "Water closets and toilet compartments," and ADA "Standards for Accessible Design." Comply with the most stringent where there is a conflict.
- B. Brace partitions to structure to meet seismic provisions of the CBC.
- C. Fire Resistance when Tested in accordance with ASTM E 84:
 - 1. Smoke Developed Index: Not to exceed 450.
 - 2. Flame Spread Index: Not to exceed 75.
 - 3. Material Fire Ratings:
 - a. Test Method: NFPA 286.
 - b. Rating: International Code Council (ICC) Class A.

D. Sustainable Design:

PLASTIC TOILET COMPARTMENTS SECTION 10 2113 21-1504

1. Plastic panels shall be Greenguard Certified.

2.2 TOILET COMPARTMENTS

A. Manufacturer and System: "Hiny Hiders" by Scranton Products, or equal:

2.3 MOUNTING CONFIGURATIONS

- A. Toilet Enclosures: Floor-supported, overhead-braced.
- B. Urinal-Screen Style: Post-to-ceiling supported flat panel.

2.4 MATERIALS AND COMPONENTS

- A. Doors, Panels and Pilasters:
 - 1. Material: High density polyethylene (HDPE), fabricated from polymer resins compounded under high pressure, forming single thickness panel.
 - Surface Characteristics: HDPE shall be waterproof and nonabsorbent, with self-lubricating surface, resistant to marks by pens, pencils, markers, and other writing instruments.
 - 2. Minimum Finished Thickness:
 - a. Panels and Urinal Screens: 1 inch straight cut with fine radius edge.
 - b. Stiles: 1 inch straight cut with fine radius edge.
 - c. Doors: 1 inch straight cut with fine radius edge.
 - 3. Door Width:
 - a. Typical: 24 inch minimum.
 - b. Accessible Stalls: Sized to provide minimum 36 inch clear opening.
 - 4. Door and Panel Height: 55 inches mounted 14 inches above finish floor.
 - 5. Urinal Screens:
 - a. Height: 42 inches mounted 14 inches above floor.
 - b. Depth: 18 inches.
- B. Leveling Device: 7-gauge (0.0874 inch) hot rolled steel bar; chromate-treated and zincplated; through-bolted to base of solid color reinforced composite stile.
- C. Stile Shoes: Type-304, 20-gauge (0.036 inch) stainless steel with satin finish.
 - 1. Top shall have 90 degree return to stile.
 - 2. Shoe shall be one-piece and capable of being securing fastened to stiles.
- D. Headrails: 1-inch x 1-5/8-inch minimum, heavy-duty tubular stainless steel or extruded anodized aluminum, satin finish, anti-grip profile.
- E. Floor to Ceiling Posts: 1-1/4 inch square x 18 gauge stainless steel with satin finish, full height, where indicated.
- F. Other Components: Non-corroding metal.

2.5 HARDWARE AND FITTINGS

A. General:

- 1. Hardware shall be ADA and accessibility compliant.
- 2. All hardware to be 18-8, type-304 stainless steel with satin finish.
- 3. Hardware of chrome-plated "Zamak", aluminum, or plastic is unacceptable except as otherwise specified.
- 4. All hardware to be Vandal-Resistant, Institutional Grade.
- 5. Each through-bolted fasteners and threaded bass insert shall withstand direct pull force exceeding 1,500 pounds.
- 6. Emergency Access: Hinges and door latch shall allow door to be lifted over keeper from outside compartment on inswing doors.

B. Mounting Brackets:

- 1. Panels: 18-gauge (0.048 inches) stainless steel, full height of panel.
 - a. U-channels shall be furnished to secure panels to stiles.
 - b. Angle brackets shall be furnished to secure stiles to walls and panels to walls.
 - c. Fasteners at locations connecting panels-to-stiles shall utilize through bolted, stainless steel, pin-in-head Torx sex bolt fasteners.
- 2. Urinal Screen: 11 gauge (0.120 inches) stainless steel, full height of panel.

C. Hinges and Stops:

- 1. Hinges: Self-closing, 16-gauge (0.060 inch) continuous piano hinge.
 - a. Continuous piano hinge, self-closing gravity type, shall be attached to door and stile by theft-resistant, pin-in-head Torx stainless steel machine screws into factory-installed, threaded brass inserts. Fasteners secured directly into the core are not acceptable.
- 2. Stops: Two 11-gauge (0.120 inch) stainless steel door stop plates with attached rubber bumpers to resist door from being kicked in/out beyond stile.
- 3. Door stops and hinges shall be secured with stainless steel, pin-in-head Torx machine screws into threaded brass inserts.

D. Latch, Strike, and Keeper:

- 1. Stainless steel door latch shall slide into a stainless steel keeper.
 - a. Sliding door latch shall require less than 5-pound force to operate. Twisting latch operation is not acceptable.
 - b. Latch track shall be attached to door by machine screws into factory-installed threaded brass inserts.
- 2. Through bolted, stainless steel, pin-in-head Torx sex bolt fasteners shall be used at attach keeper-to-stile.
- 3. Mount latch at 42-inches above the finished floor in accessible stalls.
- 4. Track of door latch shall prevent inswing doors from swinging out beyond stile.

PLASTIC TOILET COMPARTMENTS SECTION 10 2113 21-1504

- 5. On outswing doors, door keeper shall prevents door from swinging in beyond stile.
- 6. Bumper: Extruded black vinyl.
- E. Locking: Door locked from inside by sliding door latch into keeper.
- F. Coat Hook and Bumper:
 - 1. Combination type.
 - 2. Equip outswing doors at accessible compartments with second door pull and door stop.
 - 3. Mount hook at 48-inches above the finished floor in center of door on the inside of the stall.

G. Door Pulls:

- 1. Provide door pull and wall stop for outswinging doors.
- 2. Equip doors to accessible stall with both inside and outside pulls.
- 3. Pulls shall be "U" shaped.
- H. Fasteners: As recommended by partition manufacturer and the following:
 - 1. Use stainless steel hardware to attach panel-to-stile brackets, coat hooks, and latch keepers.
 - 2. Exposed Bolts and Screws: Theft-resistant, one-way heads, stainless steel, ASTM A167; Type 304, pinhead Torx screws.

2.6 COLORS AND FINISHES

- A. Color of HDPE: match existing.
- B. Stainless Steel: No. 4 satin finish.
- C. Aluminum: Clear Anodized.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Prior to installation, carefully inspect and verify that the installed work of other trades is complete to the point where this installation may properly commence.
- B. Verify that toilet partitions may be installed in complete accordance with the original design. Verify solid blocking has been provided in walls and ceilings at all partition and bracing connection locations. Do not install if blocking is missing.
- C. In the event of discrepancy, immediately notify the Architect. Do not proceed in discrepant areas until discrepancies have been fully resolved.

3.2 INSTALLATION

A. General:

- 1. Install all toilet partitions and screens where indicated on the Drawings and reviewed shop drawings, anchoring into solid blocking in compliance with manufacturer's installation instructions.
- 2. Install partitions and screens rigid, straight, plumb and level.
- B. Provide clearances of not more than 3/8 inch between pilasters and panels, and not more than 1/2 inch between panels and walls and not more than 3/8 inch between vertical edge of doors and pilasters.
- C. Secure panels to walls with full length, continuous wall brackets using stainless steel fasteners spaced maximum 12 inches on-center.
- D. Stile shoes shall be anchored to floor with 1-1/2 inch, #14 stainless steel screws and metal anchors. Secure pilaster within shoe with theft resistant sex bolt.
- E. Attach panels and pilasters to continuous brackets with theft resistant sex bolts.
- F. Secure overhead brace to face sheets with not less than 2 fasteners per face.
- G. Set tops of doors to be parallel with top of pilasters and overhead brace when doors are in closed position.
- H. Urinal Screens: Provide floor to ceiling post and wall brackets.

3.3 ERECTION TOLERANCES

- A. Maximum Variation From True Position: 1/4 inch.
- B. Maximum Variation From Plumb: 1/8 inch.

3.4 ADJUSTING

- A. Make final adjustments to leveling devices.
- B. Adjust and lubricate hardware for proper operation after installation.
 - 1. Set hinges on in-swing doors to hold doors open approximately 30 degrees from closed position when unlatched.
 - 2. Set hinges on out-swing doors to return to fully closed position.
- C. Replace damaged parts, surfaces which are not free from imperfections. Field touch-up of scratches or damaged finish will not be permitted. Replace damaged or scratched materials with new materials.

PLASTIC TOILET COMPARTMENTS SECTION 10 2113 21-1504

3.5 CLEANING

- A. Upon completion, and as a condition of acceptance, visually inspect the entire work of this Section. Surfaces shall be free of imperfections, scratch marks, blemishes or color variations.
- B. Upon completion, thoroughly wash surfaces, remove foreign material, and polish surfaces.
- C. Leave entire work in neat, orderly, clean, acceptable condition as approved.

3.6 PROTECTION

- A. Protect work and materials of this Section prior to and during installation, and protect the installed work and materials of other trades.
- B. In the event of damage, make all repairs and replacements necessary to the approval of the Architect at no additional cost to the Owner.
- C. Adequately protect products during and after installation against damage of every nature. Exposed finishes shall be free from scratches, dents, permanent discolorations and other defects in workmanship or materials.

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\10 2113.10_plastic toilet compartments.docx Last Updated: March 30, 2021

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Toilet accessories.

1.2 RELATED REQUIREMENTS

- A. Section 10 2113, Plastic Toilet Compartments.
- B. Division 26, Electrical.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the state Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300. Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
- B. Coordination: Coordinate with other trades as required to ensure proper and adequate provision in framing and wall finish for the installation of the selected toilet accessories in the locations required including recessed items)

1.5 ACTION SUBMITTALS

A. Product Data: Submit list of each required accessory and complete descriptive data of products proposed for use. Include manufacturer's specifications, published warranty, installation instructions, and maintenance instructions.

1.6 INFORMATIONAL SUBMITTALS

A. Sample of manufacturer's warranty.

1.7 CLOSEOUT SUBMITTALS

- A. Warranty/Guarantee: Submit executed warranty and Subcontractor's guarantee.
- B. Maintenance data and operating instructions.

TOILET ACCESSORIES SECTION 10 2813 21-1504

1.8 QUALITY ASSURANCE

- A. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- B. Use materials and products of one manufacturer whenever possible.
- C. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

1.9 DELIVERY, STORAGE AND HANDLING

- A. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.
- B. Store materials in protected, dry conditions off of ground and in areas so as to not interfere with the progress of the Work.
- C. Transport, store and handle in strict accord with the manufacturer's written recommendations.

1.10 FIELD CONDITIONS

- A. Make and be responsible for field dimensions necessary for proper fitting and completion of Work. Report discrepancies to Architect before proceeding.
- B. Verify wall depths are adequate for each item prior to ordering. Notify Architect of conflicts or discrepancies.

1.11 WARRANTY

- A. Manufacturer: In addition to the Contractor's and Subcontractor's Guarantee, furnish Owner with manufacturer's fully executed written warranty for toilet accessories against defects in materials and workmanship, agreeing to replace and install toilet accessories at no additional cost to the Owner, within warranty period as follows:
 - 1. Grab bars: For a period of 3 years.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

A. Conform to applicable requirements of ADA and CBC for accessibility. When in conflict, conform to the most stringent.

2.2 MANUFACTURERS

A. Accessories: Bobrick Washroom Equipment Inc. or Bradley Corporation as specified and the basis of design, unless otherwise noted, or equal.

- Manufactured accessories not specified shall require approval as a substitution to be considered equal. Refer to substitution requirements specified in Section 01 3300, Submittal Procedures.
- 2. Although multiple manufacturers may be specified for a specific accessory, all accessories shall be the product of a single manufacturer, unless otherwise specified or approved.

2.3 MANUFACTURED UNITS

- A. Grab Bars: 18 gauge 1-1/2 inch outside diameter, type 304 stainless steel welded to 1/8 inch type 304 solid stainless steel wall plates; Bobrick Series B-6806, Bradley 812 Series, or equal.
 - 1. Configurations and Lengths: As shown.
 - 2. Grab bar shall withstand a 250 pound point load.
 - 3. Joints ground and polished.
 - 4. Finish on Exposed Surfaces: Satin.
 - 5. Fastening: Concealed, vandal resistant.

2.4 FASTENINGS

- A. Toilet accessories shall be complete with required fastenings.
- B. Fastenings shall either harmonize with the item being fastened, or be of the concealed type.
- C. Exposed fastenings shall be theft and vandal-resistant.

PART 3 - EXECUTION

3.1 **EXAMINATION**

- A. Prior to installation of the Work of this Section, carefully inspect and verify that the installed Work of other trades is complete to the point where this installation may properly commence.
- B. Verify that specified items may be installed in accordance with the approved design.
- C. In the event of discrepancy, immediately notify the Architect. Do not proceed in discrepant areas until discrepancies have been fully resolved.

3.2 PREPARATION

- A. The Contractor shall provide recesses, anchorage and back-up blocking in sizes and in locations as required for proper installation of accessories. Coordinate with other trades where necessary to make provisions for installation.
- B. Securely anchor items in place in locations and at mounting heights indicated. Where specific dimensions are not noted, installation shall be approved by the Architect.

TOILET ACCESSORIES SECTION 10 2813 21-1504

C. Securely fasten grab bar mounting plates to solid framing or blocking, in accordance with CBC.

3.3 INSTALLATION

- A. Grab bars: Solidly anchor grab bars to withstand minimum downward pull of 500 pounds between any 2 supports after installation.
- B. Sealants: Comply with requirements of Section 07 9200, Joint Sealants.

3.4 CLEANING AND ADJUSTING

- A. Upon completion of installation, remove manufacturer's temporary labels, marks of identification.
- B. Thoroughly wash surfaces, remove foreign materials, polish surfaces.
- C. Leave entire accessories in neat, orderly, clean, acceptable condition as approved.
- D. Replace damaged parts, surfaces which are not free from imperfections.

3.5 PROTECTION

- A. Protect Work and materials of this Section prior to and during installation, and protect the installed Work and materials of other trades.
- B. In the event of damage, make repairs and replacements necessary to the approval of the Architect at no additional cost to the Owner.
- C. Exposed finish shall be free from scratches, dents, permanent discolorations and other defects in workmanship or material.

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\10 2813_toilet accessories.docx Last Updated: April 1, 2021

PART 1 GENERAL

1.1 SCOPE

- A. Furnish and install all electrical systems as shown and specified, including wiring and connections to certain equipment furnished by others and any work not specifically noted but that can be reasonably inferred or is necessary to provide a complete functional system.
- B. There is no pre-bid equipment or materials for this project. Contractor shall order, furnish, and install all materials and equipment required for a complete and fully functional installation. All costs for material and installation shall be included in Contractors bid.
- C. Contractor shall guarantee installation, material and equipment for a period of one (1) year from date of final completion.
- D. It is mandatory for all bidders to attend the pre-bid walk.

1.2 RELATED WORK SPECIFIED ELSEWHERE

- A. Section 01 7329 Cutting and Patching
- B. Section 01 3516 Alteration Project Procedures
- C. Section 07 8400 Fire Stopping

1.3 PRODUCT HANDLING

- A. Contractor shall be responsible for delivery, storage, protection and placing of all equipment and materials.
- B. Protection: Contractor shall protect from damage during construction, work and materials of other trades as well as electrical work and material. Electrical equipment stored and installed on job site shall be protected from dust, water, or any other damage.

1.4 RULES AND REGULATIONS

- A. All work and materials shall be in full accordance with the latest rules and regulations of California Code of Regulation, Title 24 California Building Standards Code, National Electrical Code, Local City and County Code, applicable regulations of local utility companies, E.U.S.E.R.C. Standards, and General Order 95 of the Public Utilities Commission, and any other applicable laws or regulations.
- B. Nothing in these drawings or specifications is to be construed to permit work not conforming to the above codes.
- C. Drawings and/or specifications shall take precedence when work and material called for exceed code requirements.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

1.5 INSPECTIONS

A. Inspections required during construction shall be arranged by the Contractor. On completion of the work, furnish Engineer with certificates of inspection

1.6 DRAWINGS AND SPECIFICATIONS

- A. Information presented in the specifications and on the drawings are as exact as could be secured but their extreme accuracy is not guaranteed. The Drawings and Specifications are for the assistance and guidance of the Contractor, and exact locations, distances, levels, etc., will be governed by the site and building, and the Contractor shall accept same with this understanding.
- B. The drawings indicate schematically the layouts of equipment, accessories and wiring systems and shall be followed as closely as possible. Other drawings and actual field conditions shall be examined, noting all conditions that may affect this work. Report conflicting conditions to the Engineer for adjustment before proceeding with work.
- C. Minor changes may be made, providing change is ordered before equipment and wiring systems or work directly connected to same is installed and no extra materials are required.
- D. Where conflicts between the written specifications and the drawings occur the more stringent requirement shall apply.

1.7 STRUCTURAL REQUIREMENTS

A. Installation under this section shall comply with the California Building Code. Obtain the Structural Engineer's approval before performing any cutting or patching of concrete, masonry, or wood structure in the building.

1.8 EXAMINATION OF SITE

A. The Contractor shall be held to have visited the site, checked existing conditions, and satisfied himself as to the conditions under which the work is to be performed before submitting his bid. No allowances shall be made in his behalf for any extra expense to which he may be put due to failure or neglect to discover conditions affecting his work.

1.9 MATERIAL AND EQUIPMENT

- A. Unless otherwise noted, all material and equipment shall be new, of the type, capacity and quality specified and free from defects. Material shall bear the label of, or be listed by the Underwriters' Laboratories unless of a type for which label or listing service is not provided.
- B. Materials shall be of the same brand or manufacture throughout for each class of material or equipment wherever possible.

1.10 MATERIAL SUBSTITUTIONS

- A. Specific brand names mentioned shall establish standards of performance and quality and the phrase "or approved equal" shall be implied unless otherwise noted.
- B. Substitute materials shall be equal in all respects including quality, arrangement, physical size, capacity, performance, and utility to those specified. Approval of substitute material shall be

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

regarded as general only and shall not relieve the Contractor from complying with the requirements of the Drawings and Specifications; the Contractor shall be responsible, at his own expense, for any damage caused by proposed substitutions, which affect other parts of his own work or the work of other contractors.

- C. Only one proposed substitution will be considered for each item. No consideration will be given to substitutions past 10 day limit. Should the original submittal of a proposed substitution be rejected, the specified item shall be furnished.
- D. The submittal of a proposed substitution shall clearly establish the following:
 - 1. The item can be transported into and installed in the intended space and in the manner shown.
 - 2. Required connections (electrical, conduit, and other) can be properly made and adjoining work can be properly accomplished.
 - 3. The proposed substitute is similar to and of substance equal to that specified, is suited to the same use as that specified, and will perform the functions required by design.
- E. By submitting a proposed substitution, the Contractor agrees to the following:
 - 1. He will assume full responsibility for any and all modifications necessary alterations arising from the use of the substitute item or material including all cost incurred by all other trades.
 - 2. He will assume full responsibility for any delay in the construction schedule resulting from the use of the substitution.
 - 3. He will prove harmless and indemnify the Owner and the Owner's design consultants from real or alleged damages that may result from the installation, use, or performance of a substitute material product.
- F. The following conditions apply to substitutions:
 - 1. Submittals of substitutions are not and do not become part of the contract documents.
 - 2. Contractor shall not order, fabricate, use, or install any substitute product or procedure unless he has received acceptance of the substitution from the Engineer.
 - 3. Should the Contractor install any substitute product in violation of the above he shall remove it and install the specified product at his own expense.
 - 4. The Contractor shall provide a letter stating that all the above items shall apply to all substituted products and equipment.
 - 5. Any submittal for substituted equipment or product that does not clearly show that the substituted item is equal shall be rejected and no further submittal shall be allowed on the substituted item. Provide in submittal format documentation that the proposed item is exactly as specified in the contract documents.

1.11 SHOP DRAWINGS AND SUBMITTALS

A. General

Within 15 calendar days after award of the Contract, and before fabrication and installation of any material, submit for approval six copies of complete submittal data containing complete information and catalog cuts, shop drawings, and other data on all materials, systems and equipment, including equipment which is to be furnished as specified. The submittal data shall be complete for the project and submitted at one time.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

- 2. Submit only one manufacturer for each item or product included in the submittal package; Product intended for use on this project shall be highlighted or otherwise uniquely identified.
- 3. If catalog cuts are submitted which also include products on the same page that are not allowed on this project, that product shall be crossed out or otherwise acknowledged as not being permitted on this project.
- 4. Individual groups of submittal types must include a cover sheet with table of contents, identifying each item by the name or symbol used in the construction documents, if applicable; the manufacturer; and complete catalog number. Any item which is a substitute being submitted for consideration, shall be clearly marked as a substitute.
- 5. All submittals shall be checked by the Contractor for conformance to the requirements of the Construction Documents before forwarding for approval. Contractor shall be responsible for all quantities and errors and omissions of submittals. Submittals for materials shall be accompanied with samples when requested.
- 6. Partial or incomplete submittals may be rejected as not complying with requirements; the Contractor shall be liable for any resultant consequences.
- 7. Delayed submittals may be rejected as not complying with requirements. Whether accepted or rejected, delayed submittals will not be considered justification for extension of contract time or similar relief.
- 8. Submittals not required or permitted by the specifications but made at the option of the Contractor, will be returned without review unless accompanied with written valid justification.
- 9. Submittal items improperly included with those of another category (such as a proposed substitution included with shop drawing submittal) are not valid and will be returned without review.
- 10. Acceptance of a submittal does not relieve the Contractor of responsibility for omissions from the submittal or errors in the submittal.

B. Review

- 1. Submittals will be reviewed for general acceptability, not necessarily including all details. The engineer's review is for general conformance with the design concept of the project and the information given in the contract documents. The contractor is solely responsible for confirming and correlating all quantities and dimensions; selecting fabrication processes and techniques of construction; coordinating the work with that of other trades and performing all work in a safe and satisfactory manner. Corrections of comments made on this submittal during this review do not relieve contractor from compliance with the requirements of the contract documents or with its responsibilities listed herein.
 - a. Proposed substitutes will be judged not only for acceptability of the items themselves, but also how they will be used under the conditions of the particular project.
 - b. Proposed substitutions will be judged also for compliance with qualifications and conditions stipulated herein.
- 2. Each Reviewed submittal will be marked to indicate review and direction
 - a. Acceptance of a substitute does not waive the specified requirements.
 - b. Once a substitution is accepted, no revision or resubmittal may be made except for pressing and valid reason and after receipt of approval to do so.

1.12 WORKMANSHIP

A. Good workmanship shall be evidenced in the installation of all electrical materials and equipment. Equipment shall be level, plumb and true with the structure and other equipment. All materials shall be firmly secured in place and adequately supported and permanent. The requirements of the codes are minimum standards. The recommendations of the National Electrical Contractors Association Standard of Installation shall be followed except where otherwise specifically directed.

1.13 CLEANING

A. After all other work such as patching, painting, etc., has been accomplished, lighting fixtures, panelboards, switchboards, and all other electrical equipment shall be cleaned of all dirt, grease, plaster, paint or other marks.

1.14 ELECTRICAL WORK FOR EQUIPMENT PROVIDED BY OTHERS

- A. Provide all necessary electrical connections to all equipment provided by others. Obtain specific power and control wiring requirements and connection points from others to perform electrical work. Contractor shall assist in testing equipment but responsibility is limited to correctly installing electrical wiring and connections.
- B. All control wiring for mechanical equipment, both line and low voltage, shall be provided in the mechanical work. All disconnect switches and motor starters shall be provided by this contractor.

1.15 MANUFACTURER'S DIRECTIONS

A. Follow manufacturer's directions where these directions cover points not included on the Drawings or in the Specifications.

1.16 MISCELLANEOUS EQUIPMENT

A. This Contractor shall provide all conduit, conductors, disconnects, and connections for power and controls for equipment requiring electrical services.

1.17 MANUALS

- A. In addition to the catalog data and shop drawing submitted for review as required hereinbefore, the Contractor shall furnish to the Engineer three (3) hard copies and two (2) electronic copies on a flash drive with the final corrected sets of all data applicable to the equipment furnished.
 - 1. Each set of data per system shall be bound in one or more volumes. A top quality three-ring binder with vinyl or hard cover will be acceptable in lieu of binding; however, all insert data must be properly punched and reinforced.
 - 2. Identification information shall include the building name, address and location, system or systems included and titled "Maintenance Manual".
 - 3. All data shall be assembled in an orderly sequence with tabbed dividers to correspond with the table of contents.
 - 4. Manufacturer's catalog data, shop drawings, etc., shall be marked clearly to identify the items applicable only to this project.
 - 5. Make and model numbers of each items installed shall be marked clearly in catalog data and identified with symbols used on the Drawings. Complete data shall be provided on all

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

major items to include: panelboards, switchboards, transformers, lighting fixtures, starters, transfer switches, and fire and security alarm system.

6. Submit copy to Engineer for review before delivery to Owner.

1.18 GUARANTEE

A. Guarantee all electrical work and equipment to be free from defects in workmanship and material for a period of one (1) year from date of final completion. Promptly replace or repair such defects and any damage to property done during repair work at no expense to the Owner. Any warranties, or certificates available for equipment installed, shall be filed at date of acceptance and delivered to Engineer.

1.19 RECORD DRAWINGS

A. The Contractor shall furnish one set of clean "record" marked black line prints and an electronic copy in AutoCAD to the Engineer at completion showing clearly any changes made during construction. Clearly indicate electrical equipment and feeder pull box locations and switchgear, distribution panel and panelboard feeder conduit routing.

PART 2 PRODUCTS

2.1 MATERIALS

- A. Unless otherwise noted, all material and equipment shall be new, of the type, capacity and quality specified and free from defects. Material shall bear the label of, or be listed by, the Underwriters' Laboratories unless of a type for which label or listing service is not provided.
- B. Unless specified otherwise, all materials and equipment shall be manufactured and assembled in the United States of America. Materials shall be of the same brand or manufacture throughout for each class of material or equipment wherever possible.
- C. Equipment shall be the product of a manufacturer who has, for a period of not less than five (5) years, been in successful manufacture of the equipment and who has a nationally distributed catalog covering ratings and specifications of said equipment.
- D. Unless specified otherwise, exterior conduits 1 inch or smaller shall be rigid metal. All conduits on flat roofs or under covered walks shall be rigid metal. Strut straps are the preferred method of strapping.

2.2 RACEWAY

- A. Exposed runs shall be neatly installed parallel or at right angles to the structural members.
- B. Pull Wires: Provide #12 in empty conduits 1" and smaller and 3/16" polypropylene rope in conduits 1-1/4" and larger.
- C. Cap Conduits: Keep conduits capped until wires are pulled. Use manufacturer plugs and caps, push-penny plugs of flexible plastic or steel pennies under bushings.
- D. Conduit Penetrations: Provide seamless lead flashing where conduits penetrate the roof, consisting of lead flashing and cast iron counter-flashing. Flashing shall be Semco 1100 Series,

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

Stoneman or equal. Where conduits pass through finished walls, provide steel escutcheon plates, chrome or painted as directed. Conduits which penetrate ceiling or floor slabs and concrete or masonry walls shall be grouted and sealed watertight at penetration.

- E. Conduit Straps: Two-hole steel snap-on type with ribbed back or malleable iron with galvanized or cadmium plated finish. Secure straps with wood screws on wood material, metal screws or machine screws and bolts on metal material, toggle bolts on hollow masonry and expansion shields with machine screws on concrete or solid masonry. Use of nail straps or perforated strap iron is prohibited.
 - 1. One-hole straps are required on masonry/concrete walls.
- F. Conduit Supports: Support individual runs with split ring hangers and threaded rods and multiple runs with split conduit clamp and slotted steel channel, super strut, Unistrut or equal. Conduit shall be supported independently of one another and suspended ceiling system.
- G. Slotted steel channel (strut) shall be installed with end caps.
- H. Threaded rods shall be terminated with a double nut and the rod trimmed flush with the last nut.
- I. Conduit sizes shown on Drawings are minimum.
- J. Underground Conduit Stub Marker: Mark location of all underground conduit stubs. Provide capped conduit stake at end of stub with non-corrosive tag identifying source of stub. Set stake flush with final grade after Owner has been shown location. Extend all conduit stubs a minimum of 5"-0" beyond concrete footings, curbs or sidewalks, etc. Provide exact dimensions on record drawings for all stub locations. Cap ends of stubs.

2.3 RIGID STEEL CONDUIT

- A. Standard weight, mild steel pipe, heavy wall, with threaded fittings, zinc coated on both inside and outside by a hot dipping or sherardizing process. Conduit fittings finished to same requirements as for rigid steel conduit. All couplings, unions and fittings threaded type. Compression type fittings are not acceptable.
- B. Apply thread sealant to all joints except in permanently dry locations. Where installed below floor slab and in contact with fill material, or underground and in contact with earth or encased in concrete shall be double wrapped with Scotchwrap #50, Johns-Manville VID-10 or equal at double 1/2 lap (four net layers). Follow any specific instructions or methods shown on Drawings.
- C. Termination of conduits, wiring gutters or boxes shall be fitted with steel locknut and insulated metallic bushing or with two steel locknuts and insulating bushings. When grounding bushings are required, use insulated grounding bushing. Where conduit connections are exposed to weather or excessive moisture they shall be fitted with insulated watertight sealing hub i.e. Myers Hub.
- D. Cap underground conduit stubs.
- E. All cut ends of conduit shall be reamed to remove rough edges where conduit is threaded in the field; an electrical conduit thread cutting die with a taper shall be used.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

2.4 ELECTRIC METALLIC TUBING (EMT)

- A. Shall be galvanized steel, thin wall. Maximum trade size to be used shall be 4". May not be used underground, under floor, exposed to weather, in concrete, or in any location subject to physical damage.
- B. Connectors and couplings shall be steel rain-tight compression type requiring the tightening of a nut for trade sizes ¾-inch and smaller and set screw type for 1-inch and greater, all with insulated throat.

2.5 FLEXIBLE STEEL CONDUIT

- A. Shall be galvanized steel with minimum trade size of 1/2". In wet and corrosive locations, outside, or motor connections, shall be liquid- tight. May be used to connect recessed lighting fixtures or mechanical controls and equipment. Length shall be kept to a minimum but to allow for movement or removal of equipment. Leave slack in flex connection to maintain flexibility of conduit, minimum of 3' of flex & one (1) 90° bend.
- B. Connectors shall be tite-bite type with insulated throat Crouse-Hinds Series ACB or T & B Series 3110; connectors for liquid-tight shall be with insulated throat Crouse-Hinds Series LTC or T & B Series 5331 with sealing "O"- ring at outside of enclosure.

2.6 INTERMEDIATE METAL CONDUIT

- A. Lightweight rigid steel conduit, light wall, with threaded fittings. Conduit shall be zinc coated on both inside and outside by hot dipping or sherardizing process, use only threaded connections, coupling or fittings.
- B. Threaded conduit shall be interchangeable with standard rigid steel conduit fittings. Fitting shall be finished to same requirements as conduit. Bends and offsets less than 45 degrees permitted with the use of standard bending equipment. Bends and offsets 45 degrees and larger shall be provided with standard steel fitting and elbows.
- C. May not be used underground, under floor, in concrete slabs, in concrete walls, or in any hazardous locations.
- D. The number of conductors in a single conduit shall not exceed that permitted by the percentage fill specified in Table 1, Chapter 9, using the conduit dimensions of Table 4, Chapter 9, of the National Electrical Code.
- E. All cut ends of conduit shall be reamed to remove rough edges where conduit is threaded in the field; an electrical conduit thread cutting die with a taper shall be used.
- F. Termination of conduits in cabinets, wiring gutters or boxes shall be as called for under rigid steel conduit above.

2.7 PLASTIC CONDUIT PVC (Polyvinyl Chloride), Schedule 40, Heavy Wall, UL Listed and Labeled for Direct Burial, 90 Degrees Centigrade

A. Conform to NEMA TC-2.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

- B. Shall be classified for direct burial, may be used underground with sand fill evenly compacted on all sides or in concrete floor, or concrete walls, limited to structural requirements. All portions shall be concealed below grade or within concrete slab.
- C. Minimum trade size shall be 3/4" with minimum 30" cover over conduit.
- D. Continuation of run above grade, above floor slab into building and all bends, elbows, and risers shall be with PVC coated rigid steel conduit. Bends, elbows and risers in conduits 1" and smaller concealed underground, or in concrete floor slabs may be PVC Schedule 40.
- E. Continuation of run above floor slab shall be with rigid steel, intermediate metal grade, or EMT in furred walls.
- F. A copper bonding conductor shall be pulled in each raceway and bonded to equipment at each end with code lugs.
- G. Duct separation shall be provided using plastic conduit spacers specifically designed for the purpose.
- H. All joints shall be solvent cemented in accordance with manufacturer's recommendations.
- In conduit 1" and smaller, standard PVC manufactured 30 degree, 45 degree and 90 degree elbows shall be used. Where bends and offsets other than the standard fittings must be used, they shall be made with the use of standard manufactured bending equipment. Any burn marks on any PVC conduit will be considered cause for rejection of entire PVC conduit installation, until the complete installation is physically inspected at Contractor's expense. Where excavation or removal of wall covering, etc., is required for inspection, Contractor shall remove and reinstall at his sole expense.

2.8 CONDUCTORS

- A. All conductors shall be in raceways. Minimum size shall be #12 AWG except for control circuits, which may be #14 AWG minimum. Signal and control circuits other than mechanical shall be as indicated on Drawings or as required by equipment manufacturers.
- B. Color code all branch circuits and feeders as follows:

	120/208 Volts	<u>120/240 Volts, 1Ф</u>	<u>120/240 Volts, 3Ф</u>	277/480 Volts
Phase A	Black	Black	Black	Brown
Phase B	Red	Red	Orange*	Orange
Phase C	Blue		Blue	Yellow
Neutral	White	White	White	Gray
Ground	Green	Green	Green	Green

^{*} Marking shall comply with NEC 384-3, 215-8 & 230-56 to identify the "Stinger Leg" and its placement (Phase B) for Red Leg Delta system.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

- C. Control conductors may be black or color other than shown above.
- D. Conductors in sizes up through #8 AWG shall have solid color finish as listed above. #6 AWG and larger shall be color coded by either solid color finish or application of phase tape for minimum of 6" length on conductor. Coding shall occur at all terminations, pull boxes and splices.
- E. Color-coding shall be continuous and consistent throughout the work. Do not use different colors for switch legs, fixture taps, travelers, etc.
- F. Phasing: Terminals in panelboards, motor control centers, switchboards and other equipment shall be phased A, B, C, reading left to right or top to bottom looking into the front of the equipment.
- G. Circuit Identification: Each branch circuit, control and signal conductor shall be labeled with the circuit number or terminal number it is connected to. Use sleeve (tube) type markers. Conductors shall be labeled at each panelboard, switchboard, control center, terminal cabinet, pull box, and at each point of utilization such as fixtures, motors, speakers, etc. Labeling shall correspond to control diagrams where applicable.
- H. All insulation shall be 600V minimum except for low voltage fire alarm wiring. Fixture tap and branch circuit wiring within fixture wireways shall be Type THHN 90 degree C. Control wiring #14 and smaller shall be Type THHN/THWN or TFF Stranded. Insulation for bonding and grounding conductors shall be Type THWN except as noted on Drawings.
- I. All conductors, unless otherwise noted, shall be Type THHN/THWN. RHW-2 shall be used where shown. XHHW-2 shall be used in feeders run on the exterior of buildings or roof tops where exposure to direct sunlight occurs and between the output of a VFD and the motor served.
- J. Conductors #10 AWG and smaller shall be copper, 98% conductivity, stranded or solid, except for control conductors which shall be stranded. Conductors #8 AWG and larger shall be stranded copper, 98% conductivity.
- K. Splices: For conductors #10 and smaller, pre-insulated type connectors, 3M Scotchloks, T & B Piggys or equal, nylon self-insulated type. Splices #8 and larger use compression type connector, Burndy type YS long barrel, requiring the use of a 360 degree circumference compression type tool, then insulated with Scotchtape No. 88 or equal. Use Scotchfill or equal around large or irregular shape splices for insulation build-up and Scotchtape No. 88. Wire splicing devices shall be sized according to manufacturer's recommendations.
- L. Splices in underground pull boxes or in other areas subject to moisture shall be provided with cast resin kits and cadweld or compression type connections, Burndy type YS long barrel. Use Scotchlok sealing packs for wire size to #10 and Scotchcast kits for larger splices as recommended by 3M Company. All splices to be prepared as hereinbefore specified before resin kits are applied. Wire splicing devices shall be sized according to manufacturer's recommendations.
- M. Cable Ties: For wire training and clamping in cabinets and enclosures use nylon cable ties.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

- N. Wire Pulling Lubricant: Poly-water-J, or other UL approved lubricant.
 - 1. Approved lubricant characteristics will have no flash point, will not be flammable and have an NFPA hazard rating of 0 for health, fire and reactivity.
 - 2. Comply with OSHA Regulation 29 CFR 1910.1200.
 - 3. Flax soap is not approved and is not permitted on job.
- O. Swab conduits before installing cables, and exercise care in pulling to avoid damage or disarrangement of conductors, use approved grips.
- P. Terminating of #8 and larger conductors shall require the use of two (2) hole pad, long barrel copper compression terminals. A 360 degree circumference compression type tool shall be used.
- Q. Cable Identification: Non-ferrous identifying tags or pressure sensitive labels shall be securely fastened to all cables, feeders and power circuits in pull boxes. Tags or labels shall be stamped or printed to correspond with markings on drawings or marked so that feeder or cable may be readily identified.

2.9 BOXES

- A. Shall be of size and shape best suited for particular application, properly code sized for number of wires and conduits passing through or terminating therein, but in no case less than four inches square or octagon. Support boxes directly to structural members, framing or blocking by means of screws, anchors, bolts or embedded in masonry or concrete.
- B. Outlet boxes shall be one-piece pressed steel, sherardized or galvanized. Boxes shall be fitted with flush device covers and "Plaster Rings", or tile rings in masonry or concrete. Surface covers shall be used where exposed wiring is permissible. Lighting outlets shall be fitted with 3/8" malleable fixture stud. Boxes in damp or outdoor locations shall be malleable iron with threaded hubs, fitted with gasket and cast cover.
- C. Pull Boxes: Indoor pull boxes fabricated of code gauge steel, of size shown or as required, complete with screw covers, flush type in finished areas, surface type in unfinished areas, primed, and painted. See drawings for additional requirements.
- D. Pull boxes used outdoors or in damp locations fabricated of code gauge steel with rain-tight welded seams, conduit hubs on top or sides, screw covers with neoprene or korprene gaskets. Hardware non-ferrous metal or hot-dipped galvanized. Boxes located on roof, entire boxes painted two coats of rust-inhibiting aluminum paint, "Rustoleum" or equal. Boxes located on building walls or free standing; finish power paint color to match exterior building color. Building with new portable generator tap boxes, color to match building exterior finish.

2.10 FINISH MATERIAL

- A. Plates: Shall be nylon for flush wall devices, weatherproof series for damp and outdoor locations and zinc-plated steel for surface installation.
- B. Outdoor receptacle installations shall be equipped with In-use, lockable, metallic covers.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

C. GFCI Receptacles: Rated 20 amperes at 125 volts, double sided contact, back side wired, Ivory color.

<u>Manufacturer</u> <u>Duplex 3-Wire Grounding</u>

Pass & Seymour 2097

Cooper 2097

Leviton GFNT2

D. Refer to drawings for special outlets.

2.11 FIRESTOPPING

A. Fire stopping shall be: As manufactured by Hilti Construction Chemicals, Inc. or Equal

2.12 PANELBOARDS

- A. Arrangement as indicated on Drawings is based on existing panelboards. Panel class, size, breaker ratings, etc. shall be as shown on Drawings.
- B. Multiple pole circuit breakers shall have internal common trip connections. All breakers shall be bolt-on to the bus type, with a minimum symmetrical amp rating of 22,000 RMS unless noted otherwise in the drawings. All breakers shall be listed for termination of copper, insulated at 75oC temperature rating or higher. All breaker lugs shall be copper. Breakers shall be fully rated for the symmetrical amp rating listed unless specified otherwise.
- C. Panel schedules shall be updated with one that is type written. Provide a plastic cover for the new schedule.
- D. Conduits shall enter cabinet through neat hole and perpendicular to entrance face.

PART 3 EXECUTION

3.1 COOPERATION

A. Coordinate work with that of all contractors and vendors on the job for an efficient and effective completion of the project. Refer to the contract documents of other trades for construction details.

3.2 WORKING SPACE

A. Adequate working space shall be provided around electrical equipment in strict compliance with the Electrical Safety Orders. In general provide six and one-half feet (6'-6") of headroom and thirty-six inches (36") minimum clear workspace in front of panelboards and controls for 120/208 volt equipment, and forty two inches (42") for 277/480 volt equipment.

3.3 FLASHING AND SEALING

A. Flash and counter-flash roof and wall penetrations with lead flashing and cast iron counterflashing as approved by the Engineer. Conduits, ducts, etc., passing through finished walls shall

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

be fitted with steel escutcheon plates, chrome or paint finish as directed. Conduits, which penetrate, floor slabs and concrete or masonry walls shall be grouted and sealed watertight at penetration.

3.4 FIRESTOPPING AND FIRE RATED PENETRATION

A. Maintain fire rating of all fire rated walls, ceilings, floors, roof, etc. Use UL listed Hilti Construction Chemicals, Inc product, suitable for the application. Installation shall also maintain watertight integrity through all penetrations where water may be present. Install in accordance with manufacturer's recommendations and within UL Listing installation requirements.

3.5 EXCAVATION AND BACKFILL

- A. Perform excavation and backfill required for electrical installation. Restore all surfaces, roadways, walks, curbs, walls, existing underground installations to original condition in an acceptable manner.
- B. Install utility locator tape in all trenches.
 - For all trenches, provide a 6-inch-wide non-biodegradable metal-detectable polyethylene tape at 12 inches below grade, 5-mil thick, labeled "CAUTION ELECTRIC LINE BURIED BELOW". Fluorescent red for electric power conduits and fluorescent orange "TELECOMMUNICATIONS" for telephone and signal conduits. Use Fluorescent red for common trenches. Tape shall be continuous for full length of trench.
- E. Excavation: Dig trenches straight and true to line and grade with bottom smooth of any rock points. Support conduit for entire length of undisturbed original finished or natural grade (unless noted otherwise).
 - 1. Backfill: Backfill shall be tamped in six inch (6") layers, with rock free sand to 6" cover above the conduit then Class #2 Road Base to finish grade as directed by settlement. Backfill under floor slabs on grade shall conform to applicable requirements of other sections of the Specifications.

3.6 EQUIPMENT IDENTIFICATION

- A. Nameplates shall be installed on electrical equipment, including switchboards, switchboard circuit breakers, panelboards, disconnect switches, time switches, contactors, motor starters, pullboxes, cable tap boxes, etc., and wall switches for lighting or other devices where the control function is not self-evident.
- B. Nameplate shall adequately describe the item and its function, or use of the particular equipment involved including:
 - 1. Power source immediately upstream indicating panel and circuit number(s).
 - 2. Rating of the serving feeder
- C. Nameplate material shall be laminated phenolic plastic, black front and back with white core, engraved and fastened with cadmium plated steel self-tapping screws, or brass bolts.
- D. Installed switchboards shall include a label noting "Installed By:", the name of the installing Electrical Contractor, Telephone Number, and the Date of installation.
- E. All receptacles shall be identified per source panel and circuit number.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

F. Coordinate with the local power utility to obtain the available short circuit current for the electrical service. Provide a phenolic label at the main switchboard noting the available short circuit current and the date the information was obtained.

3.7 EQUIPMENT FINISH AND PAINTING

- A. All electrical equipment, including switchboards, switchboard circuit breakers, panelboards, disconnect switches, time switches, contactors, motor starters, pullboxes, cable tap boxes, etc. located in finished areas shall be painted out to match adjacent finish. Coordinate with Architect to confirm color prior to painting.
 - 1. Refer to section 09 9000 Painting and Coating for requirements.

3.8 GROUNDING AND BONDING

- A. Provide grounding and bonding for all electrical equipment in accordance with the applicable codes, rules and regulations. Permanently and effectively ground all raceway systems, supports, cabinets, panels, motor frames, lighting fixtures, grounding type receptacles and utilization apparatus. Obtain good contact between conduit, tubing and fittings, cabinets, outlet boxes, and equipment.
- B. Provide bonding conductor in all branch circuit and feeder conduits. Bonding conductors shall be properly bonded to equipment at each end.
- C. Provide a master ground bar on the wall in the main electrical room unless noted otherwise in the drawings.
 - 1. Code size conductor bond to the building service ground systems per CEC Table 250.66.
- D. Provide copper ground bar in each MDF and IDF internet technology rooms complete with standoffs.
 - 1. Conductor bond to the main building service ground or master ground bar size conductor per BICSI standards for distance.
- E. Ground rods, where used, shall not be less than 5/8 inch in diameter and 10 feet long. They shall be driven to within 4 inches of full length into the earth. Bonding to the rod(s) shall be with Burndy, Cad-Weld, or Ampact connectors.

3.9 EQUIPMENT MOUNTING AND SUPPORTS

- A. Equipment, straps, boxes, etc., when anchored to masonry and concrete surfaces, shall be anchored with wedge type anchors, Hilti Kwik Bolt KB-TZ2.
- B. Runs of conduit, raceway, and wireway shall be supported at intervals not to exceed five (5) feet on center.
- C. Anchors shall be torque tested to the values specified in the drawing details. Structural details and torque values take precedence over those listed in the electrical drawings.
- D. Conduit placed against concrete or masonry above ground shall be fastened to the concrete with pipe straps or one-screw conduit clamps attached to the concrete by means of expansion anchors and screws.

- E. Hanger straps, rods, or pipe supports under concrete shall be attached to inserts set at the time the concrete is poured. Under wood use bolts, lag bolts, or lag screws; under steel joists or trusses use beam clamps.
- F. Conduit shall be supported at intervals not exceeding 10 feet and in all cases with support not more than 3 feet from the outlet and at any point where it changes in direction. Perforated strap and plumber's-tape shall not be used in the support of conduits.

FIELD QUALITY CONTROL

- A. Test all wiring and connections for continuity and grounds before any fixtures or equipment are connected and where such tests indicate faulty insulation or other defects, they shall be located, repaired and tested again at the Contractor's expense. Electrical loads shall be balanced at the panelboards and motors shall be checked for correct rotation.
- B. After the installation is completed and at such time as Project Coordinator may direct, conduct an operating test for approval in accordance with NETA Standards. Demonstrate equipment to be in conformance with applicable Codes and operate in accordance with Requirements of this Section of the Specifications. Furnish all instruments and personnel required for test.
 - 1. Make type written record of all readings and submit this record to Engineer. Replace circuits found to be below the minimum values of insulation resistance for the types of conductors as recommended by International Electrical Testing Association, (ATS) Acceptance Testing Specification 2013 or newer, for new equipment, and (MTS) Maintenance Testing Specifications 2015 or newer where portions of existing equipment will be subjected to testing voltages. Retest new cable and record.
- C. Contractor will contract with an electrical testing company to perform the following applicable tests and submit test reports for the equipment specified in the drawings unless noted otherwise:

3.10 INSULATION RESISTANCE TEST SPECIFICATIONS – Cables – Low voltage to 600 volts maximum.

- A. Visual and Mechanical Inspection
 - 1. Inspect cables for physical damage and proper connection in accordance with single line diagram.
 - 2. Test cable mechanical connections to manufacturer's recommended values with a calibrated torque wrench. In absence of manufacturer's data use Table 1.
 - 3. Check cable color-coding with applicable engineer's specifications and National Electrical Code standards.

B. Electrical Tests

- 1. Perform insulation resistance test on each conductor including neutral with respect to ground and adjacent conductors before connecting to equipment. Applied potential to be 1000 volts dc for one (1) minute withstand test, per NETA ATS-2013.
- 2. Perform continuity test on all power equipment branch and feeder circuit conductors. Verify proper cable connection and phasing.

C. Test Values

1. Minimum insulation resistance values shall be not less than 50 megohms.

ELECTRICAL BASIC MATERIALS AND METHODS SECTION 26 0510 21-1504

3.11 CONDUCTOR SPLICING

A. Visual Inspection

- 1. Inspect cables for physical damage and proper connection in accordance with single line diagram. Inspect conductor strands for scarring. Any scarring shall require the cutting of the cable/conductor end to remove the damaged strands.
- 2. Splices shall be tested in accordance with NETA 7.3.2.3 TEST VALUES, paragraph 3 "Microhm or millivolt drop values shall not exceed the high levels of the normal range as indicated in the manufacturer's published data. If the manufacturer's data is not available, investigate any values which deviate from similar connections by more than 50 percent of the lowest value.
 - a.) In other words; test all of the splices and compare the values. Splices with test values that exceed 50 percent of the lowest value obtained shall be removed and the conductors re-spliced.
- 3. After the testing of the splice is complete and the application of the shrink insulation perform an "insulation-resistance test on each conductor with respect to ground and adjacent conductors" with an applied potential of 1000 volts per NETA 7.3.2.2 Electrical Tests and specification 26 00 00, section 3.
 - a.) Per NETA 7.3.2.3.4 "minimum insulation-resistance values should not be less than 50 megohms.

Table 1

U.S. Standard

Bolt Torques for Bus Connections

Heat Treated Steel - Cadmium or Zinc Plated

_	Tieat Tiea	aled Steel - Cadmid	ill of Zille i lated		
GRADE	SAE	SAE	SAE	SAE	
	1 & 2	5	6	8	
Minimum					
Tensile (P.S.I.)	64K	105K	133K	150K	
Bolt Diameter		Torque (Foot Pounds)			
1/4	4.0	5.6	8.0	8.4	
5/16	7.2	11.2	15.2	17.6	
3/8	12.0	20.0	27.2	29.6	
7/16	19.2	32.0	44.0	48.0	
1/2	29.6	48.0	68.0	73.6	
9/16	42.4	70.4	96.0	105.6	
5/8	59.2	96.0	133.6	144.0	
3/4	96.0	160.0	224.0	236.8	
7/8	152.0	241.6	352.0	378.4	
1.	225.6	372.8	528.0	571.2	

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

A. Section Includes:

- 1. Engineered fill materials.
- 2. Imported engineered fill material.
- 3. Landscape backfill material'
- 4. Aggregate base.

1.2 RELATED REQUIREMENTS

- A. Document 01 5000, Temporary Facilities and Controls.
- B. Section 01 5713, Erosion Control.
- C. Section 31 2333, Trenching and Backfilling.
- D. Section 32 1200, Asphalt Concrete Paving.
- E. Section 32 1600, Site Concrete.
- F. Section 33 4000, Storm Drainage Utilities.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. Local Jurisdiction: Any work within the street, highway or right-of-way shall be performed in accordance with the requirement of the governmental agencies having jurisdiction, and shall not begin until all of those governing authorities have been notified.

D. ASTM International (ASTM):

- 1. D698-00 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.
- 2. D1556-00 Test Method for Density of Soil in Place by the Sand-Cone Method.
- 3. D1557-02e2 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures Using 10 lb. (4.54 Kg) Rammer and 18 inch (457 mm) Drop.
- 4. D3017-05 Test Methods for Moisture Content of Soils and Soil-Aggregate Mixture by Nuclear Methods (Shallow Depth).

EARTHWORK SECTION 31 0000 21-1504

- 5. D422-63(2007) e1 Test Method for Particle Size Analysis of Soil.
- 6. D4318-05 Test Method for Liquid Limit, Plastic Limit, and Plasticity Limit.
- E. CALTRANS Standard Specifications Section 17.
- F. CAL-OSHA, Title 8, Section 1590 (e).
- G. Site survey: Included in the drawings, was prepared by Warren Consulting Engineers, and is the basis for data regarding current conditions. While the survey is deemed generally accurate, there exists discrepancies and variations due to elapsed time, weather, etc. Existing dirt grades may vary 0.2 ft. from that shown.

1.4 ADMINISTRATION REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
- B. Site Visitation: All bidders interfacing with existing conditions shall visit the site prior to bid to verify general conditions of improvements. Discrepancies must be reported prior to the bid for clarification.

1.5 ACTION SUBMITTALS

A. Provide supplier's descriptive literature for all products to demonstrate compliance with specified attributes.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For Contractor / Installer.

1.7 CLOSEOUT SUBMITTALS

A. Guarantee: Submit subcontractor's guarantee.

1.8 QUALITY ASSURANCE

- A. Contractor / Installer shall have been in business for five (5) years providing/finishing similar size projects and complexity.
- B. Contractor shall be solely responsible for all subgrades built. Failures resulting from inadequate compaction or moisture content are the responsibility of the contractor. Contractor shall be solely responsible for any and all repairs.
- C. The representatives of the Owner's testing lab will not act as supervisor of construction, nor will they direct construction operations. Neither the presence of the Owner's testing lab representatives nor the testing by the Owner's testing lab shall excuse the contractors or subcontractors for defects discovered in their work during or following

- completion of the project. Correcting of inadequate compaction or moisture content is the sole responsibility of the contractor.
- D. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- E. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.
- F. Tests (See Part 3, Article "Testing and Observation" for Compaction Testing).

1.9 DELIVERY, STORAGE AND HANDLING

A. Transport, store and handle in strict accord with the local jurisdiction.

1.10 FIELD CONDITIONS

1.11 EXISTING SITE CONDITIONS

- A. Contractor shall acquaint himself with all site conditions. If unknown active utilities are encountered during work, notify Architect promptly for instructions. Failure to notify will make Contractor liable for damage to these utilities arising from Contractor's operations subsequent to discovery of such unknown active utilities.
- B. Existing civil and electrical improvements are shown on respective site plans to the extent known. Should the Contractor encounter any deviation between actual conditions and those shown, he is to immediately notify the Architect before continuing work.

1.12 ON SITE UTILITY VERIFICATION AND REPAIR PROCEDURES

- A. Ground-breaking requirements:
 - 1. All underground work performed by a Contractor must be authorized by the District's Construction Manager or the Low Voltage Consultant prior to start of construction.
 - 2. The Contractor is to obtain and keep the original School's construction utility site plans on site during all excavation operations. Contractor can contact the District's Construction Manager or Facilities Manager to procure the drawings.

B. Underground Utility Locating:

- 1. The contractor shall hire an Underground Utility Locating Service to locate existing underground utility pathways in areas effected by the scope of work for excavation.
- 2. Contractor must use an underground utility locator service with a minimum of 3 years experience. The equipment operator must have demonstrated experience. Contact Norcal Underground Locating (800/986-6722) or Precision Locating (800/577-7324)

EARTHWORK SECTION 31 0000 21-1504

- 3. The Underground Utility Locator Service must have the use of equipment with the ability to locate by means of inductive clamping, induction, inductive metal detection, conductive coupling, or TransOnde (Radiodetection) to generate signals, passive locating (free scoping) for "hot" electric, and metal detector.
- 4. The Underground Utility Locator Service must be able to locate existing utilities at a depth of at least 72".
- 5. The Underground Utility Locator Service must be able to locate but are not limited to locating the following types of utility pathways:
 - a. All conduit pathways containing 110 volt or greater 50-60Hz electrical wire.
 - b. All conduit pathways containing an active cable TV system.
 - c. All conduit pathways containing wire or conductor in which a signal can be attached and generated without damaging or triggering the existing systems.
 - d. All empty conduit pathways or pipe in which a signal probe or sonde (miniature transmitter) can be inserted.
 - e. All conduit pathways containing non-conductive cables or wires in which a signal probe or sonde (miniature transmitter) can be inserted.
 - f. All plastic and other nonconductive water lines in which a TransOnde Radiodetection) or other "transmitter" can be applied to create a low frequency pressure waive (signal) without damaging or triggering the existing systems.
 - g. All copper or steel waterlines and plastic or steel gas lines.
- 6. All markings made by the Underground Utility Locator Service or other shall be clear and visible.
- 7. The contractor shall maintain all markings made by Underground Utility Locator Service or other throughout the entire length of the project.
- 8. The Underground Utility Locator Service shall provide the contractor with two sets of maps showing the location of utilities and average depth. They will be referenced to permanent buildings. Contractor will deliver one copy to the district at no additional charge.
- 9. Contractor is responsible to contact Underground Service Alert (U.S.A. 800/227-2600) and receive clearance prior to any excavation operations.
- Contractor shall inform the (District's Construction Manger)(Architect)(Owner) no later than five (5) days prior to the date scheduled for the utility locator service to be on site.

1.13 PROTECTION

A. Adequate protection measures shall be provided to protect workmen and passers-by on and off the site. Adjacent property shall be fully protected throughout the operations. Blasting will not be permitted. Prevent damage to adjoining improvements and properties both above and below grade. Restore such improvements to original condition should damage occur. Replace trees and shrubs outside building area disturbed by operations.

- B. In accordance with generally accepted construction practices, the Contractor shall be solely and completely responsible for working conditions at the job site, including safety of all persons and property during performance of the work. This requirement shall apply continuously and shall not be limited to normal working hours.
- C. Any construction review of the Contractor's performance conducted by the Geotechnical Engineer is not intended to include review of the adequacy of the Contractor's safety measures, in, on, or near the construction site.
- D. Provide shoring, sheeting, sheet piles and or bracing to prevent caving, erosion or gullying of sides of excavation.
- E. Surface Drainage: Provide for surface drainage during period of construction in manner to avoid creating nuisance to adjacent areas. The contractor shall make a reasonable effort on a daily basis to keep all excavations and the site free from water during entire progress of work, regardless of cause, source, or nature of water.
- F. Adjacent streets and sidewalks shall be kept free of mud, dirt or similar nuisances resulting from earthwork operations.
- G. The site and adjacent influenced areas shall be watered as required to suppress dust nuisance. Dust control measures shall be in accordance with the local jurisdiction.
- H. Trees: Carefully protect existing trees that are to remain. Provide temporary irrigation as necessary to maintain health of trees.

1.14 SEASONAL LIMITS

- A. No fill material shall be placed, spread or rolled during unfavorable weather conditions. When work is interrupted by rains, fill operations shall not be resumed until field tests indicate that moisture content and density of fill are satisfactory.
- B. Excessively wet fill material shall be bladed and aerated per Article "Subgrade Preparation".

1.15 TESTING

- A. General: Refer to Section 01 4523 TESTING AND INSPECTION SERVICES, AND STRUCTURAL TESTS AND INSPECTIONS LIST, DSA-103.
- B. Geotechnical Engineer: Owner is retaining a Geotechnical Engineer to determine compliance of fill with Specifications, and to direct adjustments in fill operations. Costs of Geotechnical Engineer will be borne by Owner; except those costs incurred for retests or re-inspection will be paid by Owner and backcharged to Contractor.
 - 1. If Contractor elects to process or mine onsite materials for use as Suitable Fill, Aggregate Sub Base, Aggregate Base, Rock, Crushed Rock or sand the cost of all testing of this material shall be paid for by the Contractor.
 - 2. Testing of import fill for compliance with Department of Toxic Substance Control (DTSC) shall be paid for by the Contractor.

EARTHWORK SECTION 31 0000 21-1504

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Engineered Fill Materials: All fill shall be of approved local materials supplemented by imported fill if necessary. "Approved" local materials are defined as local soils tested and approved by Geotechnical Engineer free from debris, and concentrations of clay and organics; and contain rocks no larger than 3-inches in greatest dimension. The soil and rock should be thoroughly blended so that all rock is surrounded by soil. This may require mixing of the soil and rock with a dozer prior to placement and compaction. Clods, rocks, hard lumps or cobbles exceeding 3-inches in final size shall not be allowed in the upper 12 inches of any fill.
- B. Imported Engineered Fill Material: Imported fill may be required to complete work. Proposed import fill material shall meet the above requirements; shall be similar to the native soils. Import fill shall meet the above requirements; shall have plasticity index of 15 or less; an Expansion Index of 20 or less; be free of particles greater than three-inch (3") in largest dimension; be free of contaminants and have corrosion characteristics within the acceptable limits. All import fill material shall be tested and approved by Soils Engineer prior to transportation to the site. Proposed fill material shall comply with DTSC guidelines to include Phase 1 environmental site assessment and related tests. Refer to the October 2001 DTSC Information Advisory for clean imported fill material.
 - 1. DTSC TESTING: Site work contractor is to coordinate testing with an analytical lab, hired by the owner, licensed by the State of California for the DTSC testing. The costs associated with testing will be paid by the contractor.
 - 2. DTSC testing shall include documentation as to the previous land use, location, and history. Soils shall be analyzed for all compounds of concern to ensure the imported soil is uncontaminated and acceptable. Testing shall be performed per the recommendations included in DTSC Imported Fill Advisory http://www.dtsc.ca.gov/Schools/upload/SMP FS Cleanfill-Schools.pdf). Soils shall be tested prior to import to the project site.
 - 3. Lab shall determine geographically which tests and analysis comparison will be appropriate for the testing. (CAM 17 / Title 22); (RWQCB) Regional Water Quality Control Board; or (OEHHA) Office of Environmental Health Hazard Assessment.
 - 4. Frequency of testing shall be conducted in accordance with DTSC's Imported Fill Advisory as follows;

Fill Material Sample Schedule				
Area Of Individual Borrow Area	Sampling Requirements			
2 Acres or less	Minimum of 4 samples			
2 to 4 Acres	Minimum of 1 sample every ½ acre			
4 to 10 Acres	Minimum of 8 samples			

Greater than 10 Acres	Minimum	of	8	locations	with	4
	subsamples per location					

Volume of Borrow Area Stockpile	
Up to 1,000 Cubic Yards	1 sample per 250 cubic yards
1,000 to 5,000 Cubic Yards	4 samples for the first 1000 cubic yards + 1 sample per each additional 500 cubic yards
Greater than 5,000 Cubic Yards	12 samples for the first 5,000 cubic yards + 1 sample per each additional 1,000 cubic yards

5. Reports/ Documentation

a. Results of the testing analysis shall be sent to the Owner; Architect; Project Inspector, Project Civil Engineer, DTSC, and DSA. Letter shall reference DSA file and application numbers.

C. Landscape Backfill Material:

- 1. The top 3" of native topsoil stripped from the site may be used for landscape backfill material.
- D. Water: Furnish all required water for construction purposes, including compaction and dust control. Water shall be potable.
- E. Aggregate Base: Provide Class 2 3/4" Aggregate Base conforming to standard gradation as specified in Cal Trans Standard Specifications, Section 26,-1.02A.

PART 3 - EXECUTION

3.1 INSPECTION LAYOUT AND PREPARATION

- A. Prior to installation of the work of this Section, carefully inspect and verify by field measurements that installed work of all other trades is complete to the point were this installation may properly commence
- B. Layout all work, establish grades, locate existing underground utilities, set markers and stakes, setup and maintain barricades and protection facilities; all prior to beginning actual earthwork operations. Layout and staking shall be done by a licensed Land Surveyor or Professional Civil Engineer.
- C. Verify that specified items may be installed in accordance with the approved design.

EARTHWORK SECTION 31 0000 21-1504

D. In event of discrepancy, immediately notify Owner and the Architect. Do not proceed in discrepant areas until discrepancies have been fully resolved.

3.2 PERFORMANCE

A. GENERAL:

- 1. General: Do all grading, excavating and cutting necessary to conform finish grade and contours as shown. All cuts shall be made to true surface of subgrade.
- 2. Archaeological Artifacts: Should any artifacts of possible historic interest be encountered during earthwork operations, halt all work in area of discovery and immediately contact the Architect for notification of appropriate authorities.
- Degree of Compaction: Percentage of maximum density, hereinafter specified
 as degree of compaction required, means density equivalent to that percentage
 of maximum dry density determined by ASTM D1557 Compaction Test method,
 and such expressed percentage thereof will be minimum acceptable compaction
 for specified work.
- 4. Moisture Content: Moisture content shall be as noted below and as called for on the plans. Moisture content shall be maintained until subgrade is covered by surfacing materials.

3.3 DEMOLITION, DISPOSAL AND DISPOSITION OF UNDESIRABLE MAN-MADE FEATURES

A. All other obstructions, such as abandoned utility lines, septic tanks, concrete foundations, and the like shall be removed from site. Excavations resulting from these removal activities shall be cleaned of all loose materials, dish shaped, and widened as necessary to permit access for compaction equipment. Areas exposed by any required over-excavation should be scarified to a depth of 12", moisture-conditioned to near optimum moisture content, and recompacted to at least 90% of the maximum dry density.

3.4 TESTING AND OBSERVATION

- A. All grading and earthwork operations shall be observed by the Geotechnical Engineer or his representative, serving as the representative of the Owner.
- B. Field compaction tests shall be made by the Geotechnical Engineer or his representative. If moisture content and/or compaction are not satisfactory, Contractor will be required to change equipment or procedure or both, as required to obtain specified moisture or compaction. Notify Geotechnical Engineer at least 48 hours in advance of any filling operation.
- C. Earthwork shall not be performed without the notification or approval of the Geotechnical Engineer or his representative. The Contractor shall notify the Geotechnical Engineer at least two (2) working days prior to commencement of any aspect of the site earthwork.

- D. If the Contractor should fail to meet the compaction or design requirements embodied in this document and on the applicable plans, he shall make the necessary readjustments until all work is deemed satisfactory, as determined by the Geotechnical Engineer or Architect/Engineer.
- E. After each rain event Geotechnical Engineer shall test fill material for optimum moisture. Do not place any fill material until desired moisture is achieved.

3.5 CLEARING AND GRUBBING

A. Prior to grading, remove all debris off-site. Remove trees and brush including the root systems. Holes resulting from tree and brush removal should be prepared and backfilled in accordance with paragraphs 3.7, 3.8, 3.9, and 3.10. This may require deepening and/or widening the holes to adequately remove disturbed soil and provide room for compaction equipment. Strip the surface of all organics.

3.6 CUTTING

- A. Do all cutting necessary to bring finish grade to elevations shown on Drawings.
- B. When excavation through roots is necessary, cut roots by hand.
- C. Carefully excavate around existing utilities to avoid unnecessary damage. The contractor shall anticipate and perform hand work near existing utilities as shown on the survey, without additional claims or cost.

3.7 STRUCTURAL EXCAVATION

- A. General: Excavate to bear on firm material at contract depth shown on Drawings.
- B. Footings: All footing excavations shall be of sufficient width for installation of formwork, unless earth will retain its position during concreting. All portions of footings above grade must be formed. In the event that footings are placed against earth, footing widths below grade shall be increased 2 inches from those shown on Drawings and positive protection shall be provided for top corners of trench.
- C. Unsuitable Ground: Any errors in structural excavation, soft ground, or clay soils found when excavating shall be reported to Architect. In no case shall work be built on any such soft or clayey unsuitable surface without direction from the Architect. Restore excavations to proper elevation with engineered fill material compacted to 90% of dry density.

3.8 SUBGRADE PREPARATION

- A. Grade compact and finish all subgrades within a tolerance of 0.10' of grades as indicated on Drawings and so as not to pool water. Subgrade within building pads and concrete walks shall be within 0.05' of grades indicated.
- B. After clearing, grubbing and cutting, subsurface shall be plowed or scarified to a depth of at least 12", until surface is free from ruts, hummocks or other uneven features. Moisture condition to least 2% above optimum moisture content and recompact to at

EARTHWORK SECTION 31 0000 21-1504

least 90% of the maximum dry density as determined by ASTM Test Method D1557. If the existing soils are at a water content higher than specified, the contractor shall provide multiple daily aerations by ripping, blading, and/or discing to dry the soils to a moisture content where the specified degree of compaction can be achieved. After seven consecutive working days of daily aerations, and the moisture content of the soil remains higher than specified, the contractor shall notify the architect. If the existing soils have a moisture content lower than specified, the contractor shall scarify, rip, water and blade existing soil to achieve specified moisture content. The contractor shall make proper allowance in schedule and methods to complete this work.

- C. After subgrade for fill within building pad area or within paved areas has been cleared, plowed and scarified, it shall be disked or bladed until uniform and free from large clods, brought to (optimum) (2% above optimum) moisture content and compacted to not less than 90% of maximum dry density, as determined by ASTM Test Method D1557, and such expressed percentage thereof will be minimum acceptable density for specified work.
- D. Subgrade in areas to receive landscaping shall be compacted to (90%).
- E. Where Contractor over-excavates building pads through error, resulting excavation shall be recompacted as engineered fill at Contractor's expense.

3.9 PLACING, SPREADING AND COMPACTING FILL MATERIAL IN BUILDING PAD AND PAVEMENT AREAS

- A. Selected fill material shall be placed in layers which, when compacted, shall not exceed 6 inches in compacted thickness. Each layer shall be spread evenly and thoroughly mixed to insure uniformity in moisture content.
- B. Selected fill material shall be moisture-conditioned to specified moisture content. Selected fill material shall be unfrozen. When moisture content of fill material is below that specified, add water until proper moisture content is achieved. When moisture content is above that specified, aerate by blading or other methods mentioned in 3.08 B until moisture content is satisfactory.
- C. After each layer has been placed, mixed and spread evenly, it shall be thoroughly compacted to a minimum of 90% as determined by the ASTM D1557 Compaction Test. Compact each layer over its entire area until desired density has been obtained.
- D. Recompaction of Fill in Trenches and Compaction of Fill Adjacent to Walls: Where trenches must be excavated, backfill with material excavated. Place in lifts that when compacted do not exceed 6", moisture conditioned to at least 2% above optimum moisture content, and compact to a minimum of 90% relative compaction in building pad and paved areas, and to 90% relative compaction in landscape areas.
- E. Jetting of fill materials will not be allowed.

3.10 FINAL SUBGRADE COMPACTION

- A. Concrete Flatwork: Upper 12" of all subgrades shall be uniformly compacted at specified moisture content to at least 90% of maximum dry density, as determined by ASTM D1557 Compaction Test, regardless of whether final subgrade elevation is attained by filling, excavation, or is left at existing grade. After acceptance of final compaction test, contractor shall maintain the required moisture content of subgrade until concrete flatwork is placed.
- B. Paved Areas: Upper 12" of all final subgrades supporting pavement sections shall be brought to specified moisture content and shall be uniformly compacted to not less than 95% of maximum dry density, regardless of whether final subgrade elevation is attained by filling, excavation, or is left at existing grade. After acceptance of final compaction test, contractor shall maintain the required moisture content of subgrade until concrete flatwork is placed.
- C. Other Fill and Backfill: Upper 12" of all other final subgrades or finish grades shall be compacted to 90% of maximum dry density.
- D. Gravel Fill: Do not place compacted gravel fill until after underground work and foundations are in place. Compact gravel fill with vibratory plate or similar equipment to preclude settlement.

3.11 PLACING, SPREADING, AND COMPACTION OF LANDSCAPE BACKFILL MATERIALS

- A. All landscaped areas shall receive topsoil. After subgrade under landscape area has been scarified and brought to 90% maximum dry density, top soil shall be placed evenly to depth of 12" at 85% of maximum dry density.
- B. Project Inspector must verify that materials are uniformly spread to minimum depth specified.

3.12 SLOPE CONSTRUCTION

A. Cut slopes shall be constructed to no steeper than 2:1 (horizontal:vertical). Fill slopes shall be constructed to no steeper than 2:1 (horizontal:vertical). Prior to placement of fill on an existing slope the existing slope shall be benched. The benches shall be in a ratio of 2 horizontal to 1 vertical. The face of the fill slopes shall be compacted as the fill is placed, or the slope may be overbuilt and then cut back to the design grade. Compaction by track walking will not be allowed.

3.13 FINISH GRADING

A. At completion of project, site shall be finished graded, as indicated on Drawings. Finish grades shall be "flat graded" to grades shown on the drawing. Mounding of finish grades will not be allowed unless otherwise directed on the landscape drawings. Tolerances for finish grades in drainage swales shall be +-0.05'. Tie in new and existing finish grades. Leave all landscaped areas in finish condition for lawn seeding. Landscaped planters shall be graded uniformly from edge of planter to inlets. If sod is

EARTHWORK SECTION 31 0000 21-1504

used for turf areas the finish grade on which it is placed shall be lowered to allow for sod thickness.

B. All landscape areas shall be approved by Architect prior to any planting.

3.14 SURPLUS MATERIAL

A. Excavated material not required for grading or backfill shall be removed from site at contractor's expense.

3.15 CLEANING

- A. Refer to Section 01 7700.
- B. Remove from fill all vegetation, wood, form lumber, casual lumber, and shavings, in contact with ground; buried wood will not be permitted in any fill.

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - Trench backfill materials.

1.2 RELATED REQUIREMENTS

- A. Document 01 5000, Temporary Facilities and Controls.
- B. Section 31 0000, Earthwork.
- C. Section 33 4000, Storm Drainage Utilities.

1.3 REREENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. California Plumbing Code (CPC), edition as noted on the drawings.

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.

B. Coordination:

1. General Contractor shall coordinate work as herein specified, in accordance with drawings and as required to complete scope of work with all related trades.

1.5 ACTION SUBMITTALS

A. Provide supplier's descriptive literature for all products to demonstrate compliance with specified attributes:

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For contractor / Installer.

TRENCHING AND BACKFILLING SECTION 31 2333 21-1504

1.7 CLOSEOUT SUBMITTALS

A. Guarantee: Submit subcontractor's guarantee.

1.8 QUALITY ASSURANCE

- A. Contractor / Installer shall have been in business for five (5) years providing/finishing similar size projects and complexity.
- B. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- C. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

1.9 DELIVERY, STORAGE AND HANDLING

A. Transport, store and handle in strict accord with the local jurisdiction.

1.10 FIELDCONDITIONS

- A. Contractor shall acquaint himself with all existing site conditions. If unknown active utilities are encountered during work, notify Architect promptly for instructions. Failure to notify will make Contractor liable for damage to these utilities arising from Contractor's operations subsequent to discovery of such unknown active utilities.
- B. Trench dewatering may be necessary. Contractor shall provide any and all tools, equipment and labor necessary for trench dewatering no matter what the source. Dewatering shall be continuous until all site utilities are installed and backfilled.

1.11 PROTECTION

- A. Adequate protection measures shall be provided to protect workers and passers-by on and off the site. Adjacent property shall be fully protected throughout the operations. Blasting will not be permitted. Prevent damage to adjoining improvements and properties both above and below grade. Restore such improvements to original condition should damage occur. Replace trees and shrubs outside building area disturbed by operations. Repair all trenches in grass areas with new sod (seeding not permitted) and "stake-off" for protection.
- B. Contractor shall be solely and completely responsible for working conditions at the job site, including safety of all persons and property during performance of the work. This requirement shall apply continuously and shall not be limited to normal working hours.
- C. Any construction review of the Contractor's performance conducted by the Architect or Owner is not intended to include review of the adequacy of the Contractor's safety measures. in. on or near the construction site.
- D. Provide shoring, sheeting, sheet piles and or bracing to prevent caving, erosion or gullying of sides of excavation.

- E. Surface Drainage: Provide for surface drainage during period of construction in manner to avoid creating nuisance to adjacent areas. Keep all excavations free from water during entire progress of work, regardless of cause, source or nature of water.
- F. Adjacent streets and sidewalks shall be kept free of mud, dirt or similar nuisances resulting from earthwork operations.
- G. The site and adjacent influenced areas shall be watered as required to suppress dust nuisance.
- H. Trees: Carefully protect existing trees which are to remain.

1.12 TRENCH SAFETY PROVISIONS

- A. General Contractor shall be solely responsible for safety design, construction and coordination with agencies having jurisdiction. If such plan varies from shoring system standards established by Construction Safety Orders, plan shall be prepared by registered civil or structural engineer.
- B. Nothing herein shall be deemed to allow use of shoring, sloping or protective system less effective than that required by Construction Safety Orders of California State Division of Industrial Safety.
- C. When trenching through paved surface, provide steel trench plates to cover open trenches daily until trenches are backfilled.

1.13 SEASONAL LIMITS

- A. No backfill material shall be placed, spread or rolled during unfavorable weather conditions. When work is interrupted by heavy rains, full operations shall not be resumed until field tests indicate that moisture content and density of fill are satisfactory.
- B. Material above optimum moisture shall be processed per Section 31 0000, Part 3, Article "Subgrade Preparation".

1.14 TESTING

A. General: Refer to Section 31 0000, Part 1, Article "Testing" and Part 3, Article "Testing and Observation".

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Backfill materials: Pipeline and conduit trench backfill as shown on the plans and as specified below.
 - 1. ¾ inch crush rock.

TRENCHING AND BACKFILLING SECTION 31 2333 21-1504

- 2. Native Materials: Soil native to Project Site, free of wood, organics, and other deleterious substances. Rocks shall not be greater than 3-inches.
- 3. Sand: Fine granular material, free of organic matter, mica, loam or clay.
- 4. Lean Mix Concrete: 3 sacks of cement per yard plus sand.
- 5. Class 2 aggregate base, ³/₄" rock, per Caltrans Section 26-1.02B
- 6. Controlled Density Fill: 3 sack slurry backfill.
- B. Water: Furnish all required water for construction purposes, including compaction and dust control. Water shall be potable.
- C. Provide other bedding and backfill materials as described and specified in Section 33 0000, Section 33 4000 and Divisions 22 and 26.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verification of Conditions:
 - 1. Examine areas and conditions under which work is to be performed.
 - 2. Identify conditions detrimental to proper or timely completion of work and coordinate with General Contractor to rectify.

3.2 INSTALLATION

A. Perform work in accordance with pipe manufacturer's recommendations, as herein specified and in accordance with drawings.

3.3 TRENCHING

- A. Make all trenches open vertical construction with sufficient width to provide free working space at both sides of trench around installed item as required for caulking, joining, backfilling and compacting; not less than 12 inches wider than pipe or conduit diameter, unless otherwise noted.
- B. Carefully excavate around existing utilities to avoid unnecessary damage. The contractor shall anticipate and perform hand work near existing utilities as shown on the survey, without additional claims or cost.
- C. Trench straight and true to line and grade with bottom smooth and free of edges or rock points.
- D. Where depths are not shown on the plans, trench to sufficient depth to give minimum fill above top of installed item measured from finish grade above the utility as follows:

Sewer pipe: depth to vary
 Storm drain pipe: depth to vary

3. Water pipe - Fire Supply: 36 inches

4. Water pipe – Domestic Supply: 30 inches

3.4 BACKFILL

- A. Pipe Trench Backfill is divided into three zones:
 - 1. Bedding: Layer of material directly under the pipe upon which the pipe is laid.
 - 2. Pipe Zone: Backfill from the top of the bedding to 6 inches (compacted) over the top of the pipe.
 - 3. Upper Zone: Backfill between top of Pipe Zone and to surface of subgrade.
- B. Bedding: Type of material and degree of compaction for bedding backfill shall be as defined in the Details and Specifications.
- C. Pipe Zone and Upper Zone Backfill:
 - 1. Type of material and degree of compaction Pipe Zone and Upper Zone Backfill shall be as required by Drawings, Details, & Specifications.
 - 2. Upper Zone Backfill shall not be placed until conformance of Bedding and Pipe Zone Backfill with specified compaction test requirements has been confirmed.
 - 3. Backfill shall be brought up at substantially the same rate on both sides of the pipe and care shall be taken so that the pipe is not floated or displaced. Material shall not be dropped directly on pipe.

D. Backfill Compaction:

- 1. Backfill shall be placed in layers which, when compacted shall not exceed 6 inches in thickness. Each layer shall be spread evenly and thoroughly mixed to insure uniformity. Do not backfill over, wet, frozen or soft subgrade surfaces. Employ a placement method that does not disturb or damage foundation walls, perimeter drainage, foundation damp-proofing, waterproofing or protective cover.
- 2. When moisture content of fill material is below that required to achieve specified density, add water until proper moisture content is achieved. When moisture content is above that required, aerate by blading or other methods until specified moisture content is met; see Section 31 0000, Part 3, Article "Subgrade Preparation".
- 3. After each layer has been placed, mixed and spread evenly, it shall be thoroughly compacted to 90% of maximum dry density while at specified moisture content. Compact each layer over its entire area until desired density has been obtained.
- 4. Compaction: All backfill operations shall be observed by the Inspector of Record and/or Geotechnical Engineer. Field density tests shall be made to check compaction of fill material. If densities are not satisfactory, Contractor will be required to change equipment or procedure or both, as required to obtain specified densities. Notify Inspector and Architect at least 24 hours in advance of any operation.
- E. Backfill in Areas Previously Lime or Cement Treated

TRENCHING AND BACKFILLING SECTION 31 2333 21-1504

1. Where trenching occurs in areas that have been lime or cement treated, class 2 aggregate bases or approved controlled density backfill material shall be used for the top 12-inches minimum of the trench or thickness shall match the depth of treated material.

3.5 TRENCH AND SITE RESTORATION

A. Finished surface of trenches shall be restored to a condition equal to, or better than the condition as existed prior to excavation work.

3.6 PROTECTION

- A. Protect existing surfaces, structures, and utilities from damage. Protect work by others from damage. In the event of damage, immediately repair or replace to satisfaction of Owner.
- B. Repair existing landscaped areas to as new condition. Replant trees, shrubs or groundcover with existing materials if not damaged or with new materials if required. Replace damaged lawn areas with sod, no seeding will be permitted.
- C. Replace damaged pavement with new compatible matching materials. Concrete walks to be removed to nearest expansion joint and entire panel replaced. Asphalt to be cute neatly and replaced with new materials.
- D. Any existing materials removed or damaged due to trenching to be returned to new condition.

3.7 SURPLUS MATERIAL

A. Remove excess excavated material, unused materials, damaged or unsuitable materials from site.

3.8 CLEANING

- A. Refer to Section 01 7700.
- B. Contractor will keep the work areas in a clean and safe condition so his rubbish, waste, and debris do not interfere with the work of others throughout the project and at the completion of work.
- C. After completion of work in this section, remove all equipment, materials, and debris. Leave entire area in a neat, clean, acceptable condition.

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Aggregate.
 - 2. Asphalt paving.
 - 3. Seal coat.
 - 4. Wood headers and stakes.
 - 5. Pavement marking.
 - 6. Precast concrete bumpers.

1.2 RELATED REQUIREMENTS

- A. Document 01 5000, Temporary Facilities and Controls.
- B. Section 01 6116, Volatile Organic Compound (VOC) Restrictions, for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- C. Section 31 0000, Earthwork.
- D. Section 31 2333, Trenching and Backfilling.
- E. Section 33 4000, Storm Drainage Utilities.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. Local Jurisdiction: Any work within the street, highway or right-of-way shall be performed in accordance with the requirement of the governmental agencies having jurisdiction, and shall not begin until all of those governing authorities have been notified.
- D. ASTM International (ASTM):
 - 1. D698-00 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.
 - 2. D1556-00 Test Method for Density of Soil in Place by the Sand-Cone Method.
 - 3. D1557-02 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures Using 10 lb. (4.54 Kg) Rammer and 18 inch (457 mm) Drop.

ASPHALT CONCRETE PAVING SECTION 32 1200 21-1504

- 4. D6628-16 Standard Specification for Color of Pavement Marking Materials.
- 5. D3017-05 Test Methods for Moisture Content of Soils and Soil-Aggregate Mixture by Nuclear Methods (Shallow Depth).
- 6. D4318-05 Test Method for Liquid Limit, Plastic Limit, and Plasticity Limit.
- E. CALTRANS Standard Specifications.
- F. CAL-OSHA, Title 8, Section 1590 (e).

1.4 ADMINISTRATION REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.

1.5 ACTION SUBMITTAS

A. Provide supplier's descriptive literature for all products to demonstrate compliance with specified attributes.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: For Contractor / Installer.
- B. Sustainable Design:
 - General
 - a. Submit information necessary to establish and document compliance with the California Green Building Standards Code.
 - b. Sustainable design submittals are in addition to other submittals.
 - 2. The following information shall be provided:
 - a. Adhesives and Sealants: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.
 - b. Paints and Coatings: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.

1.7 CLOSEOUT SUBMITTALS

A. Guarantee: Submit subcontractor's guarantee.

1.8 QUALITY ASSURANCE

A. Contractor / Installer shall have been in business for five (5) years providing/finishing similar size projects and complexity.

- B. Contractor shall be solely responsible for all subgrades built. Any repairs resulting from inadequate compaction is the responsibility of the contractor.
- C. The representatives of the Owner's testing lab will not act as supervisor of construction, nor will they direct construction operations. Neither the presence of the Owner's testing lab representatives nor the testing by the Owner's testing lab shall excuse the contractors or subcontractors for defects discovered in their work during or following completion of the project. Correcting inadequate compaction is the sole responsibility of the contractor.
- D. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
- E. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.
- F. Contractor shall provide verification that asphalt mix temperature meets the requirements of this specification at time of application.
- G. Tests (See Part 1, Article "Testing").

1.9 DELIVERY, STORAGE AND HANDLING

A. Transport, store and handle in strict accord with the local jurisdiction.

1.10 FIELD CONDITIONS

- A. Environmental Requirements:
 - 1. Base Course: Do not lay base course on muddy subgrade, during wet weather, or when atmospheric temperature is below 40 degrees F.
 - 2. Asphalt Surfacing: Do not apply asphaltic surfacing on wet base, during wet weather, or when atmospheric temperature is below 50 degrees F.

1.11 EXISTING SITE CONDITIONS

A. Contractor shall acquaint himself with all site conditions. If unknown active utilities are encountered during work, notify Architect promptly for instructions. Failure to notify will make Contractor liable for damage to these utilities arising from Contractor's operations subsequent to discovery of such unknown active utilities.

1.12 PROTECTION

A. Adequate protection measures shall be provided to protect workmen and passers-by on and off the site. Adjacent property shall be fully protected throughout the operations. Blasting will not be permitted. Prevent damage to adjoining improvements and properties both above and below grade. Restore such improvements to original condition should damage occur. Replace trees and shrubs outside building area disturbed by operations.

ASPHALT CONCRETE PAVING SECTION 32 1200 21-1504

- B. In accordance with generally accepted construction practices, the Contractor shall be solely and completely responsible for working conditions at the job site, including safety of all persons and property during performance of the work. This requirement shall apply continuously and shall not be limited to normal working hours.
- C. Any construction review of the Contractor's performance conducted by the owner's representative is not intended to include review of the adequacy of the Contractor's safety measures, in, on, or near the construction site.
- D. Surface Drainage: Provide for surface drainage during period of construction in manner to avoid creating nuisance to adjacent areas. The contractor shall make a reasonable effort on a daily basis to keep all excavations and the site free from water during entire progress of work, regardless of cause, source, or nature of water.
- E. Adjacent streets and sidewalks shall be kept free of mud, dirt or similar nuisances resulting from earthwork operations.
- F. The site and adjacent influenced areas shall be watered as required to suppress dust nuisance. Dust control measures shall be in accordance with the local jurisdiction.

1.13 SEASONAL LIMITS

A. No fill material shall be placed, spread or rolled during unfavorable weather conditions. When work is interrupted by rains, fill operations shall not be resumed until field tests indicate that moisture content and density of fill are satisfactory.

1.14 TESTING

- A. General: Refer to Section 01 4523 TESTING & INSPECTION SERVICES AND STRUCTURAL TESTS AND INSPECTIONS LIST, DSA-103.
- B. Geotechnical Engineer: Owner is retaining a Geotechnical Engineer to determine compliance of fill with Specifications, and to direct adjustments in fill operations. Costs of Geotechnical Engineer will be borne by Owner; except those costs incurred for retests or re-inspection will be paid by Owner and backcharged to Contractor.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

A. Sustainable Design:

- 1. VOC emissions for field-applied adhesives, sealants, and sealant primers must comply with limits specified in Section 01 6116.
- 2. VOC emissions for field-applied paints and coatings must comply with limits specified in Section 01 6116.

2.2 MATERIALS

- A. Sterilant: Soil sterilizer shall be CIBA GEIGY's Pramatol 25-E, Treflan EC or Thompson-Hayward Casoron.
 - 1. Soil sterilizer shall be applied in strict accordance with manufacturer's instructions.
- B. Base Course Aggregate: State Specifications, Section 26, Class 2 aggregate base (3/4" max.).
- C. Asphalt Binder: Steam-refined paving asphalt conforming to State Specifications, Section 92, viscosity grade PG 64-10. Asphalt binder additives for HMA per Caltrans approved list of manufacturers.
- D. Liquid Asphalt Tack Coat: Per CALTRANS section 94.
- E. Surface Course Aggregate: Mineral aggregates for Type "B" asphalt concrete, conforming to State Specifications 39-2.02, Type B, ½" maximum, medium grading. 3/8" maximum grading at Playcourt.
- F. Seal Coat: shall be a pre-mixed asphalt emulsion blended with select fillers and fibers such as:
 - 1. "Park-Top No. 302", Western Colloid Products.
 - "Overcoat". Reed and Gram.
 - 3. "Drivewalk". Conoco Oil.
- G. Wood Headers and Stakes: Pressure treated.
- H. Pavement Marking: Colors as directed by Architect. Colors of painted traffic stripes and pavement markings must comply with ASTM D6628.
 - 1. Waterborne traffic line colors white, yellow and red, State specification PTWB-01R3.
 - 2. Waterborne traffic line for the international symbol of accessibility and other curb markings blue, red and green, Federal specification TT-P-1952F.
- I. Precast Concrete Bumpers: 3000 psi at 28 day minimum strength; 48" length unless otherwise indicated; provide with steel dowel anchors and concrete epoxy.
- J. Pavement Epoxy; K-Lite; Ktepx-590; Ennis Epoxy HPS2 or an approved equal.
- K. Crack Filler; QPR model CAR08, 10oz asphalt crack filler; Star STA-FLEX Trowel Grade crack filler or approved equal.
- L. Reclaimed Asphalt Paugment (RAP). HMA Type A or Type B may be produced using RAP providing it does not exceed 15% or the aggregate blend.

ASPHALT CONCRETE PAVING SECTION 32 1200 21-1504

2.3 MIXES

- A. General: Plant mixed conforming to State Specifications, Section 39, Type B, ½" maximum, medium grading. 3/8" maximum grading shall be used at hardcourt.
- B. Temperature of Hot Mix Asphalt: Not less than 275 degrees F nor more than 325 degrees F when added to aggregate.
- C. Temperature of Hot Mix Aggregate: Not less than 250 degrees F nor more than 325 degrees F when asphalt is added.
- D. Temperature of Hot Mix Asphalt Concrete: Asphalt shall be not less than 285 degrees at time of application, nor more than 350 degrees. Asphalt not meeting the required temperature shall not be used.
- E. Temperature of Warm Mix Asphalt: Mixing and placement; per the approved manufactures heat range recommendations for mixing and placement.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Conditions of Work in Place: Subsurfaces which are to receive materials specified under this Section shall be carefully examined before beginning work hereunder, and any defects therein shall be reported, in writing, to the Architect. Work shall not be started until such defects have been corrected. Starting of work shall imply acceptance of conditions as they exist.

3.2 PREPARATION

A. Sub-Grade: Clean, shape and compact to hard surface free from elevations or depressions exceeding 0.05' in 10' from true plan. Compact per Section 31 0000. Compaction and moisture content shall be verified immediately prior to placement of aggregate base. Proof roll subbase in presence of geotechnical engineer prior to placement of aggregate base.

3.3 INSTALLATION

A. Headers:

- 1. General: Install as edging to asphalt paving, except where adjoining existing pavement, concrete curbs, walks or building.
- 2. Existing Headers: Remove existing headers where new paving will join existing. Saw cut existing asphalt to provide clean edge.
- 3. Lines and Levels: Install true to line and grade. Cut off tops of stakes 2-inches below top of header so they will not be visible on completion of job.

B. Asphalt Paving:

- 1. Base Course: Install in accord with State Specifications, Section 26. Compact to relative compaction of not less than 95%, ASTM D1557. The material shall be deposited on the subgrade in such a manner as to provide a uniform section of material within five percent tolerance of the predetermined required depth. Deposition will be by spreader box or bottom dump truck to prevent segregation of the material. The material so deposited on the subgrade shall have sufficient moisture which, in the opinion of the Architect is adequate to prevent excessive segregation. It shall then be immediately spread to its planned grade and cross section. Undue segregation of material, excessive drifting or spotting of material will not be permitted. If in the opinion of the site geotechnical engineer, the material is unsuitably segregated, it shall be removed or completely reworked to provide the desired uniformity of the material.
 - a. Moisture content and compaction of base material shall be tested immediately prior to placement of asphalt paving.
- 2. Sterilant: Apply specified material at manufacturer's recommended rate. Applicator of sterilant material shall be responsible for determining location of all planter areas. Apply specified material over entire base course area just prior to application of asphalt. Follow manufacturer's printed directions.
- 3. Liquid Asphalt Tack Coat: Apply as "tack coat" to all vertical surfaces of existing paving, curbs, walks, and construction joints in surfacing against which paving is to be placed.
- 4. Asphalt Concrete Surface Course:
 - a. Comply with State Specifications, 39-6 except as modified below.
 - 1) Final gradation shall be smooth, uniform and free of ruts, humps, depressions or irregularities, with a minimum density of 91% of the theoretical maximum specific gravity determined by California Test Method #309. Maximum variation 1/8 inch in 10' when measured with steel straightedge in any one direction. Test paved areas for proper drainage by applying water to cover area. Correct portions that do not drain properly by patching with plant mix. In no case shall accessible parking spaces or loading and unloading areas exceed 2% slope in any direction.
 - 2) Asphalt material shall be delivered to the project site in a covered condition to maintain acceptable temperature.
- 5. Placement and adjustment of Frames, Covers, Boxes and Grates: The Contractor shall set and adjust to finish grade all proposed and existing frames, covers, boxes, and grates of all manholes, drop inlets, drain boxes, valves, cleanouts, electrical boxes and other appurtenant structures prior to placement of asphaltic concrete.
- 6. Water Testing: All paved areas shall be water tested, to check drainage, in the presence of the project inspector prior to placement of seal coat. The surface of asphalt paving shall not vary more than 1/8 inch above or below the grade established on the plans. If variations in grade are present, they will be corrected by overlaying paving and/or pavement removal and replacement as directed by the Architect.
- 7. Patching: Cut existing paving square and plumb at all edges to be joined by new paving. In trenches; grind existing asphalt on each side of trench 3" wide x $\frac{1}{2}$ the

ASPHALT CONCRETE PAVING SECTION 32 1200 21-1504

depth of the section. Apply tact coat to vertical surfaces before installing new work. Warp carefully to flush surface, with seal over joints, and feather edge. Sawcut, remove and patch existing paving where cutting is necessary for installation of piping or conduits under Divisions 15, 16 and 33.

Seal Coat:

- a. Seal coat shall be applied no sooner than 30 days from time of asphalt placement.
- b. Surface Preparation: surface and cracks shall be clean of all dirt, sand, oil or grease. All cracks shall be filled to a level condition after curing. Make multiple fill applications until a level condition is achieved. Failure to do so will be the reason for rejection. Hose down entire area with a strong jet of water to remove all debris. Remove soft, loose, or otherwise damaged areas of asphalt concrete to full depth of damage and replace with compacted hot mix asphalt concrete as specified herein. Minor holes and imperfections may be patched using hot mix asphalt or mastic using sand/SS-1-H. Use wire brush for removal of oil and grease; prime with shellac or synthetic resin as recommended by manufacturer of pavement sealer material.
- c. Seal Coat Seal Application: Thoroughly mix materials in the presence of the onsite inspector. Failure to do so will be cause for rejection. Apply in accordance with manufacturer's written instructions.
 - a. The minimum application rate for each applied coat shall be 30gals per 1000 sq. ft. Two coats of sealcoat will be required.
 - b. Clean-Up and Precautions: As recommended by pavement sealer material manufacturer.
- d. Clean-Up and Precautions: As recommended by pavement sealer material manufacturer.
- C. Pavement Marking: painted pavement markings shall be done only after the seal coat has thoroughly dried. On clean surfaces to be painted with traffic paint of dust, dirt, grime, oil, rust or other contaminants which will impair the quality of work or interfere with proper bond of paint coats. Surfaces shall be cleaned to the extent and by whatever means that will satisfactorily accomplish the purpose without damage to asphalt concrete. Provide measured layouts, temporary markings, templates, and other means necessary to provide required marking. Prepare and apply paint in accordance with manufacturer's instructions; paint shall be applied by spray and shall achieve complete coverage free from voids and thin spots. Where indicated on the Drawings, paint parking stall strips, lettering, arrows, accessible symbols, playground markings, game striping, maps, etc. on concrete paving or asphalt concrete paving. Paint stripes shall be 4 inches wide (except otherwise indicated) and applied with two (2) coats of herein specified Traffic Line Paint; white (except as otherwise specified or indicated).
 - 1. International Accessible Symbol: Symbol shall be white figures on a blue background. Blue shall be equal to color No. 15090 in Fed. Std. 595c. Lines and symbols shall be accurately formed and true to line and form; lines shall be straight and uniform in width. Painted edges shall be clean cut and free from raggedness, and corners shall be cut sharp and square. Tolerances: Apply striping within a tolerance 1/2 inch in 50 feet. Apply markings and striping to

widths indicated with a tolerance of 1/4 inch on straight sections and 1/2 inch on curved sections.

- D. Colors: As directed by Architect
- E. Precast Concrete Bumpers: Install where shown, using steel dowels, and epoxy applied for length to wheel stop without damage to bumpers or asphalt concrete paving.

3.4 CLEANING

- A. Upon completion of work of this Section promptly remove from the working area all scraps, debris and surplus material of this Section.
- B. Clean excess material from surface of all concrete walks and utility structures.

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. Concrete curbs and gutters.
 - 2. Concrete pavement, sidewalks and ramps.
 - 3. Steel reinforcing for flatwork and curbs.
 - 4. Truncated domes.

1.2 RELATED REQUIREMENTS

- A. Section 01 4523, Testing & Inspection Services.
- B. Section 01 6116, Volatile Organic Compound (VOC) Restrictions; for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- C. Division 31, Earthwork.
- D. Section 32 1200, Asphalt Concrete Paving.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CALGreen), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. American Concrete Institute (ACI):
 - 1. 117: Specification for Tolerances for Concrete Construction and Materials and Commentary.
 - 2. 211.1: Standard Practice for Selecting Proportions for Normal, Heavyweight and Mass Concrete.
 - 3. 301: Specifications for Structural Concrete.
 - 4. 302.1R: Guide to Concrete Floor and Slab Construction.
 - 5. 305R: Guide to Hot Weather Concreting.
 - 6. 306R: Guide to Cold Weather Concreting.
 - 7. 308R: Guide to External Curing of Concrete.
 - 8. 318: Building Code Requirements for Structural Concrete and Commentary.
 - 9. 347R: Guide to Formwork for Concrete.
- D. ASTM International (ASTM):

SITE CONCRETE SECTION 32 1600 21-1504

- 1. A615/A615M: Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement.
- 2. A706/A706M: Standard Specification for Deformed and Plain Low-Alloy Steel Bars for Concrete Reinforcement.
- 3. C33/C33M: Standard Specification for Concrete Aggregates.
- 4. C94/C94M: Standard Specification for Ready-Mixed Concrete.
- 5. C143/C143M: Standard Test Method for Slump of Hydraulic-Cement Concrete.
- 6. C150C150M: Standard Specification for Portland Cement.
- 7. C260/C260M: Standard Specification for Air-Entraining Admixtures for Concrete.
- 8. C309: Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete.
- 9. C330/C330M: Standard Specification for Lightweight Aggregates for Structural Concrete.
- 10. C494/C494M: Standard Specification for Chemical Admixtures for Concrete.
- 11. C618: Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete.
- 12. C920: Standard Specification for Elastomeric Joint Sealants.
- 13. C1107/C1107M: Standard Specification for Packaged Dry, Hydraulic Cement Grout (Non-Shrink).
- 14. C1315: Standard Specification for Liquid Membrane-Forming Compounds Having Special Properties for Curing and Sealing Concrete.
- 15. D1751: Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types).
- 16. D5893/D5893M: Standard Specification for Cold Applied, Single Component, Chemically Curing Silicone Joint Sealant for Portland Cement Concrete Pavements.
- E. Concrete Reinforcing Steel Institute (CRSI):
 - Manual of Standard Practice.
 - 2. Placing Reinforcing Bars.
- F. State of California, Department of Transportation (Caltrans):
 - 1. Division of Engineering Services:
 - a. California Test 342: Method of Test for Surface Skid Resistance with the California Portable Skid Test.
 - 2. Standard Specifications.
 - a. Section 51, Concrete Structures.
 - b. Section 52, Reinforcement.
 - c. Section 73, Concrete Curbs and Sidewalks.
 - Section 90, Concrete.
- G. US Government General Services Administration (GSA/SAE):

1. GSA/SAE AMS-STD-595A: Colors Used In Government Procurement.

1.4 ADMINISTRATIVE REQUIREMENTS

A. Submittal Procedures:

- 1. Action Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
- 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.

1.5 ACTION SUBMITTALS

A. Shop Drawings: Joint pattern layout for walks and pavement.

B. Product Data:

- A complete list of materials proposed to be used for the site concrete work including, but not limited to, sand, gravel, admixtures, surface treatments, coloring agents, sealers, cast-in-place accessories, forming and curing products, concrete mix designs, reinforcing materials, joint materials, curing materials, and detectable warning surface.
- 2. Manufacturer's descriptive literature for products proposed for use. Include installation instructions, and maintenance instructions.
- C. Concrete Mix Design: The Contractor shall submit three copies of each proposed mix design for each class of concrete in accordance with ACI 301, Sections 3.9 "Proportioning on the Basis of Previous Field Experience or Trial Mixture," or 3.10 "Proportioning Based on Empirical Data." The Contractor shall submit a separate mix design for concrete to be placed by pumping, in addition to the mix design for concrete to be placed directly from the truck chute.
 - 1. The following information shall be included in the concrete mix design:
 - a. Proportions of cement, fine and coarse aggregate, and water.
 - b. Water-cement ratio, 28-day compressive design strength, slump, and air content.
 - c. Type of cement and aggregate.
 - d. Special requirements for pumping.
 - e. Range of ambient temperature and humidity for which design is valid.
 - f. Special characteristics of mix, which require precautions in mixing, placing, or finishing techniques to achieve specified finished product.
 - 2. Do not begin concrete production until mixes have been reviewed and approved by Engineer.
 - a. Review of mix design by the Architect and Engineer shall in no way relieve the subcontractor of his responsibility for the performance of the concrete.

1.6 INFORMATIONAL SUBMITTALS

A. Qualification Data: For manufacturer

SITE CONCRETE SECTION 32 1600 21-1504

- B. Delivery tickets as specified for ready-mixed concrete.
- C. Sustainable Design:
 - 1. The following information shall be provided:
 - a. Adhesives and Sealants: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.
 - b. Paints and Coatings: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.

1.7 CLOSEOUT SUBMITTALS

A. Guarantee: Submit subcontractor's guarantee.

1.8 QUALITY ASSURANCE

- A. Qualifications:
 - 1. Manufacturer of ready-mixed concrete products shall meet ASTM C94/C94M requirements for production facilities and equipment.
- B. Design, erect, support, brace and maintain formwork and shoring to safely support all loads that might be applied until such loads can be carried by concrete.
- C. The Contractor shall perform work in accordance with ACI 301.
- D. Use only new materials and products.
- E. Single-Source Responsibility: Use materials and products of one manufacturer whenever possible.
- F. Materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.
- G. Testing to determine compliance with the work of this Section will be the responsibility of the Contractor.
 - 1. Cement and reinforcing shall be tested in accordance with CBC Section 1910A. Testing of reinforcing may be waived in accordance with Section 1910A.2 when approved by the Engineer and DSA.
 - 2. Testing will be performed by an independent testing and inspecting agency in accordance with Section 01 4523, Testing and Inspection Services, and paid for by the Owner.
 - 3. Refer to Article FIELD QUALITY CONTROL in Part 3 of this Section for additional requirements.
 - 4. Cost of retests and coring due to low strength or defective concrete will be paid by the Owner and back-charged to the Contractor.
- H. Sieve analysis from testing laboratories identifying rock/sand percentages within the concrete mix; or class 2 aggregate base shall have the current Project name and

Project location identified on the report. Outdated analytical reports greater than 90 days old will not be accepted.

- Mockups: Provide on-site mockup panels for each type of exposed colored concrete flatwork showing texture and color before proceeding with finish to be used on this Project.
 - 1. Construct sample panels after review and approval of samples.
 - 2. Size: Minimum 5 feet square and have at least one longitudinal and one transverse joint unless a more specific note indicates otherwise on Drawings.
 - 3. Construct sample panels at location approved by Architect.
 - 4. Construct sample panels in ample time to allow for finishing and curing before requesting Architect to review.
 - 5. Follow procedures used on accepted samples.
 - 6. Include saw-cut and tooled joints to match method and appearance proposed for use in completed work.
 - 7. Prepare successive sample panels as required until finish, color, and appearance is approved by Architect.
 - 8. Do not remove sample panels until authorized in writing by the Architect and all concrete work has been approved.

1.9 DELIVERY, STORAGE AND HANDLING

- A. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.
- B. Store materials in protected, dry conditions off of ground and in areas so as to not interfere with the progress of the Work.
- C. Transport, store and handle in strict accordance with the manufacturer's written recommendations.
- D. Store cement in weather tight building, permitting easy inspection and identification. Protect from dampness. Lumpy or stale cement will be rejected.
- E. Aggregates: Prevent excessive segregation, or contamination with other materials or other sizes of aggregate. Use only one supply source for each aggregate stock pile.

1.10 FIELD CONDITIONS

- A. Make and be responsible for all field dimensions necessary for proper fitting, slopes, and completion of work. Report discrepancies to Architect before proceeding.
- B. Do not place concrete during rain without adequate protection.
- C. The Contractor shall conform to ACI 306R when mixing and placing concrete during cold weather. Provide sufficient protection when daily temperatures drop below 40 degrees F.

SITE CONCRETE SECTION 32 1600 21-1504

- D. The Contractor shall conform to ACI 305R when mixing and placing concrete during hot weather. When air temperature exceeds 100 degrees F adjust concrete mix with retarding admixture in design mix, and adequately test and take additional measures as directed by concrete supplier.
- E. The Contractor shall maintain access for vehicular and pedestrian traffic as required for other construction activities. Use temporary striping, flagmen, barricades, warning signs, and warning lights as required.
- F. Placing in hot weather: Comply with ACI 305R. Concrete shall be delivered, placed and finished in a sufficiently short period of time to avoid surface dry checking.
 - 1. Concrete shall not exceed 85 degrees F at time of placement.
 - 2. Concrete shall be kept wet continuously after tempering until implementation of curing compound procedure in accordance with this specification.
 - 3. Evaporation Retarder: Apply evaporation retarder to concrete surfaces if hot, dry, or windy conditions cause moisture loss approaching 0.2 pounds per square foot per hour, before and during finishing operations. Apply according to manufacturer's written instructions after placing, screeding, and bull floating or darbying concrete, but before float finishing.
- G. Placing in Cold Weather: Comply with ACI 306R. Protect from frost or freezing. No antifreeze admixtures are permitted.
 - 1. When placing concrete during freezing or near-freezing weather, mix shall have temperature of at least 50 degrees F but not more than 90 degrees F.
 - 2. Concrete shall be maintained at temperature of at least 50 degrees F for not less than 72 hours after placing or until it has thoroughly hardened.
 - 3. Provide necessary thermal coverings for any flat work exposed to freezing temperatures.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

- A. Contractor shall comply with requirements applicable to this Section for concrete materials, admixtures, bonding materials, curing materials, surface sealers and others as required.
- B. Concrete walking surfaces shall have a coefficient of friction not less than 0.30 and will be subject to testing to verify compliance as specified in Article FIELD QUALITY CONTROL.
 - 1. The coefficient of friction will be measured by California Test 342 before pavement is opened to public traffic, but not sooner than 7 days after concrete placement.
 - 2. Contractor shall notify the Architect and Project Inspector of pavement having a coefficient of friction less than 0.30.

C. Sustainable Design:

- 1. VOC emissions for field-applied adhesives, sealants, and sealant primers must comply with limits specified in Section 01 6116.
- 2. VOC emissions for field-applied paints and coatings must comply with limits specified in Section 01 6116.

2.2 FORMING MATERIALS

- A. Form Material: Steel, wood, or other suitable material of size and strength to resist movement during concrete placement and to retain horizontal and vertical alignment until removal. Use straight forms, free of distortion and defects. Use flexible spring steel forms or laminated boards to form radius bends as required. The forms shall be of a depth equal to the depth of curbing or sidewalk, and so designed as to permit secure fastening together at the tops. Coat forms with non-staining type coating that will not discolor or deface surface of concrete.
 - 1. Concrete Exposed to View: 5/8-inch minimum APA B-B Plyform, steel or "Sonotube" forms by Sunoco, 888-875-8754, or equal.
 - 2. Concrete Concealed from View: 5/8-inch minimum APA B-B Plyform, steel or 1 x 8 DF, Number 2 Grade or better.
- B. Form Ties: Snap off metal of fixed length, leaving no metal within 1-1/2 inches of surface and no fractures, spalls or other surface defects larger than 1 inch diameter; manufactured by Burke, Dayton Superior, or equal.
- C. Spreaders: Metal. Wood is not permitted.
- D. Form Coating: Coat forms with non-staining material that will not discolor or deface surface of concrete or leave any residue on concrete that would interfere with surface coating as approved by the Architect.
- E. Chamfer Strips: Rigid polyvinyl chloride, 3/4-inch x 3/4-inch, in maximum possible lengths, manufactured by Burke, Greenstreak, Vulco, or equal.

2.3 REINFORCING MATERIALS

- A. Reinforcement Bars: New billet steel deformed bars conforming to requirements of ASTM A615/A615M or ASTM A706/A706M; Grade 60.
 - 1. Bars for dowels installed through expansion joints or construction joints to existing sidewalks or concrete features shall be smooth or if deformed shall be sleeved on one end for slippage.
- B. Reinforcing Supports: Galvanized metal chairs or spacers or metal hangers, accurately placed 3 feet on center each way, staggered, with each support securely fastened to steel reinforcement in place.
 - 1. Bottom bars in footings may be supported with 3-inch concrete blocks with embedded wire ties.
 - 2. Concrete supports without wire ties will not be allowed.

2.4 CONCRETE MATERIALS

- A. Cement: Portland cement in accordance with ASTM C150/C150M, Type II, low alkali.
- B. Concrete Aggregates: Graded from coarse to fine in accordance with ASTM C33/C33M.
 - 1. Normal Weight Aggregates: Clean and free from deleterious coatings, clay balls, roots, and other extraneous materials, and in conformance with ASTM C33/C33M, except as otherwise specified. Combined grading shall meet limits of ASTM C33/C33M.
 - a. Size: Not be larger than one-fifth of the narrowest dimension between forms, or larger than three-fourths of the minimum clear spacing between reinforcing bars.
 - 2. Lightweight Aggregates:
 - a. General: Durable particles suitably processed, washed and screened without adherent coatings, free of materials with deleterious reactivity to alkali in cement, and conforming to ASTM C330/C330M.
 - b. Fine aggregate shall be natural sand, or sand prepared from stone or gravel, with grains free of silt, loam and clay.
- C. Water: Potable, clean, and in accordance with ASTM C94/C94M, free from injurious amounts of oil, acids, alkalis, salts, scale, organic materials or other deleterious matter, and in compliance with ACI 318 Section 26.4.1.3.
- D. Fly Ash: Western Fly Ash, conforming to ASTM C618 for Class N or Class F materials and in accordance with CBC Section 1903A.6.
 - 1. Class C is not permitted.
 - 2. Proportions: Not more than 15 percent (by weight) may be substituted for portland cement.

2.5 ADMIXTURES

- A. Water Reducing Admixture: Admixture to improve placing, reduce water cement ratio and ultimate shrinkage; "WRDA 64" by GCP Applied Technologies, or equal conforming to ASTM C494/C494M and ACI 318 Section 3.6.
 - 1. Water reducing admixture may be used subject to prior approval by the Architect, Engineer, and the Testing Lab.
 - 2. Proposed product and quantity shall be included in original design mix.
- B. Air-Entraining Admixture: "Daravair 1000" by GCP Applied Technologies or equal conforming to ASTM C260 and ACI 318, section 26.4.1.4.
 - 1. Proportion air entraining concrete to attain specified minimum 28-day compressive strength.
 - 2. Total air entrainment in concrete shall be not less than 4 percent or more than 6 percent of the volume of concrete.

C. Glare Reduction Colorant: Concentrated pigment dispersions designed to permanently color concrete; "Chromix L10 Base-Black" by Sika Corporation, or equal.

2.6 CURING MATERIALS

A. Clear Curing Compound: Water-based membrane-forming concrete curing compound in accordance with ASTM C309 and C1315; "Aqua Resin Cure Clear" by Burke CO, "1100" by W.R. Meadows, or equal.

2.7 ADDITIONAL MATERIALS AND COMPONENTS

- A. Concrete Bonding Agent: The following, or equal, conforming to ASTM C1059/C1059M.
 - 1. "Weld-Crete" by Larson Products Corporation, 800-633-6668.
 - 2. "Daraweld C" by GCP Applied Technologies, 877-423-6491.
- B. Patching Mortar: One-component, trowel applied, migrating-corrosion-inhibitor enhanced, polymer-modified, shrinkage-compensated, fiber reinforced, micro-silica enhanced, cementitious repair mortar for horizontal, vertical, and overhead applications; "Meadow-Crete GPS" by W.R. Meadows, or equal.
- C. Non-Shrink Grout: Premixed, non-metallic, no chlorides, non-staining and non-shrinking conforming to ASTM C1107/C1107M; "MasterFlow 713" by Master Builders Solutions, a division of BASF, 800-433-9517, or equal.
- D. Drainage Rock Base: 3/4-inch aggregate size conforming to Class 2 Aggregate Base as defined in Caltrans Standard Specifications Section 26, or equal clean free-draining gravel or crushed rock as recommended by the Geotechnical Engineer.
- E. Expansion Joint Material: Preformed 3/8-inch fiber material, with bituminous binder manufactured for use as concrete expansion joint material and conforming to ASTM D1751 and approved by Architect.
 - 1. Furnish joint fillers in one-piece lengths for full width being placed, wherever possible. Where more than one length is required, lace or clip joint-filler sections together.
- F. Joint Sealant for Expansion Joints in Concrete: Weather and UV resistant, single component, cold applied silicone sealant, Type S, conforming to ASTM D5893/D5893M; ASTM C920, Grade P, Class 25, Use T.
 - 1. Self-Leveling: "DOWSIL 890-SL Silicone Joint Sealant" by Dow Chemical Company, or equal.
 - 2. At Slopes Exceeding 5 Percent: Non-sagging; "DOWSIL 888 Silicone Joint Sealant" by Dow Chemical Company, or equal.
 - 3. Color: As standard with manufacturer.
- G. Pre-Formed Plastic Expansion Joint Caps: Polystyrene, with removable tops; "Snap Cap" by W. R. Meadows, Tex-Trude expansion caps, or equal.

- H. Truncated Domes: Vitrified Polymer Composite (VPC) cast-in-place detectable/tactile warning surface tiles complying with Americans with Disabilities Act (ADA) and the California Code of Regulations (CCR) Title 24, Part 2, Chapter 11B; "Armor-Tile", "Access Tile Tactile Systems," or equal.
 - 1. Color: Shall be yellow and approximate 33538 of GSA/SAE AMS-STD-595A in accordance with CBC Section 11B-705.1.1.3.1.

2.8 CONCRETE DESIGN AND CLASS

- A. Designed Strength and Classes of Concrete: The following mixes are not applicable to concrete items exceeding 4 feet in height above the adjacent grade.
 - 1. Class "B": Concrete shall have 1 inch maximum size aggregate, shall have 3000 pounds per square inch minimum at 28 day strength with a maximum water to cementitious ratio no greater than 0.50.
 - a. Location of Use: Exterior slabs, including walks, vehicular paved surfaces, manhole bases, poured-in-place drop inlets, curbs, valley gutters, curb and gutter, and other concrete of like nature.
 - 2. Class "D" concrete of 1 inch maximum size aggregate shall have 3500 pounds per square inch 28 day strength with a maximum water to cementitious materials ratio of 0.55.
 - a. Location of Use: Footings and retaining walls not attached to buildings, and planter walls, monument signs, and other site concrete not described for use in Class "B".
- B. Slump Limits: Provide concrete, at point of final discharge of proper consistency as tested in accordance with ASTM C143/C143M with slumps of 4 inches, plus or minus 1 inch.
- C. Mix Design: Concrete shall be designed for strength in accordance with provisions of CBC Section 1905A.
 - 1. Should the Contractor desire to pump concrete, a modified mix design will need to be submitted for review.
 - 2. Fly ash may be used in concrete to improve workability in amounts up to 15 percent of the total cementitious weight.
- D. Air Entrainment: Provide at concrete paving / flatwork, including concrete ramps and stairs in accordance with local jurisdiction minimum requirements, but no less than 3 percent of the volume of concrete.

E. Glare Reduction Additive:

1. General:

- a. Provide at exterior concrete slabs, walks, ramps, stairs, including bleachers, and other exposed flatwork to eliminate glare.
- b. Omit glare reduction colorant where color hardener, integral color, and stain treatment of concrete are scheduled.

- 2. Quantity: As required to match approved sample but not exceed 2 pounds of colorant per cubic yard of concrete.
- 3. Add colorant to mix in accordance with manufacturer's printed instructions.

F. Coloring Agent:

- 1. Quantity: Add pigment as required to result in hardened concrete color consistent with approved sample but not exceeding maximum dosage per sack of cement as recommended by manufacturer based on total cementitious materials of mix design.
- 2. Add pre-mixed colorant bags to mix in accordance with manufacturer's printed instructions.

2.9 MIXING OF CONCRETE

- A. Conform to requirements of CBC Chapter 19A.
- B. Concrete shall be mixed until there is uniform distribution of material and mass is uniform and homogenous; mixer must be discharged completely before the mixer is recharged.
- C. Concrete shall be Ready-Mixed Concrete: Mix and deliver in accordance with the requirements set forth in ASTM C94/C94M and ACI 301. Batch Plant inspection may be waived in accordance with CBC Section 1705A.3.3, when approved by the Project Engineer and DSA.
 - 1. Furnish batch certificates for each batch discharged and used in the work.
 - 2. Approved Testing Laboratory shall check the first batching at the start of the work and furnish mix proportions to the Licensed Weighmaster.
 - 3. Licensed Weighmaster shall identify materials as to quantity and to certify to each load by ticket.
 - 4. Delivery tickets are to accompany each truck and shall be kept in the job superintendent's file. Delivery tickets must indicate the following information or be subject to rejection:
 - a. Name of Project.
 - b. Supplier of concrete.
 - c. Truck identity and ticket serial number.
 - d. Date of delivery.
 - e. Brand of cement.
 - f. Cement content.
 - g. Strength classification.
 - h. Batching time.
 - i. Point of deposit.
 - j. Total amount of water.
 - k. Weight of aggregate.
 - I. Daily temperature.

SITE CONCRETE SECTION 32 1600 21-1504

- m. Number of cubic yards in load.
- Admixture content.
- Name of Contractor.
- p. Name of driver.
- q. Time loaded and first mixing of concrete.
- r. Reading of revolution counter.
- s. Color additive.
- 5. Ticket shall be transmitted to Project Inspector by truck driver with load identified thereon. Project Inspector will not accept load without load ticket identifying mix and will keep daily record of pours, identifying each truck, its load and time of receipt, and will transmit two copies of record to DSA.
- 6. At end of project, Weighmaster shall furnish affidavit to DSA on form satisfactory to DSA, certifying that all concrete furnished is in conformance with proportions established by mix designs.
- 7. Placement of concrete shall occur as rapidly as possible after batching and in a manner which will assure that the required quality of the concrete is maintained. In no case may concrete be placed more than 90 minutes from batch time.
 - a. When air temperature is between 85 and 90 degrees F, reduce maximum batching to discharge time from 90 minutes to 75 minutes.
 - b. When air temperature is above 90 degrees F, reduce maximum batching to discharge time to 60 minutes.
- 8. Water may be added to the mix only if neither the maximum permissible water-cement ratio nor the maximum slump is exceeded.
 - a. The quantity of water used for each batch shall be accurately measured.
 - b. In no case shall more than 10 gallons of water be added to a full 9-yard load, or 1 gallon per yard on remaining concrete within the drum, providing load tag indicates at time of mixing at plant an allowance for additional water.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Confirm general layout, grade, and joint pattern layout with the Architect prior to placing concrete.
- B. Verify that gradients and elevations of the base are correct, and that the base is dry.
- C. Contractor shall report in writing to the Architect prevailing conditions that will adversely affect satisfactory execution of the work of this Section.
 - 1. Do not proceed with work until unsatisfactory conditions have been corrected.
- D. Forms and reinforcements are subject to approval by the Project Inspector as specified in Article FIELD QUALITY CONTROL.

3.2 PREPARATION

- A. Remove frost, water, and other foreign materials from form surfaces, reinforcement, and embedded items against which concrete will be placed.
- B. When the ambient temperature necessitates the use of cold or hot weather concreting, make provisions in advance of concrete placement.
- C. Before placing concrete, clean tools and equipment, and remove debris from areas to receive concrete.
- D. Clean reinforcing and other embedded items of coatings, oil, mud and soil that may impair bond with concrete.
- E. Slab-On-Grade: After subgrade has been approved by Geotechnical Engineer, install specified drainage rock base material to thickness shown. Rock base shall be implemented and compacted in accordance with the Geotechnical Report and recommendations of the Geotechnical Engineer.

3.3 INSTALLATION – FORMWORK

- A. Form material shall be straight, true, sound and able to withstand deformation due to loading and effects of moist curing. Materials which have warped or delaminated, or require more than minor patching of contact surfaces, shall not be reused.
- B. Build forms to shapes, lines, grades and dimensions indicated. Construct formwork to maintain tolerances required by ACI 301. Forms shall be substantial, tight to prevent leakage of concrete, and properly braced and tied together to maintain position and shape. Butt joints tightly and locate on solid backing. Chamfer corners where indicated. Form bevels, grooves and recesses to neat, straight lines. Construct forms for easy removal without hammering, wedging or prying against concrete.
- C. Space clamps, ties, hangers and other form accessories so that working capacities are not exceeded by loads imposed from concrete or concreting operations.
- D. Build openings into vertical forms at regular intervals if necessary to facilitate concrete placement, and at bottoms of forms to permit cleaning and inspection.
- E. Build in securely braced temporary bulkheads, keyed as required, at planned locations of construction joints.
- F. Before placement of reinforcing steel, coat faces of all forms to prevent absorption of moisture from concrete and to facilitate removal of forms. Apply specified material in conformance with manufacturer's written directions.
 - 1. Seal all cut edges.
 - 2. Before re-using form material, inspect, clean thoroughly, and recoat.
- G. Slope tie-wires downward to outside of wall.
- H. Brace, anchor and support all cast-in items to prevent displacement or distortion.

SITE CONCRETE SECTION 32 1600 21-1504

- I. During and immediately after concrete placing, tighten forms, posts and shores. Readjust to maintain grades, levels and camber.
- J. Concrete Paving, Curbs, Curb and Gutters, Ramps:
 - 1. Expansion Joints: Install at locations indicated, and so that maximum distance between joints is 20 feet for exterior concrete unless otherwise shown. Expansion joint material shall be full depth of concrete section. Recess for snap cap and sealant when required.
 - Curbs, Valley Gutter, and Curb & Gutter: Install expansion joints at 60 feet on center, except when placing adjacent to concrete walks, the expansion joints shall align with the expansion joints shown for the concrete walks. Expansion joint material shall be full depth of concrete section. Recess for snap cap and sealant when required.
 - 3. Isolation Joints: 3/8-inch felt between walls and exterior slabs or walks so that paved areas are isolated from all vertical features, unless specifically noted otherwise on plans.
 - 4. Exterior Concrete Paving: Install expansion joints at 20 feet on center maximum, both directions, unless shown otherwise on plans.
 - 5. Ramps: Whether shown or not, all ramps shall have control joints and expansion joints.
 - a. Control joints on ramps shall be aligned and placed in between the vertical posts for the handrails. The curbs, if required shall have control joints that align with the handrail posts.
 - b. Expansion joints shall be placed at the upper, intermediate, and bottom landings.
- K. Inspection: Refer to Article FIELD QUALITY CONTROL.

3.4 INSTALLATION – REINFORCING

- A. General: Reinforcing shall be accurately placed at locations indicated on the drawings within required tolerances and providing required clearances. Reinforcement shall be secured prior to placement of concrete such that tolerances and clearances are maintained. Coverage shall be in accordance with Section 1907A.7 of the CBC.
 - 1. Reinforcement must be in place before concreting is begun.
 - 2. Keep a person on the job to maintain position of reinforcing as concrete is placed.
 - 3. All expansion and construction joints in concrete shall have dowels of size and spacing as shown on the Drawings, or as approved by Architect.
 - 4. Give notice whenever pipes, conduits, sleeves, and other construction interferes with placement; obtain method of procedure to resolve interferences.
- B. Additional reinforcing steel shall be placed around all utility boxes, valve boxes, manhole frames and covers that are located within the concrete placements.

- 1. The bars shall be placed so that there will be a minimum of 1-1/2-inch clearance and a maximum of 3-inch clearance. The reinforcing steel shall be placed middepth of concrete slab.
- C. At right angles or intersections of concrete walks, additional 2 feet x 2 feet #5, 90 degree bars shall be added at all inside corners for additional crack control. The bars shall be placed 2 inches from concrete forms and supports, at mid-depth of slab.
- D. Reinforcing steel shall be adequately supported by approved devices on centers close enough to prevent any sagging.

E. Placing Tolerances:

- 1. In accordance with ACI 301 or CRSI/WCRSI Recommended Practice for Placing Reinforcing Bars, unless otherwise shown.
- 2. Clear distance between parallel bars in a layer shall be no less than 1 inch, the maximum bar diameter shall not exceed 1-1/2 times the maximum size of coarse aggregate.

F. Splices:

- 1. General: Unless otherwise shown on drawings, splice top reinforcing at midspan between supports, splice bottom reinforcing at supports, and stagger splices. Bar laps shall be wired together. Reinforcing steel laps shall be as follows:
 - a. Length of Lap Splices in Concrete:
 - 1) No. 4 bar: 24 inches minimum.
 - 2) No. 5 Bar: Not less than 62 bar diameters.
 - 3) No. 6 Bar: 56 inches minimum.
 - 4) No. 7 Bars and Larger: Not less than 93 bar diameters.
 - b. All splices shall be staggered at 5 feet minimum from adjacent splices.
- G. Inspection: Refer to Article FIELD QUALITY CONTROL.

3.5 PLACING OF CONCRETE – GENERAL

- A. Adjacent finish surfaces shall be protected at all times during the concrete pour and finishing. Verify that all formwork is tight and leak-proof before concrete is poured. Finish work defaced during the concrete pour and finishing shall be replaced at no extra cost to Owner.
- B. Remove wood chips, sawdust, dirt, loose concrete and other debris just before concrete is to be poured. Use compressed air for inaccessible areas. Remove all standing water from excavations.
- C. Transport concrete from mixer to place of final deposit as rapidly as practicable by methods which will prevent separation or loss of ingredients. Deposit as close as practicable in final position to avoid re-handling or flowing. Partially hardened concrete must not be deposited in work. Concrete shall not be wheeled directly on top of reinforcing steel.

- D. Keep excavations free of standing water, but moisture condition sub-grade before concrete placement.
- E. Placing: Once started, continue concrete pour continuously until section is complete between predetermined construction joints. Prevent splashing of concrete onto adjacent forms or reinforcement and remove such accumulation of hardened or partially hardened concrete from forms or reinforcement before work proceeds in that area. Free fall of concrete shall not to exceed 4'-0" in height. If necessary, provide lower openings in forms to inject concrete and to reduce fall height.
- F. Remove form spreaders as placing of concrete progresses.
- G. Place footings as monolithic and in one continuous pour.
- H. Compacting: Concrete shall be compacted by mechanical vibrators.
 - 1. Concrete shall be thoroughly worked around reinforcement and embedded fixtures and into corners of forms.
 - 2. Vibrating shall not be applied to concrete which has already begun to initially set or be continued so long as to cause segregation of materials.

3.6 REMOVAL OF FORMS

- A. Remove without damage to concrete surfaces.
 - 1. Sequence and timing of form removal shall insure complete safety of concrete structure.
 - 2. Forms shall remain in place for not less than the following periods of time. These periods represent cumulative number of days during which temperature of air in contact with concrete is 60 degrees F and above.
 - a. Vertical Forms of Foundations, Walls and All Other Forms Not Covered Below: 5 days.
 - b. Concrete Paving Edge Screeds or Forms: 7 days.
 - 3. Concrete shall not be subjected to superimposed loads (structure or construction equipment) until it has attained its full design strength and not for a period of at least 21 days after placing. Concrete systems shall not be subjected to construction loads in excess of design loads.
- B. Patching: Install specified patching mortar per manufacturer's recommendations. Repairs to defective concrete which affect the strength of any structural concrete member or component are subject to approval by the architect and DSA.

3.7 CONCRETE PAVING

- A. Concrete paving shall be formed and finished to required line and grades true and flat with a maximum tolerance of 1/8-inch in 10 feet for flatness and to slopes indicated.
- B. Concrete vibrator shall be used to assist concrete placement. Contractor shall have spare concrete vibrator on site during concrete placement.

- C. Thoroughly water and soak the subgrade of exterior concrete paving, curbs, curb and gutters, with multiple daily waterings for at least three days or as required to achieve required moisture content prior to the concrete pour in order to place the subgrade soils in full expansion.
 - 1. Provide damming as required to keep standing water within the formed area and to allow for proper saturation and full expansion of the subgrade soils.
 - 2. Remove standing water before concrete placement.

D. Construction Joints:

- Keep exposed concrete face of construction joints continuously moist from time
 of initial set until placing of concrete; thoroughly clean contact surface by
 chipping entire surface not earlier than 5 days after initial pour to expose clean
 hard aggregate solidly embedded, or by approved method that will assure equal
 bond, such as green cutting.
- 2. If contact surface becomes contaminated with soil, sawdust or other foreign matter, clean entire surface and re-chip entire surface to assure proper adhesion.

3.8 FINISHING

- A. Concrete Paving: Finish surface as required by ACI 302.1R using manual and vibrating screeds to place concrete level and smooth.
 - 1. Under no circumstances shall water be added to the top surface of freshly placed concrete.
 - 2. Use "jitterbugs" or other special tools designed for the purpose of forcing the course aggregate below the surface leaving a thick layer of mortar 1 inch in thickness.
 - 3. After tamping the concrete, wood float surface to a true and even plane.
 - 4. After floating with a wood bull float, make 2 passes with a steel Fresno trowel to start sealing the concrete surface.
 - 5. While concrete is still wet but sufficiently hardened to bear a persons' weight on knee boards, start troweling with a steel hand trowel or a machine trowel in larger areas. Use sufficient pressure to bring moisture to surface.
 - 6. After surface moisture has disappeared, finish concrete utilizing steel, hand or power trowel.
 - 7. Completed surface shall be free from trowel marks, depressions, ridges or other blemishes. Tolerance for flatness shall be 1/8-inch in 10 feet.
 - 8. Provide final finish as follows, unless otherwise indicated:
 - a. Medium Broom Finish: Typical finish to be used at all exterior walks, stairs and ramps. Brooming direction shall run perpendicular to slope to form non-slip surface.
- B. Curb Finish: Steel trowel.
- C. Joints and Edges:

SITE CONCRETE SECTION 32 1600 21-1504

- 1. Mark-off exposed joints, where indicated, with 1/4-inch radius x 1 inch deep jointer or edging tool. Joints shall be clean, cut straight and parallel or square with respect to concrete walk edge.
- 2. Tool edges of control joints, walk edges, and wherever concrete walk adjoins other material or vertical surfaces. Expansion joints shall be constructed as detailed on plans.
- 3. The expansion joints shall be full depth as shown in the Drawings. Failure to do so will result in non-compliance and shall be immediately machine cut by the Contractor at its expense.
- D. Exposed Concrete Surface Finishing, Not Including Top Surface of Flatwork:
 - 1. Remove fins and rough spots immediately following removal of forms from concrete which is to be left exposed. Damaged and irregular surfaces and holes left by form clamps and sleeves shall be patched with grout.
 - 2. Tie wires are to be removed to below exposed surface and holes pointed up with neat cement paste similar to procedure noted under "After patching" in subparagraph below.
 - a. Removal of tie wires shall extend to distance of 2 inches below established grade lines.
 - b. Ends of tie wires shall be cut off flush at other, unexposed locations.
 - c. Care shall be taken during pointing to match adjacent finishes of exposed concrete surface.
 - 3. After patching, concrete that is to remain exposed shall be sacked with a grout mixture of 1-part cement, 1-1/2-parts fine sand and sufficient water to produce a consistency of thick paint.
 - a. After first wetting the concrete surface, apply mixture with a brush and immediately float entire surface vigorously using a wood float. Keep damp during periods of hot weather.
 - b. When set, excess grout shall be scraped from wall with edge of steel trowel, allowed to set for a time, then wiped or rubbed with dry burlap.
 - c. Entire finishing operation of an area shall be completed on the same day. This treatment shall be carried to 4 inches below grade, and all patching and sacking shall be done immediately upon removal of the forms.
- E. Stair Treads and Risers: Tool exterior stair tread and landing nosings to comply with ADA and CBC accessibility requirements and as detailed.
 - 1. Nosings shall contain no pockets, voids or spalls. Patching is not allowed. Damaged nosings shall be replaced.

3.9 CURING

A. Formed Concrete:

1. Keep forms and top on concrete between forms continuously wet until removal of forms, 7 days minimum.

- 2. Maintain exposed concrete in a continuous wet condition for 14 days following removal of forms.
- B. Concrete Paving, Curb, Curb and Gutter, Valley Gutter:
 - 1. Cure utilizing curing compound. If applicable, the Contractor shall verify that the approved curing compound is compatible with the approved colorant system.
 - 2. Curing compound shall be applied in a wet puddling application. Spotty applications shall be reason for rejection and possibly concrete removal and replacement at the contractor's expense with no compensation from the Owner.
- C. No curing compound shall be applied to areas scheduled to receive resilient track surface including, curbs, ramps, runways, and similar items.

3.10 DEFECTIVE CONCRETE

A. General:

- Determination of defective concrete shall be made by the Architect or Engineer whose opinion shall be final in identifying areas to be replaced, repaired or patched.
- 2. As directed by Architect, cut out and replace defective concrete.
 - Defective concrete shall be removed from the site.
 - b. No patching is to be done until surfaces have been examined by Architect and permission to begin patching has been provided.
 - c. Permission to patch an area shall not be considered waiver of right by the Owner to require removal of defective work, if patching does not, in opinion of Architect, satisfactorily restore quality and appearance of surface.
 - d. Remove and replace concrete if repair to an acceptable condition is not feasible.

B. Defective Concrete Is:

- 1. Concrete that does not match the approved mix design for the given installation type.
- 2. Concrete not meeting specified 28-day strength.
- 3. Concrete which contains rock pockets, voids, spalls, transverse cracks, exposed reinforcing, or other such defects which adversely affect strength, durability or appearance.
- 4. Concrete which is incorrectly formed, out of alignment or not plumb or level, or outside of the maximum tolerance for flatness and slopes indicated.
- 5. Concrete containing embedded wood or debris.
- 6. Concrete having large or excessive patched voids which were not completed under Architect's direction.
- 7. Concrete not containing required embedded items.
- 8. Concrete with excessive shrinkage, transverse cracking, crazing, curling; or defective finish.

- 9. Concrete that is unsuitable for placement or has set in truck drum for longer than 90 minutes from the time it was batched.
- Concrete where expansion joint filler that is not isolating the full depth of the concrete section, and not recessed as required for backer rod and sealant where required.
- 11. Concrete that is excessively wet or excessively dry and will not meet the minimum or maximum slump required per mix design.
- 12. Finished concrete with oil stains from equipment use, and or rust spots that cannot be removed.
- 13. Concrete with control joints (weakened planed joints) that do not meet the required minimum depth shown on the drawings.
- 14. Concrete not meeting slip-resistance requirements.
- C. Flatwork: The Owner reserves the right to survey the flatwork, to determine if flatwork is outside of the maximum tolerance for flatness and slopes as indicated.
 - 1. If the flatwork is found to be out of tolerance, then the Contractor is required to replace concrete at no additional expense to the Owner.
 - 2. Determination of flatwork flatness, surveying and remedial work must be completed far enough in advance so that the project schedule is maintained, delays are avoided, and the new flatwork or flatwork repairs are properly cured.
 - 3. The Contractor will be responsible for reimbursing the Owner for costs associated with re-surveying to verify compliance of work remediated by the Contractor.

3.11 INSTALLATION OF TRUNCATED DOMES

A. General:

- 1. Comply with manufacturer's installation instructions as summarized in the Article.
- 2. Verify concrete to receive embedded truncated dome tiles is within the slump range recommended by tile manufacturer to permit placement without mix causing tiles to float.
- 3. Maintain factory-installed plastic sheeting during installation process to prevent splashing of concrete onto the finished surface of the tile.
- 4. If necessary to ensure that adjacent tiles are flush to each other during the installation process, bolt tiles together using 1/4 inch or equivalent hardware or other methods recommended by tile manufacturer.
- B. The concrete shall be poured and finished true and smooth to the required dimensions and slope prior to the tile placement. Immediately after finishing concrete, the electronic level should be used to check that the required slope is achieved.

C. Installing Tiles:

1. Install tiles into fresh concrete using techniques that will eliminate air voids under the tile.

- a. Holes in the tile perimeter allow air to escape during the installation process.
- b. Allow concrete to flow through holes in embedment flanges on underside of tile to lock tile solidly into the cured concrete.
- 2. Tiles shall be placed true and square.
- 3. Tiles shall be tamped or vibrated into the fresh concrete to ensure that the field level of the tile is flush to the adjacent concrete surface to permit proper water drainage and eliminate tripping hazards between adjacent finishes.
- D. Immediately after placement, the tile elevation shall be checked with the elevation and slope permitting water drainage, to ensure that the field surface of the tile is flush with the surrounding concrete, and that no ponding is possible on the tile.
- E. While concrete is still workable, a 3/8 inch radius edging tool shall be used to create a finished edge of concrete, then a steel trowel shall be used to finish the concrete around the tile's perimeter, flush to the field level of the tile.
- F. If necessary, adjust tile before the concrete sets. Use two suitable weights of 25 pounds each if necessary to ensure solid contact of the underside of tile to concrete.
- G. During and after the tile installation and the concrete curing stage, prohibit walking, leaning, or placing of other external forces on tile that may rock the tile causing a void between the underside of tile and concrete.
- H. After concrete is cured, remove factory-applied protective plastic wrap and concrete that may have bled under the plastic following procedures recommended by the tile manufacturer.
- I. Protect tiles after installation and during remainder of construction period.
- J. Prior to Owner acceptance, clean tiles complying with manufacturer's procedures for cleaning of tile surface.

3.12 SEALANT

- A. Apply sealant in compliance with manufacturer's instructions, using hand guns or pressure equipment with proper nozzle size, on clean, dry, properly prepared substrates.
- B. Force sealants into joint against sides of joint to make uniform. Avoid pulling of the sealant from the sides. Fill sealant space completely with sealant.
- C. Finished joints shall be straight, uniform, smooth, and neatly finished.
- D. Remove any excess sealant from adjacent surfaces of joints utilizing the manufacturer's recommended solvent and cleaning processes. Leave the work in a neat, clean condition.

3.13 FIELD QUALITY CONTROL

A. Inspection of Forms and Reinforcing:

SITE CONCRETE SECTION 32 1600 21-1504

- 1. Approval of forms and reinforcing steel must be received from Project Inspector prior to pouring concrete.
- 2. Notice of readiness to place first pour shall be given to Project Inspector, DSA, Architect, and Engineer not less than 48 hours prior to placement of concrete to allow for inspection.
- 3. Pouring of concrete shall not proceed prior to completing requested adjustments to forms and reinforcing and without approval of Project Inspector.

B. Testing of Concrete:

- 1. Frequency and Samples for Testing:
 - a. Four identical cylinder samples for strength tests of each class of concrete placed each day shall be taken not less than once a day, or not less than once for each 50 cubic yards of concrete, or not less than once for each 2,000 square feet of surface area for slabs or walls.
 - b. In addition, samples for strength tests for each class of concrete shall be taken for seven-day tests at the beginning of the concrete work or whenever the mix or aggregate is changed.

2. Testing

a. Slump: Each truck's concrete shall be tested for slump before concrete is placed.

b. Strength:

- Tests for strength will be conducted by Testing Agency on one cylinder at 7 days and two cylinders at 28 days. The fourth remaining cylinder will be available for testing at 56 days if the 28-day cylinder test results do not meet the required design strength.
- On a given project, if the total volume of concrete is such that the frequency of specified testing would provide less than five strength tests for a given class of concrete, tests shall be made from at least five randomly selected batches or from each batch if fewer than five batches are used.
- C. Slip-Resistance Testing: Owner's Testing Agency will perform testing on flatwork to verify compliance with specified slip-resistance.
 - 1. The coefficient of friction will be measured by California Test 342 before pavement is opened to public traffic, but not sooner than 7 days after concrete placement
 - 2. Where paving is determined to have a coefficient of friction less than 0.30, Contractor is to repair and/or replace these surfaces at no cost to Owner.

3.14 CLEANING

- A. Upon completion of work of this Section promptly remove from the working area all scraps, debris and surplus material of this Section.
- B. Clean excess material from surface of all concrete walks and utility structures.
- C. Power wash concrete surfaces to remove stains, dried mud, tire marks, and rust spots.

D. Comply with any additional requirements of additive manufacturer for colored concrete.

3.15 PROTECTION

- A. Graffiti-resistant Coating:
 - Surface Preparation: Prepare concrete surface to receive graffiti-resistant coating specified in Section 09 9623, Graffiti-Resistant Coatings, where indicated.
 - 2. Concrete must be clean, dry, and free of efflorescence and dust.
- B. Protect work and materials of this Section prior to and during installation, and protect the installed work and materials of other trades.
- C. In the event of damage during construction, make all repairs and replacements necessary to the approval of the Architect, at no additional cost to the Owner.

END OF SECTION

PART 1 - GENERAL

1.1 SUMMARY

- A. Section Includes:
 - 1. All-welded decorative metal fences and gates.
 - 2. Gate hardware.
 - 3. Shop finishing.

1.2 RELATED REQUIREMENTS

- A. Section 01 6116, Volatile Organic Compound (VOC) Restrictions; for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- B. Section 32 1600, Site Concrete.

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. ASTM International (ASTM):
 - 1. A 500/A 500M: Standard Specification for Cold-Formed Welded Carbon and Seamless Carbon Steel Structural Tubing in Rounds and Shapes.
 - 2. A 513/A 513M: Standard Specification for Electric-Resistance-Welded Carbon and Alloy Steel Mechanical Tubing.
 - 3. A 123: Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.
 - 4. A 153: Standard Specification for Zinc Coating (Hot-Dip) on Iron and Steel Hardware.
 - 5. A 384: Practice for Safeguarding Against Warpage and Distortion During Hot-Dip Galvanizing of Steel Assemblies.
 - 6. D 6386: Practice for Preparation of Zinc (Hot-Dip Galvanized) Coated Iron and Steel product and Hardware Surfaces for Painting.
 - 7. D 7396: Standard Guide for Preparation of New, Continuous Zinc-Coated (Galvanized) Steel Surfaces for Painting.

1.4 ADMINISTRATIVE REQUIREMENTS

A. Submittal Procedures:

- 1. Action Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
- 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
- B. Coordinate installation of anchorages. Furnish setting drawings, diagrams, templates, and directions for installing anchorages, including sleeves, inserts, anchor bolts, and items with integral anchors, to be embedded in concrete.

1.5 ACTION SUBMITTALS

- A. Shop Drawings: Submit showing all parts, connections and anchorages, adjacent materials, fully dimensioned and noted.
 - 1. Indicate plan layout, spacing of components, locations and sizes of support structures, post foundation dimensions, hardware anchorage and schedule of components.
 - 2. Provide evidence that mounting plates, lock boxes, and similar items have been sized, located and coordinated properly with the finish hardware supplier and installer where applicable.
- B. Product Data: Submit list and complete descriptive data of all products and finishes proposed for use. Include manufacturer's specifications, published warranty or guarantee, installation instructions, and maintenance instructions.
- C. Samples: Typical frame member, 12 inches long, finished as specified.

1.6 INFORMATION SUBMITTALS

- A. Sample of manufacturer's warranty.
- B. Sustainable Design:
 - 1. General:
 - a. Submit information necessary to establish and document compliance with the California Green Building Standards Code.
 - b. Sustainable design submittals are in addition to other submittals.
 - 2. The following information shall be provided:
 - a. Paints and Coatings: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.

1.7 CLOSEOUT SUBMITTALS

A. Warranty/Guarantee: Submit executed warranty and extended Contractor guarantee.

1.8 QUALITY ASSURANCE

- A. Use only new materials and products.
- B. Use materials and products of one manufacturer whenever possible.

C. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

1.9 FIELD CONDITIONS

A. Make and be responsible for all field dimensions necessary for proper fitting and completion of work. Report any discrepancies to Architect before proceeding.

1.10 WARRANTY AND GUARANTEE

A. Manufacturer:

- 1. In addition to the Contractor's and Subcontractor's Guarantee, furnish Owner with manufacturer's fully executed written commercial warranty for specified coating materials against defects and the following:
 - a. Manufacturer's available warranty for specified hardware.
- Contractor shall be responsible to assure manufacturer's requirements for access and inspection of the work, surface preparation, and coating application are performed to meet coating manufacturer's requirements for providing specified warranty.
- B. Contractor: In addition to its standard Guarantee under the Contract, furnish Owner a special extended written 5-year guarantee, cosigned by installer, agreeing to repair or replace decorative metal fences and gates that fails to perform as required within guarantee period as a result of failure of materials or installation workmanship at no additional cost to the Owner.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

A. General:

- 1. Use new components free from defects affecting service and appearance.
- 2. Sizes specified or shown shall be considered minimum size.
- 3. If modifications to designs indicated are proposed in order to meet code requirements, indicate them as such on shop drawing submittals. Work with Architect to arrive at an acceptable design that is sufficiently similar to the design indicated.
- B. Structural Performance of Railing Assemblies and Guardrails:
 - 1. Top Rails of Guards:
 - a. Uniform load of 50 pounds/foot applied in any direction.
 - b. Concentrated load of 200 pounds applied in any direction.
 - Uniform and concentrated loads need not be assumed to act concurrently.
 - 2. Infill of Guards:

- a. Concentrated load of 50 pounds applied horizontally on an area of 1 square foot.
- b. Infill load and other loads need not be assumed to act concurrently.

C. Industry Standards:

1. Comply with "Metal Rail Manual" of National Ornamental and Miscellaneous Metals Association (NOMMA).

D. Sustainable Design:

1. VOC emissions for field-applied paints and coatings must comply with limits specified in Section 01 6116.

2.2 DECORATIVE METAL FENCING

A. General:

- 1. Assembly: Fence shall be all-welded construction. No mechanical fasteners or connectors are permitted.
- 2. Tubing for Fence Pickets, Rails and Posts: ASTM A 500 or ASTM A 513, hotrolled or cold-rolled steel tubing depending on size.
 - a. Steel tubing for fence pickets shall have a minimum yield strength of 33 ksi. All other tubing to be 50 ksi.
 - b. Steel shall not be pre-galvanized or pre-coated prior to the hot-dip preparation and coating process.
 - c. Steel shall be hot dipped galvanized before fabrication as specified.
- B. Fence Components: Deliver to the project site prefabricated.
 - 1. Fence panels and gate assemblies shall be shop welded and delivered to the project site prefabricated. Shop coat weld joints, scratches and other areas where hot-dip galvanized coating was removed or damaged with specified galvanized metal repair primer.
 - 2. Pickets: 3/4-inch square, 16-gauge tubular steel, spaced as indicated on the drawings.
 - 3. Gate Frame: 1-1/2-inch square, 14-gauge tubular steel, spaced as indicated on the drawings. For gate leafs over 6'-0" and less than 12'-0" wide, increase gate frame to 2-inch square.
 - 4. Intermediate Rail: 1-1/2-inch x 3/4 inch, 14-gauge tubular steel, spaced as indicated on the drawings.
 - 5. Line Posts & Roller Posts: 3-inch square, 11-gauge tubular steel.
 - 6. Corner and End Posts: 4-inch square, 11-gauge tubular steel.
 - 7. Gate Posts: 4-inch square, 11-guage tubular steel where gate leaf is 6'-0" or less in width. Use 6-inch square, 3/8"-thick wall, tubular steel post where gate leaf width is greater than 6'-0" and less than 12'-0".

C. Fittings and Accessories:

- 1. General: Provide all necessary fittings and accessories as required for a complete fence system.
- 2. Post Caps: Pressed steel, pyramid style as supplied by King Architectural Metals or approved equal. Weld all around to top of post and hot-dip as one assembly.
- 3. Security Screen: 16-gauge, galvanized and perforated steel sheet with 1/8-inch holes staggered at 3/16-inches on center. Provide as a part of the fabricated gate or fence panel assembly, hot-dip galvanized.

2.3 DECORATIVE METAL GATES

A. Fabrication and Components:

- 1. Swing and rolling gates shall be fabricated with the same components as the fence panel assembly.
- 2. Kick Plates: 12 gauge; 10-inches high x gate width.
- 3. Exit Device Mounting Plate: 12 gauge galvanized steel sheet x gate width
- 4. Plate Closure Rail: 16-gauge tubular steel., 1/2 inch square,
- 5. Astragal: 10 gauge galvanized steel sheet.

B. Gate Hardware:

- 1. Lock Box at Lever Hardware: 14 gauge steel. Size and backset as required by specified lockset and as indicated on Drawings.
- 2. Hinges:
 - a. Gate Leafs 6'-0" Wide or Less: 1-1/2-pair, No. 1-3030, extra heavy duty butt hinges by King Architectural Metals or equal.
 - b. Gate Leafs over 6'-0" and Less than 12'-0" Wide: 1-1/2-pair, No. 1-4040, extra heavy duty butt hinges by King Architectural Metals or equal.
- 3. Spring Gate Closer: No. 30-12 by King Architectural Metals or equal.
 - a. Closing speed shall comply with the CBC and ADA Guidelines for Accessible Design, section 404.2.8.2.
 - b. Provide at all gates including pool gates and other locations as noted.
- 4. Lockable Cane Bolt: No. 30-6000-MCB by King Architectural Metals or equal.
 - a. Provide at all gates and other locations as noted.
 - b. Where indicated and required by the Drawings, provide custom fabricated cane bolt assembly.
- 5. In-Ground Cane Bolt Sleeve: Nominal 1/2 inch steel pipe x 12-inches long (0.84 inch outside diameter and 0.62 inch inside diameter).
 - a. Provide for each gate leaf at both open and closed positions.
 - b. Exact open position shall be verified and approved by Architect prior to installing sleeve.
- 6. Miscellaneous Hardware: Items of hardware, including padlock and eyes, shall be fabricated by the fence manufacturer.
- 7. Exit Device: Provide as indicated.

2.4 GALVANIZING

- A. Hot-dip galvanize interior and exterior surfaces of all steel fence components.
 - 1. Fence components shall include pickets, horizontal rails, perimeter gate frame, posts, post caps, fittings, plates, astragals, lock box, security screen, accessories and appropriate hardware, and other components as shown in assembly.
 - 2. Hot dip galvanizing is not to be provided at exit devices or lever hardware.
- B. Surface Preparation Prior to Galvanizing: In accordance with SSPC Specification SP-10, "Near White Blast Cleaning."
- C. Comply with ASTM A153 for galvanizing of iron and steel hardware.
- D. Comply with ASTM A123 for galvanizing of assembled steel products and rolled, pressed, and forged-steel shapes, plates, bars, and strips 1/8 inch thick and heavier.
- E. Newly galvanized items shall not be water quenched or chromate quenched after galvanizing if they are scheduled to receive a paint coating.

2.5 PROTECTIVE PAINT COATINGS

A. General:

- 1. Comply with manufacturer's preparation and application instructions for each coating and NAAMM's "Metal Finishes Manual for Architectural and Metal Products" for recommendations for applying and designating finishes. Manufacturer's instructions shall govern in event of conflict.
- 2. Coatings shall be shop-applied to the greatest extent possible, including galvanized items, except surfaces and edges to be field welded.
- 3. Corrosion Control: Prevent galvanic action and other forms of corrosion by insulating metals from direct contact with incompatible materials.
- 4. Steel members shall be protected and be free of corrosion when ready to receive field-applied finish coatings. Apply coatings before rusting occurs.
- 5. Metal shall be degreased.
- 6. Finish exposed fasteners to match adjacent metal.

B. Products:

- 1. Galvanized Metal Repair Compound: "ZRC Galvalite", single component, high zinc dust content (zinc rich) repair compound for iron, steel and galvanized metal by ZRC Worldwide, or equal.
- Finish Paints:
 - a. General:
 - Materials specified are from PPG Industries, Inc. and are intended to establish standard of quality for the specified coating system. Coatings of equal quality, appearance, and performance and offering

the same or better warranty as specified will be considered by the Architect.

- 2) Coating Color: Each coat shall be applied in a different color or shade from the preceding coat to aid in determining the uniformity, mil thickness and coverage of the coating.
- b. First Coat: "Amerlock 2 VOC" Self-priming Epoxy Coating, 4.0 to 8.0 mils DFT.
- c. Second and Third Coats: "Pitthane Ultra" Acrylic Aliphatic Urethane, 2.5 mils DFT per coat.
 - 1) Color: Match existing fence.
- d. Do not exceed manufacturer's recommended total system thickness.
- e. Paint additives are prohibited unless specified and approved by the Architect or the coating manufacturer.

C. Surface Preparation – Galvanized Surfaces:

- 1. General: Surfaces shall be cleaned and profiled prior to receiving applied coatings in accordance with ASTM D 6386 or ASTM D 7396 for sheet products.
 - a. Methods shall be selected based on age of galvanized coating, condition of surface and specified paint coating.
 - b. High spots and rough edges shall be smoothed out.
 - c. Care shall be taken not to damage the zinc coating.
- 2. Cleaning: Surface shall be prepared in accordance with SSPC SP-1 followed by application of pre-paint conditioner.
- 3. Comply with the additional requirements of the following:
 - a. Recommendations included in the AGA document "Duplex Systems: Painting Over Hot Dip Galvanized Steel."
 - b. Procedures required by the coating manufacturer.
- 4. Repair hot-dipped galvanized coating damaged in shop or during field erection/welding by coating with specified galvanized metal repair primer applied in accordance with manufacturer's recommendations.

D. Priming:

- 1. Surface Preparation: As specified.
- 2. Apply air-dried primer after cleaning and pretreatment, to provide a minimum dry film thickness.
- 3. Apply primer within 8 hours of preparation of surface or sooner if necessary to prevent rusting.

E. Preparation:

- 1. Before a surface is coated, it shall be cleaned carefully of all dust, dirt, mud, grease, oil, loose rust and other contaminants.
- 2. Galvanized surfaces shall be prepared and repaired as specified.

- 3. Immediately prior to painting, the prepared surface shall be inspected for compliance with the manufacturer's specified degree of surface preparation and requirements for warranty including subsequent inspection between coats.
- 4. Prepared, galvanized steel shall be coated within 8 hours of proper and accepted preparation.

F. Field Application of Coatings:

- 1. Materials shall be delivered to the job site in the original and unopened containers, plainly marked with the proper designation of the product, as well as the name of the manufacturer.
 - a. Coating materials at the job site shall be subject to inspection.
 - b. Materials shall be stored in a clean, dry, well ventilated place, protected from sparks, flame, direct rays of the sun, and excessive heat or cold.
 - c. The Contractor shall be solely responsible for the protection and safety of the materials stored at the job site.

2. Application Conditions:

- a. Exterior painting shall only take place when good weather conditions prevail.
- b. Painting shall not be undertaken during foggy or misty conditions or when precipitation is imminent.
- c. The temperature of the surface to be painted shall be at least 5-degrees F above the dew point. When substrate temperatures are high, care shall be taken during paint application to prevent formation of voids, pin holes, and bubbles due to the rapid evaporation of solvent. These requirements also apply during the curing stage of the coatings.

3. Protection of Surrounding Area:

- a. Surrounding area and surfaces not to be painted shall be protected during cleaning, preparation and painting operations.
- b. Drifting of overspray shall be controlled and contained during painting operations so that finish is contained to the work only.
- 4. Comply with the additional requirements specified in Section 09 9100, Painting.
- G. Curing Time: The manufacturer's required minimum or maximum curing time between coats shall be strictly adhered to. Applicator shall verify curing times with manufacturer.
- H. Application and Repair: The application shall leave no sags, runs or holidays. Damage, imperfections or holes in any coat shall be cleaned and repaired to conform to manufacturer's requirements in order to maintain the warranty prior to final inspection.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Examine the conditions under which the fencing is to be installed and advise the General Contractor of any conditions detrimental to the proper and timely completion of the work.

Work shall not proceed until unsatisfactory conditions have been corrected in a manner acceptable to the Installer.

B. The Contractor shall take field measurements for this work and notify the Architect of any discrepancies between plan and field dimensions.

3.2 INSTALLATION

- A. Install all-welded metal fencing system as indicated on the Drawings, reviewed submittals, and in accordance with industry standard and best practices.
- B. Upon receipt at job site, materials shall be checked to ensure that no damage occurred during handling or shipping. Contractor shall repair or replace material at no additional cost to the Owner.
- C. Fence and Gate Posts:
 - 1. Install per details shown on the drawings.
- D. Install all posts and panel sections plumb and level in accordance to plans in a workmanlike manner.

E. Gates:

- 1. Install plumb, level and secure for a full opening without interference.
- 2. Install hardware not previously installed in shop and adjust hardware for smooth operation.
- 3. Install in-ground sleeves flush to grade at both closed and open positions to accept cane bolts.

F. Field Welding:

- Comply with applicable AWS specification for procedures of manual shielded metal arc welding, for appearance and quality of welds and for methods used in correcting welding work.
- 2. Weld connections shall be limited to locations where fabrication cannot be shop welded because of shipping size limitations or conditions of installation.
- 3. Grind exposed welded joints smooth and restore finish to match finish of adjacent surfaces.
- G. Field Finishing: Provide painted finish utilizing preparation, coatings, and application process specified in Part 2.

END OF SECTION

i:\1504 scusd shade structures multiple sites\4.06 projman\32 3119.10_decorative metal fences and gates (all-welded).docx Last Updated: April 6, 2021

PART 1 - GENERAL

1.1 SUMMARY

- A. Summary Includes:
 - Storm drainage piping systems.

1.2 RELATED REQUIREMENTS

- A. Document 01 5000, Construction Facilities and Controls.
- B. Section 01 6116, Volatile Organic Compound (VOC) Restrictions, for VOC limits pertaining to adhesives, sealants, fillers, primers, and coatings.
- C. Section 31 0000, Earthwork.
- D. Section 31 2333, Trenching and Backfilling.
- E. Section 32 1200, Asphalt Concrete Paving.
- F. Section 32 1600, Site Concrete

1.3 REFERENCES AND STANDARDS

- A. California Building Code (CBC), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- B. California Green Building Standards Code (CAL Green), edition as noted on the Drawings, as adopted by the California Division of the State Architect (DSA).
- C. California Plumbing Code, (CPC), edition as noted on the Drawings.
- D. Local Jurisdiction: Any work within the street, highway or right-of-way shall be performed in accordance with the requirement of the governmental agencies having jurisdiction, and shall not begin until all of those governing authorities have been notified.

E. ASTM International (ASTM):

- 1. D 422-63 Test Method for Particle Size Analysis of Soil.
- 2. D698-00 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures, Using 5.5 lb (2.49 Kg) Rammer and 12 inch (304.8 mm) Drop.
- 3. D1556-00 Test Method for Density of Soil in Place by the Sand-Cone Method.
- 4. D1557-02 Test Methods for Moisture-Density Relations of Soils and Soil-Aggregate Mixtures Using 10 lb. (4.54 Kg) Rammer and 18 inch (457 mm) Drop.

STORM DRAINAGE UTILITIES SECTION 33 4000 21-1504

- 5. D 3017-05 Test Methods for Moisture Content of Soils and Soil-Aggregate Mixture by Nuclear Methods (Shallow Depth).
- 6. D 4318-05 Test Method for Liquid Limit, Plastic Limit, and Plasticity Limit.
- F. CALTRANS Standard Specifications.
- G. CAL-OSHA, Title 8, Section 1590 (e).

1.4 ADMINISTRATIVE REQUIREMENTS

- A. Submittal Procedures:
 - 1. Action Submittals and Informational Submittals shall be submitted in accordance with Section 01 3300, Submittal Procedures.
 - 2. Closeout Submittals shall be submitted in accordance with Section 01 7700, Closeout Procedures.
 - 3. Sustainable Design Submittals shall comply with the additional requirements of Section 01 8113, Sustainable Design Requirements.

1.5 ACTION SUBMITTALS

- A. Provide supplier's descriptive literature for all products to demonstrate compliance with specified attributes.
- B. Substitution: Provide all data of proposed material being submitted as a substitution. Provide comparison with specified product data and identify all differences. Failure to provide comparison will be reason for rejection.

1.6 INFORMATIONAL SUBMITTALS

- A. Qualification Data: Contractor / installer.
- B. Provide sieve analysis from accredited testing lab on pipe bedding material. Analysis shall have a current date not older than project contract signing date.
- C. Sustainable Design:
 - 1. General:
 - a. Submit information necessary to establish and document compliance with the California Green Building Standards Code.
 - b. Sustainable design submittals are in addition to other submittals.
 - 2. The following information shall be provided:
 - a. Adhesives and Sealants: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.
 - b. Paints and Coatings: Evidence of compliance that products meet maximum VOC content limits specified in Section 01 6116.

1.7 CLOSEOUT SUBMITTALS

A. Guarantee: Submit subcontractor's guarantee.

1.8 QUALITY ASSURANCE

- A. Contractor / Installer shall have been in business for five (5) years providing/finishing similar size projects and complexity.
- B. Contractor shall be solely responsible for all subgrades built. Any repairs resulting from inadequate compaction are the responsibility of the contractor.
- C. The representatives of the Owner's testing lab will not act as supervisor of construction, nor will they direct construction operations. Neither the presence of the Owner's testing lab representatives nor the testing by the Owner's testing lab shall excuse the contractors or subcontractors for defects discovered in their work during or following completion of the project. Correcting inadequate compaction is the sole responsibility of the contractor.
- D. Use only new materials and products, unless existing materials or products are specifically shown otherwise on the Drawings to be salvaged and re-used.
 - 1. Sun damaged or discolored PVC pipe will be rejected.
- E. All materials, components, assemblies, workmanship and installation are to be observed by the Owner's Project Inspector. Work not so inspected is subject to uncovering and replacement.

1.9 DELIVERY, STORAGE AND HANDLING

- A. Transport, store and handle in strict accord with the local jurisdiction and manufacturer's written recommendations
- B. Deliver undamaged products to job in manufacturer's sealed containers and/or original bundles with tags and labels intact.

1.10 EXISTING SITE CONDITIONS

- A. Contractor shall acquaint himself with all site conditions. If unknown active utilities are encountered during work, notify Architect promptly for instructions. Failure to notify will make Contractor liable for damage to these utilities arising from Contractor's operations subsequent to discovery of such unknown active utilities.
- B. Existing civil, mechanical and electrical improvements are shown on respective site plans to the extent known. Should the Contractor encounter any deviation between actual conditions and those shown, he is to immediately notify the Architect before continuing work.

STORM DRAINAGE UTILITIES SECTION 33 4000 21-1504

1.11 PROTECTION

- A. Adequate protection measures shall be provided to protect workmen and passers-by on and off the site. Adjacent property shall be fully protected throughout the operations. Blasting will not be permitted. Prevent damage to adjoining improvements and properties both above and below grade. Restore such improvements to original condition should damage occur. Replace trees and shrubs outside building area disturbed by operations.
- B. In accordance with generally accepted construction practices, the Contractor shall be solely and completely responsible for working conditions at the job site, including safety of all persons and property during performance of the work. This requirement shall apply continuously and shall not be limited to normal working hours.
- C. Any construction review of the Contractor's performance conducted by the Geotechnical Engineer is not intended to include review of the adequacy of the Contractor's safety measures, in, on, or near the construction site.
- D. Provide shoring, sheeting, sheet piles and/or bracing to prevent caving, erosion or gullying of sides of excavation.
- E. Surface Drainage: Provide for surface drainage during period of construction in manner to avoid creating nuisance to adjacent areas. The contractor shall make a reasonable effort on a daily basis to provide pumps and all equipment necessary to keep all excavations and the site free from water during entire progress of work, regardless of cause, source, or nature of water.
- F. Adjacent streets and sidewalks shall be kept free of mud, dirt or similar nuisances resulting from earthwork operations.
- G. The site and adjacent influenced areas shall be watered as required to suppress dust nuisance. Dust control measures shall be in accordance with the local jurisdiction.
- H. Trees: Carefully protect existing trees that are to remain.

1.12 SEASONAL LIMITS

A. No fill material shall be placed, spread or rolled during unfavorable weather conditions. When work is interrupted by rains, fill operations shall not be resumed until field tests indicate that moisture content and density of fill are satisfactory.

1.13 TESTING

- A. General: Refer to Section 01 4523 Testing and Inspection Services, and Structural Tests and Inspections List, DSA-103.
- B. Geotechnical Engineer: Owner is retaining a Geotechnical Engineer to determine compliance of fill with Specifications, and to direct adjustments in fill operations. Costs of Geotechnical Engineer will be borne by Owner; except those costs incurred for retests or re-inspection will be paid by Owner and backcharged to Contractor.

1.14 RECORD DRAWINGS

- A. Keep a daily record of all pipe placed in ground, verified by Project Inspector.
- B. Upon completion of this Contract, furnish one tracing showing all outside utility lines, piping, etc., installed under this Contract. Locate and dimension all work with reference to permanent landmarks.
- C. All symbols and designations used in preparing "RECORD" drawings shall match those used in Contract drawings.
- D. Properly identify all stubs for future connections, as to location and use, by setting of concrete marker at finished grade in the manner suitable to Architect.

PART 2 - PRODUCTS

2.1 DESIGN AND PERFORMANCE CRITERIA

- A. Sustainable Design:
 - 1. VOC emissions for field-applied adhesives, sealants, and sealant primers must comply with limits specified in Section 01 6116.
 - 2. VOC emissions for field-applied paints and coatings must comply with limits specified in Section 01 6116.

2.2 MATERIALS

- A. Pipe: Use one of the following, unless noted on the Drawings otherwise.
 - 1. Polyvinyl Chloride Pipe (PVC): SDR35 conforming to ASTM D3034 with elastomeric joints conforming to ASTM D3212 for pipe to 12". Sun damaged pipe will be rejected.
 - 2. High density polyethylene pipe (HDPE): The pipe shall be corrugated exterior/smooth interior pipe. 12" to 60" maximum diameter shall conform to AASHTO M294, water tight per ASTM D3212 with water tight gasket fittings.
- B. Perforated Pipe (for subdrains): Shall be ADS N12 pipe, 3 hole, ASTM F 405, AASHTO M 252; PCV ASTM D3034 SDR-35 storm drain pipe
- C. Manhole: Shall be as shown on the drawing details.
- D. Drop Inlet: Shall be as shown on the drawing details.
- E. Curb Inlet: Shall be as shown on the drawing details.
- F. Mortar: For pipe connections to concrete drainage structures, conform to ASTM C270 type N mortar. Place within one half hour after adding water.
- G. Crushed Rock: Imported washed crushed rock. Minimum 100% passing 3/4 inch sieve.

STORM DRAINAGE UTILITIES SECTION 33 4000 21-1504

- H. Trench drain: Polycast, Polydrain or equal and as shown on drawings.
- I. Area Drains: Shall be as shown on the drawing details.
- J. Floor Drains: Shall be as shown on the drawing details.
- K. Clean-outs: Shall be as shown on the drawing details.
- L. Planter drains: Shall be as detailed on the drawing details.
- M. Filter Fabric: Mirafi 140N.

PART 3 - EXECUTION

3.1 INSPECTION LAYOUT AND PREPARATION

- A. Prior to installation of the work of this Section, carefully inspect and verify by field measurements that installed work of all other trades is complete to the point were this installation may properly commence
- B. Layout all work, establish grades, locate existing underground utilities, set markers and stakes, setup and maintain barricades and protection facilities; all prior to beginning actual earthwork operations. Layout and staking shall be done by a licensed Land Surveyor or Professional Civil Engineer.
- C. Verify that specified items may be installed in accordance with the approved design.
- D. In event of discrepancy, immediately notify Owner and the Architect. Do not proceed in discrepant areas until discrepancies have been fully resolved.

3.2 EXCAVATION AND BACKFILLING

- A. General: Installation shall be in strict conformance with referenced standards, the manufacturer's written directions, as shown on the drawings and as herein specified.
- B. Verify invert elevations at points of connection to existing systems prior to any excavation. If invert elevations differ from that shown on drawings, notify Architect immediately.

C. Excavation and Bedding:

- 1. General: Trench straight and true to line and grade with bottom smooth and free of irregularities or rock points. Trench width in accordance with pipe manufacturer's recommendations and as per the drawings. Follow manufacturer's recommendations for use of each kind and type of pipe.
- 2. Bedding: Provide bedding as detailed on plans for the full length of the pipe. Bedding shall have a minimum thickness beneath the pipe of 4" or 1/8 the outside diameter of the pipe, which ever is greater. Provide bell holes and depressions for pipe joints only of size required to properly make joint.

- 3. If the trenches for the site drainage fall within areas to be lime treated, the piping shall be installed prior to any lime treatment operations.
 - a. If additional piping is added to previously lime treated areas, the contractor shall backfill the trench with class 2 aggregate base and compact to 95%.

D. Laying of Pipe:

- 1. General: Inspect pipe prior to placing. Set aside any defective or damaged material. Do not place pipe in water nor place pipe when trenches or weather are unsuitable. Lay pipe upgrade, true to line and grade.
- 2. Bell and Spigot Joints: Lubricate inside of bells and outside of spigots with soap solution or as recommended by manufacture. Wedge joints tight. Bell of bell and spigot pipe to be pointed upgrade.
- 3. Pipe shall be bedded uniformly throughout its length.
- 4. Pipe elevation shall be within 0.02 feet of design elevation as shown on plans.
- 5. Off Site Work: All work beyond the property lines shall be done in strict conformance with the requirements of the governing agency.

E. Backfilling:

- 1. General: Do not start backfill operations until required testing has been accomplished.
- Trenches and Excavations: Backfill with material as detailed on plans, filling both sides of the pipe at the same time, carefully tamping to hold pipe in place without movement. Refer to Section 31 2333 – TRENCHING AND BACKFILLING for fill above this layer.
- F. Grouting of Pipes: Grout pipes smooth and water tight at drop inlet, manholes, and curb inlets. Grout back side of hood at curb inlets all grouting shall be smooth and consistent.
- G. Off Site Work: All work beyond the property lines shall be done in strict conformance with the requirements of the local agency.
- H. Cutting and Patching: Remove and replace existing surface features per applicable specification section (i.e. asphaltic concrete or concrete paving) where pipe is installed in areas of existing improvements.

3.3 TOLERANCES

- A. Storm Drain structure grates
 - 1. In landscape and lawn areas +- 0.05'.
 - 2. In sidewalk and asphalt pavement +-0.025'.
 - 3. In curb and gutter application +-0.0125'.

B. Cleanout Boxes and Lids

1. In landscape areas; 0.10 higher than surrounding finish grade, +-0.05'.

STORM DRAINAGE UTILITIES SECTION 33 4000 21-1504

2. In sidewalks and asphalt pavement; Flush with surrounding finish grade, +- 0.025'.

3.4 **DEWATERING**

A. Contractor to provide trench dewatering as necessary, no matter what the source is, at no additional cost to the owner.

3.5 FLUSHING

A. The Contractor shall thoroughly ball and flush the storm drain system to remove all dirt and debris. Discharge water to an approved location.

3.6 CLEANING

- A. Upon completion of work of this Section promptly remove from the working area all scraps, debris and surplus material of this Section.
- B. Clean the dirt, rocks, and debris from the drop inlets and storm drain manholes.

END OF SECTION